


**SERIES****CR**
PumpAgents.com
 Wholesale Pump Agents

CLOSE COUPLED TURBINE PUMPS

APPLICATIONS

- Carpet Cleaning Machines
- Small Steam Generators
- Solar Heating Systems
- Booster Pump
- Injector Venturi Operation
- Cleaning and Flushing
- Low Flow Circulating
- Spray Nozzles
- Liquid Transfer
- Coolant Pump
- Aeration

BURKS exclusive, unique regenerative type turbine pumps are designed to handle clear water and many other nonabrasive, lower viscosity liquids on high pressure/low capacity applications with the greatest possible efficiency.

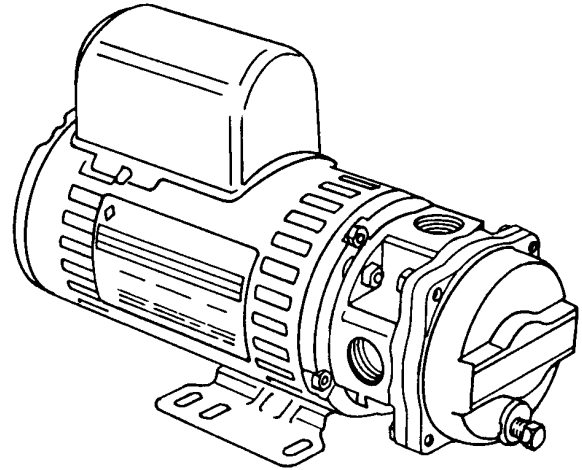

www.PumpAgents.com

60 HZ - PERFORMANCE										
Catalog Number		HP		TOTAL HEAD						
			PSI (kPa) FEET (M)	10.8 (74) 25 (7.6)	21.6 (149) 50 (15.2)	32.5 (224) 75 (22.8)	43.3 (299) 100 (30.4)	54.1 (373) 125 (38.1)	64.9 (447) 150 (45.7)	75.8 (523) 175 (53.3)
115V	230V			CAPACITY IN G.P.M. (L.P.S.)						
A3CR6M	3CR6M	1/3		4.3 (0.27)	3.9 (0.24)	3.6 (0.23)	3.4 (0.21)	3.2 (0.2)	3.0 (0.19)	2.9 (0.18)

 3450
RPM

50 HZ - PERFORMANCE										
Catalog Number		HP		TOTAL HEAD						
			PSI (kPa) FEET (M)	10.4 (72) 24 (7.3)	20.8 (143) 48 (14.6)	37.7 (260) 87 (26.5)	49.4 (341) 114 (34.7)	55.4 (382) 128 (39.0)	68.4 (472) 158 (48.2)	81.9 (565) 189 (57.6)
	220V			CAPACITY IN G.P.M. (L.P.S.)						
	L3CR6M	1/3		3.6 (0.23)	3.2 (0.20)	2.8 (0.18)	2.6 (0.16)	2.5 (0.16)	2.3 (0.15)	2.1 (0.13)

 2900
RPM


A Crane Co. Company

PUMPS & SYSTEMS

PumpAgents.com - buy pumps and parts online

FEATURES

- Compact Size-Ideal for OEM Applications
- All Bronze Construction with Monel Impeller Blades
- Carbon/Ceramic Shaft Seal for Temperatures to 225°F (107°C)
- #316 Stainless Steel Shaft
- Close Coupled Design - No Couplings or Alignment Problems
- Motors have ball/ball bearing construction and open ventilated enclosure. Motors are **NOT** drip-proof. Rated for continuous duty operation at all ratings shown.
- Capacitor Start Motors Have Built-In Automatic Overload Protection
- Furnished with UL Recognized Motor Lead
- Field Adjustable Impeller for Extended Service Life



- Easy to Service
- Every Pump Factory Tested

MAXIMUM OPERATING CONDITIONS

TEMPERATURE (For Standard Buna-N Seal)	225°F (107°C)
INLET PRESSURE	50 PSI (344kpa)
CASING WORKING PRESSURE	150 PSI (1034kpa)
VISCOSITY	200 SSU

MATERIALS OF CONSTRUCTION

PART	ALL BRONZE
Frame/Raceway	Bronze
Impeller	Bronze (Monel Blades)
Shaft	#316 Stainless Steel
Front Cover	Bronze
Shaft Seal	Carbon-Ceramic S. Steel-Buna-N

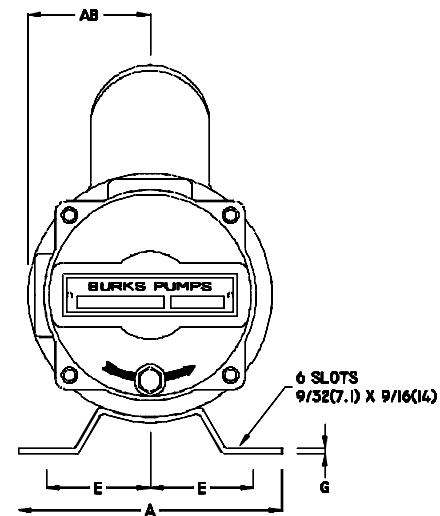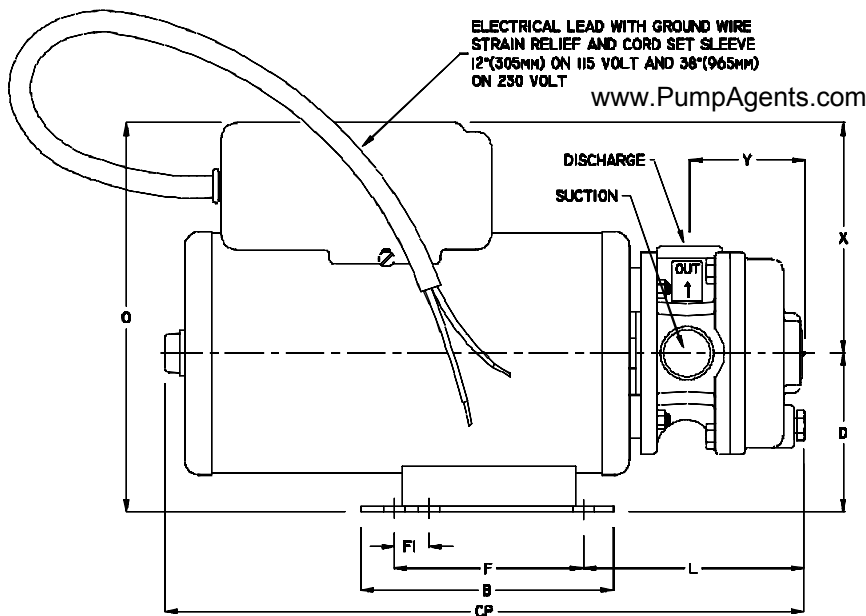

Tappings		DIMENSIONS IN INCHES													
Disc. NPT	Suct. NPT	Motor Frame	A	AB	B	CP*	D	E	F	F1	G	L	O*	X	Y
1/2"	1/2"	36	4	1 ⁷ / ₈	3 ¹ / ₄	10 ¹ / ₂	2 ¹ / ₄	1 ¹ / ₂	2 ¹ / ₂	⁵ / ₈	¹ / ₁₆	3 ⁵ / ₈	6 ¹ / ₄	1 ³ / ₄	2



Tappings		Motor Frame	DIMENSIONS IN MILLIMETERS												
Disc. NPT	Suct. NPT		A	AB	B	CP*	D	E	F	F1	G	L	O*	X	Y
1/2"	1/2"	36	102	48	83	267	57	38	64	16	1.6	92	159	44	51

* Approximate maximum dimension

A strainer, approximately 20 mesh, should be installed on the suction side of the pump to prevent chips, scale or hard foreign particales from entering the pump and damaging the raceway and impeller.



CLOSE COUPLED TURBINE PUMPS

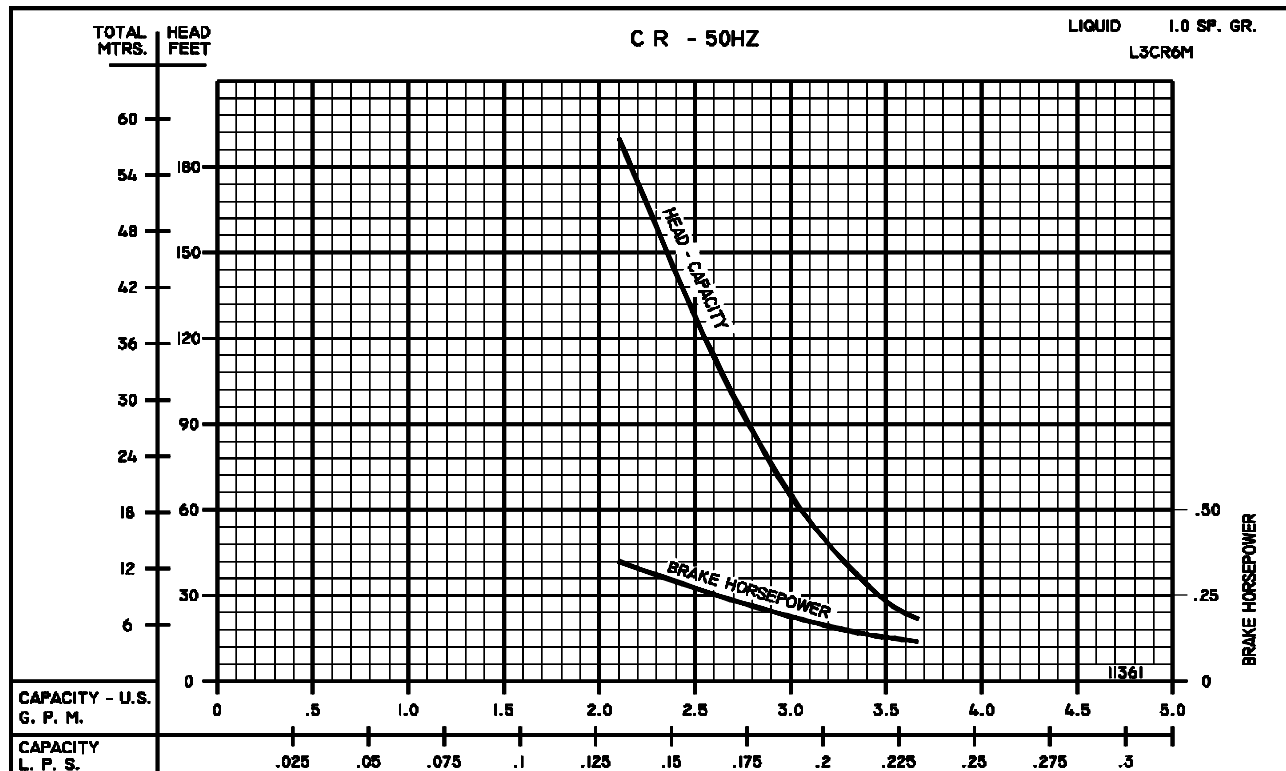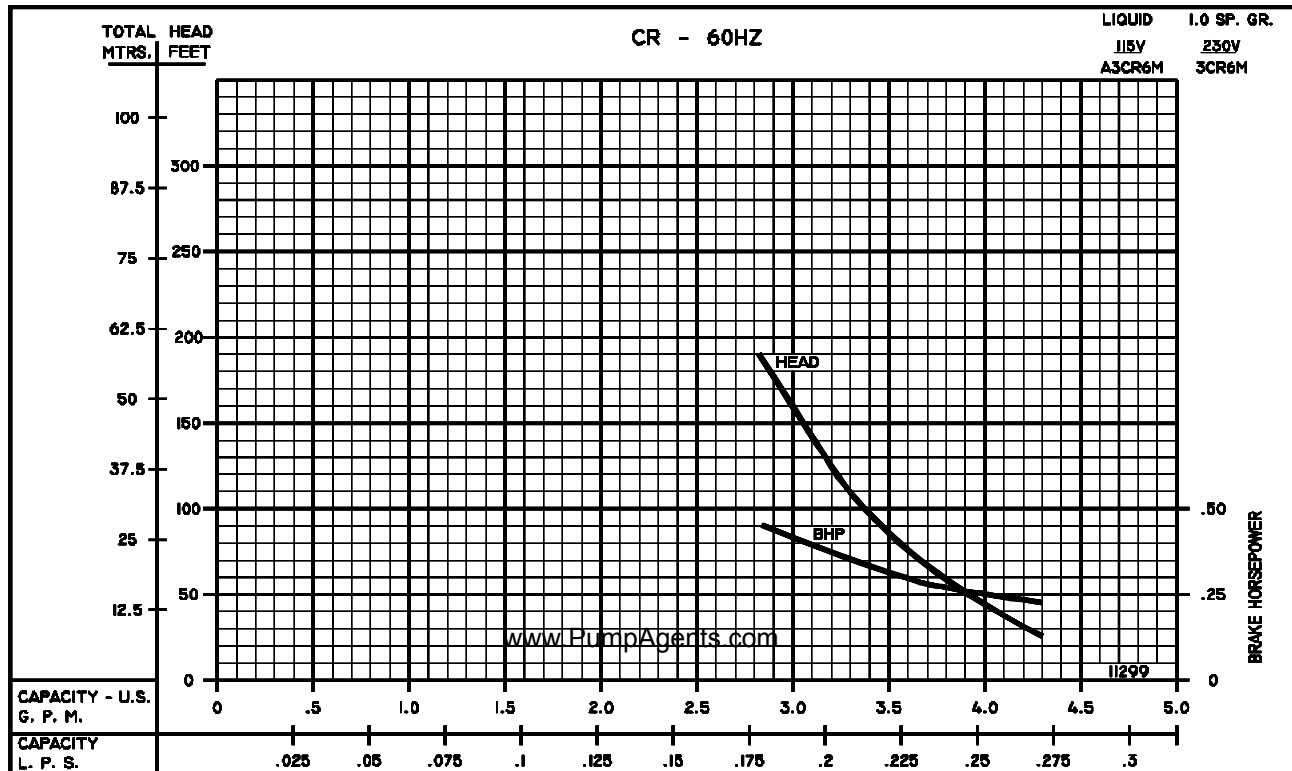

PUMPS & SYSTEMS

A Crane Co. Company

For technical advice or service please take your pump into your local pump service center.
To order pump or parts or for pricing please go to the following links :

[Burks Pumps Home >>](#)

[Burks Pumps stock list >>](#)