

4E-34N SERIES



Features


- Epoxy coated die-cast aluminum housing
- Oil-filled motor
- 23.1' maximum lift
- 210 watts
- 1/2" MNPT discharge
- Thermal overload protection
- For submersible use only

Construction

- Motor 1/12 HP Oil Filled Heavy Duty
- Intermittent Liquid Temp 120° F
- Intake 3/4" FNPT
- Discharge 1/2" MNPT
- Housing Epoxy coated cast aluminum
- Cover Epoxy coated cast aluminum
- Volute Nylon
- Impeller Nylon
- Shaft Seal Viton®
- Screen Polypropylene


Small submersible oil-filled pump with epoxy coated cast aluminum housing. For commercial, industrial and home applications including statuary fountains, water displays, air conditioners, machine tool coolants, and many other applications where liquid must be transferred or recirculated. This compact 710 GPH pump features

4E-34N SERIES

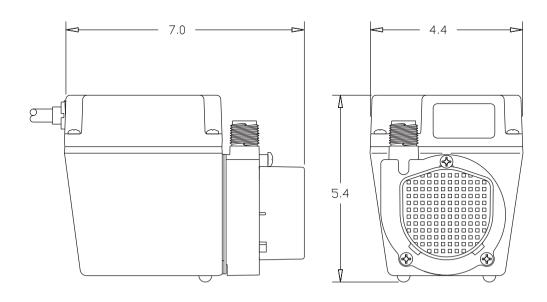

Specifications

Model	Item										Performance (GPH @ Head)					Shut Off		l Weight
No.	No.	Discharge	Intake	Listing(s)	HP	Volts	Hertz	Amps	Watts	1'	3'	5'	10'	20'	Feet	PSI	(ft)	(Lbs.)
4E-34N	504103	1/2" MNPT	3/4" FNPT	UL	1/12	115	60	3.5	210	710	690	670	580	150	23.1	10.0	6	8.50
4E-34NT	504186	1/2" MNPT	3/4" FNPT	UL/CSA	1/12	115	60	3.5	210	710	690	670	580	150	23.1	10.0	10	8.50

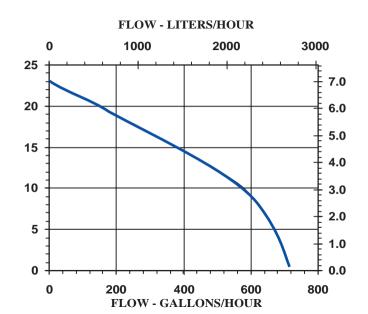

Replacement Parts

Volute	103334
Screen	102909
Impeller	104435
Gasket	103601

Little Giant Pump Co.