

Little **GIANT**[®] Pump Company

2E-N SERIES



Features

- Epoxy coated die-cast aluminum housing
- Oil-filled motor
- 11.8' maximum lift
- 100 watts
- 1/4" MNPT discharge
- Thermal overload protection
- For submersible use only


Construction

- Motor — 1/40 HP Oil Filled
- Intermittent Liquid Temp up to — 120° F
- Intake — Hooded/Screened
- Discharge — 1/4" MNPT
- Housing — Epoxy coated cast aluminum
- Cover — Epoxy coated cast aluminum
- Volute — Nylon
- Impeller — Nylon
- Shaft Seal — Nitrile
- Screen — Polypropylene

Small submersible oil-filled pump with epoxy coated cast aluminum housing. For commercial, industrial and home applications including statuary fountains, water displays, air conditioners, machine tool coolants, and many other applications where liquid must be transferred or recirculated. This compact 300 GPH pump features


Little Giant Pump Co.

2E-N SERIES

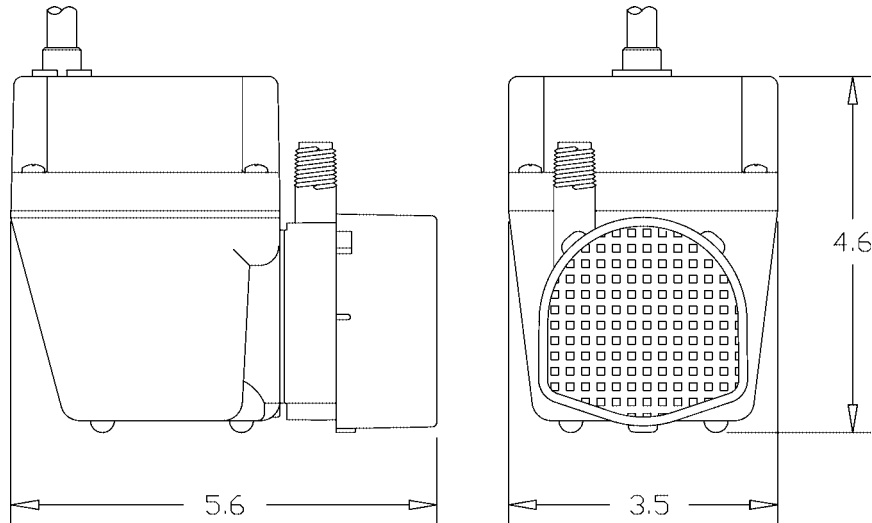

Specifications

Model No.	Item No.	Discharge		Listing(s)	HP	Volts	Hertz	Amps	Watts	Performance (GPH @ Head)				Shut Off		Pwr. Cord (ft)	Weight (Lbs.)
		Size								1'	3'	5'	10'	Feet	PSI		
2E-N	502103	1/4" MNPT		UL	1/40	115	60	1.7	100	300	255	205	70	11.8	5.1	6	4.67
2E-NT	502186	1/4" MNPT		UL/CSA	1/40	115	60	1.7	100	300	255	205	70	11.8	5.1	10	5.00
2E-NY	502116	1/4" MNPT		UR	1/40	230	50/60	1.0/.85	100	300	255	205	70	11.8	5.1	12	5.17

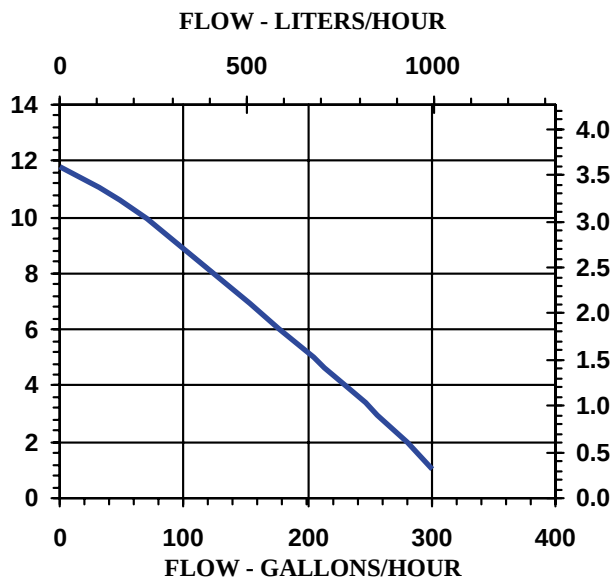

Replacement Parts

Volute	102333
Impeller	102470
Screen	102909
Gasket	102601

Little Giant Pump Co.

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Little Giant Pumps Home >>](#)

[Little Giant Pumps stock list >>](#)