# Little GIANT ® Pump Company


# Eliminator Series Sump/Effluent Pumps

## **BE SERIES**




### **Features**

- Handles liquids and solid waste materials up to 3/4 diameter.
- Cast iron pump housing with protective epoxy coating for corrosion resistance
- Oil-filled motor housing for lifetime lubrication and rapid heat dissipation
- Stainless steel fasteners
- Mechanical seals (stainless steel spring, nitrile parts, Carbon and ceramic faces)
- Bearings: Upper and Lower Sintered Sleeve
- Thermal overload protection
- Manual and Automatic models
- Automatic operation has 9 to 14 "On" level and 2 to 6 "Off" level range
- All 115 volt models are UL/CSA listed.

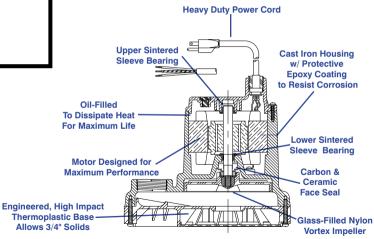

# PumpAgents.com - Click here for Pricing/Ordering

## 8E SERIES SUMP/EFFLUENT PUMP

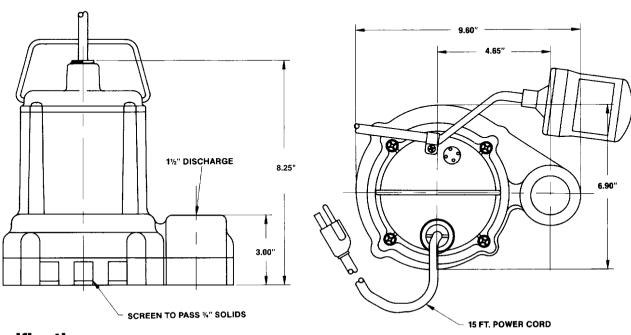


### **Specifications**

MODEL	ITEM	LISTING	HP	VOLTS	SOLIDS SIZE	RUNNING	PERFO	RMANCE	(GPM @	HEAD)	SHUTOFF	P.S.I.	PWR. CRD.	WEIGHT	DIMENSIONS
NO.	NO.				(Dia. In.)	AMPS/WATTS	5'	10'	15'	20'	(Ft.)		(Ft.)	(Lbs.)	(HxLxW in.)
8E-CIM	509000	UL/CSA	1/3	115	3/4	11/900	52	45	33	_	21	9.1	10	24	8.25 x 9.6 x 6.9
8E-CIA-RFS	509100	UL/CSA	1/3	115	3/4	11/900	52	45	33	_	21	9.1	10	25	8.25 x 9.6 x 6.9
8E-CIM	509050	UL	1/3	230	3/4	6/900	52	45	33	_	21	9.1	12	23	8.25 x 9.6 x 6.9
8E-CIM	509005	UL/CSA	1/3	115	3/4	11/900	52	45	33	_	21	9.1	15	24	8.25 x 9.6 x 6.9
8E-CIA-RFS	509105	UL/CSA	1/3	115	3/4	11/900	52	45	33	_	21	9.1	15	26	8.25 x 9.6 x 6.9
8E-CIA-RFS	509120	UL/CSA	1/3	115	3/4	11/900	52	45	33	_	21	9.1	20	26	8.25 x 9.6 x 6.9
8E-CIM	509125	UL/CSA	1/3	115	3/4	11/900	52	45	33	_	21	9.1	25	25	8.25 x 9.6 x 6.9

All models are 60 Hz.

#### 8E SERIES PUMP PERFORMANCE CURVE



### Construction

Motor Housing	Epoxy Coated Cast Iron					
Impeller Material	Nylon					
Impeller Type	Vortex					
Volute	Epoxy Coated Cast Iron					
Power Cord	SJTW-A					
Mechanical Shaft Seal	Nitrile with carbon and ceramic faces					
Fasteners	Stainless Steel					
Shaft	Cold Rolled Steel					
Bearings	Upper and lower sintered sleeve bearings					