
Little CITAL Representation of the Company Pump Agents.com - Click here for Pricing/Ordering Representation of the Company Rep

10E-CIA-SFS SERIES




Features

- Handles liquids and solid waste materials up to 3/4" diameter
- Cast iron pump housing with protective epoxy coating for corrosion resistance
- Oil-filled motor housing for lifetime lubrication and rapid heat dissipation
- Stainless steel handle, fasteners and switch guard
- Mechanical seals (Stainless Steel Spring, Nitrile parts, Carbon and Ceramic faces)
- Thermal overload protection
- Automatic operation has 8 to 11 "On" level range and 2 to 5 "Off" level range
- PSC type motor with upper and lower ball bearings
- UL/CSAlisted

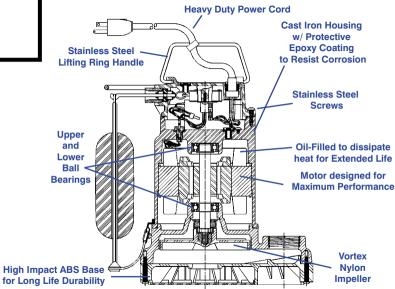

10E-CIA-SFS SERIES

SUMP/EFFLUENT PUMPS

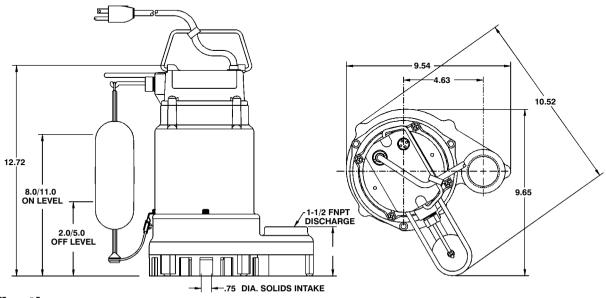

Specifications

MODEL	ITEM				SOLIDS SIZE	RUNNING	PERFORMA	NCE (GPN	M @ HEAD)	SHUT0FF		PWR. CRD.	WEIGHT	DIMENSIONS
NO.	NO.	LISTING	HP	VOLTS	(Dia. In.)	AMPS/WATTS	5'	10'	15'	(Ft.)	P.S.I.	(Ft.)	(Lbs.)	(H x L x W in.)
10E-CIA-SFS	511350	UL/CSA	1/2	115	3/4	8.2/958	80	68	53	24	10.4	10	38	12.72 x 10.52 x 9.65
10E-CIA-SFS	511355	UL/CSA	1/2	115	3/4	8.2/958	80	68	53	24	10.4	25	39	12.72 x 10.52 x 9.65

10E SERIES PERFORMANCE

Construction

Cover	Polycarbonate
Motor Housing	Epoxy Coated Cast Iron
Impeller Material	Nylon
Impeller Type	Vortex
Volute	Epoxy Coated Cast Iron
Power Cord	SJTW-A
Mechanical Shaft Seal	Nitrile with carbon and ceramic faces
Fasteners	Stainless Steel
Shaft	Steel
Bearings	Upper and lower ball bearings

