

Little GIANT[®]

Pump Company

PE-A SERIES



Features

- Epoxy encapsulated motor
- 4.5' maximum lift
- 17 watts
- 1/8" MNPT discharge
- Impedance protected
- For submersible use only


Construction

- Motor — 1/250 HP Epoxy Encapsulated
- Maximum Flow Rate — 80 GPH @ 1'
- Maximum Head — 4.5'
- Intermittent Liquid Temp. up to — 120° F
- Intake — Screened
- Discharge — 1/8" MNPT
- Housing — Glass-filled polyester
- Cover — Glass-filled polyester
- Volute — Glass-filled polyester
- Impeller — Polypropylene
- Shaft Seal — Viton[®]
- Screen — Polypropylene
- Electrical — 115V, 60HZ

Small submersible epoxy encapsulated pump designed for light duty water recirculation. Ideal for statuary and water displays. This compact 80 GPH pump features a 1/8" MNPT discharge, 4.5' shut-off head capability, screened inlet and a 6' power cord.


Little Giant Pump Co.

PE-A SERIES

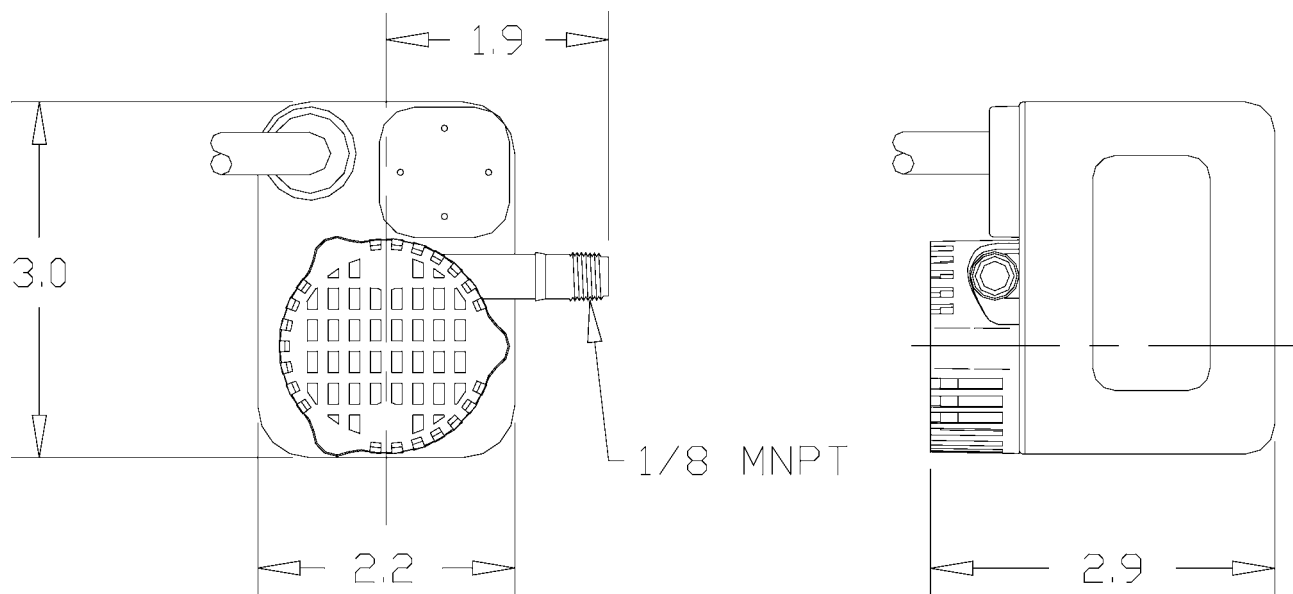

Specifications

Model No.	Item No.	Discharge		Listing(s)	HP	Volts	Hertz	Amps	Watts	Performance (GPH @ Head)		Shut Off		Pwr. Cord (ft)	Weight (Lbs.)
		Size								1'	3'	Feet	PSI		
PE-A	518100	1/8" MNPT		UL/CSA	1/250	115	60	0.3	17	80	50	4.5	2.0	6	2.08

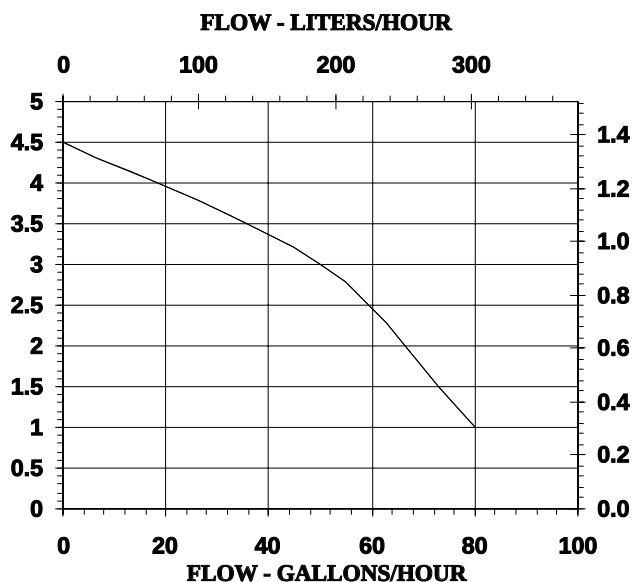

Replacement Parts

Plate	118922
Impeller	118443
Screen	118904

Little Giant Pump Co.

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Little Giant Pumps Home >>](#)

[Little Giant Pumps stock list >>](#)