NK-1 SERIES



Features


- Corrosion resistant nylon body
- Oil-filled motor
- 10.2' maximum lift
- 70 watts
- 1/4" MNPT discharge
- Thermal overload protection
- For submersible use only

Construction

- Motor 1/150 HP Oil Filled
- Intermittent Liquid Temp. up to 120° F
- Intake N/A
- Discharge 1/4" MNPT
- Housing Nylon
- Cover Nylon
- Volute Nylon
- Impeller Nylon
- Shaft Seal Viton®
- Screen Polyethylene


Small submersible oil-filled pump with corrosion resistant nylon housing. For commercial, industrial and home applications including statuary fountains, water displays, air conditioners, machine tool coolants, and many other applications where liquid must be transferred or recirculated. This compact 210 GPH pump features a 1/4"

NK-1 SERIES

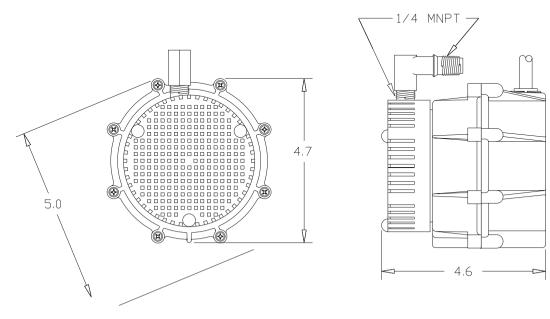

Specifications

								Performance (GPH @ Head)		Shut Off		Pwr. Cord Weight		
Model No.	Item No.	Discharge Size	HP	Volts	Hertz	Amps	Watts	1'	3'	5'	Feet	PSI	(ft)	(Lbs.)
NK-1	526003	1/4" MNPT	1/150	115	60	1.1	70	210	180	150	10.2	4.4	6	3.67



Replacement Parts

Volute	116375
Impeller	116437
Screen	101376
Seal Ring	928007
Back Plate	126377
Elbow	943076

Little Giant Pump Co.