

Little **GIANT**[®] Pump Company

34C-SPT



Features



- Permanently lubricated
- Epoxy coated cast aluminum housing
- Automatic, in-pan design
- Leak proof, rust proof, ABS plastic tank
- 1/2" MNPT discharge with check valve for 1/2" OD rigid-plastic or copper tubing
- 26' max lift

Construction

- Motor — 1/12 HP
- Intermittent Liquid Temp. up to — 120° F
- Intake — N/A
- Discharge — 1/2" MNPT
- Housing — Epoxy coated cast aluminum
- Cover — Epoxy coated cast aluminum
- Volute — Nylon
- Impeller — Nylon
- Shaft Seal — Nitrile
- Screen — Polyethylene

Little Giant Pump Co.

34C-SPT

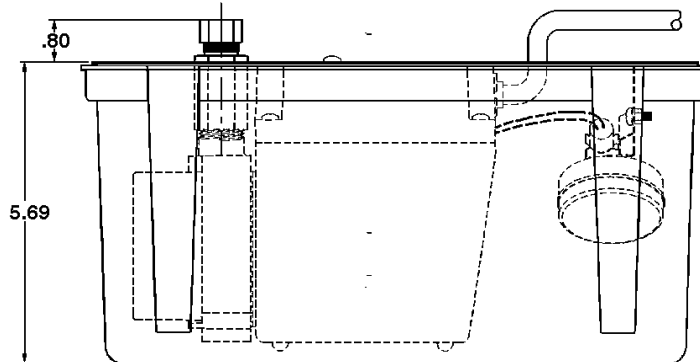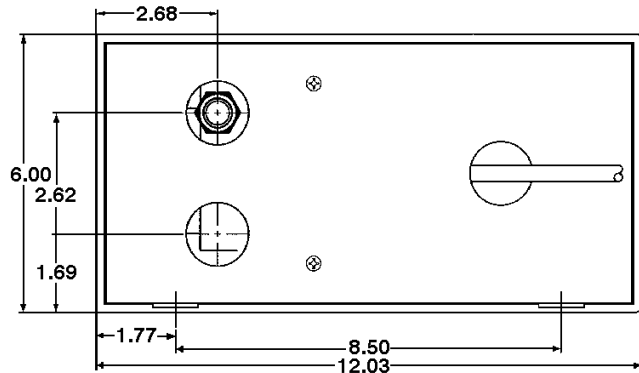


Specifications

Model No.	Item No.	Discharge Size	Listing(s)	HP	Volts	Hertz	Amps	Watts	Performance (GPH @ Head)					Shut Off		Pwr. Cord (ft)	Weight (Lbs.)	Height	Length	Width
									1'	3'	5'	10'	20'	Feet	PSI					
34C-SPT	551301	1/2" MNPT		1/12	115	60	3.5	210	310	290	280	250	110	26	11.2	6	6.25	11.00	12.00	6.00
34C-SPT	551311	1/2" MNPT		1/12	230	50/60	1.8	210	310	290	280	250	110	26	11.2	12	6.25	11.00	12.00	6.00

Replacement Parts

Tank	153502
Cover	151420
Float Lever Assy	151312
Check Valve	940003
Volute	103330
Screen	102909
Impeller	104435
Gasket	103601

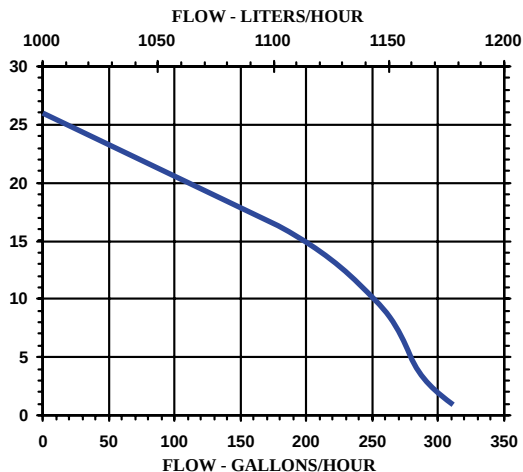

Little Giant Pump Co.

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Little Giant Pumps Home >>](#)

[Little Giant Pumps stock list >>](#)