


VCC-20 SERIES

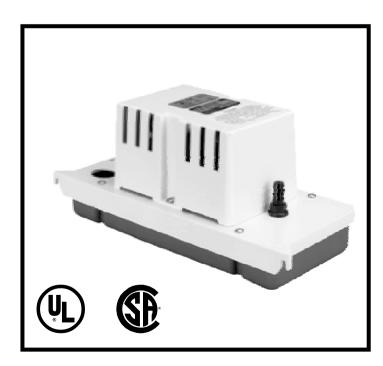

Features


- Low profile compact size
- Vertical type pump unit
- Leakproof, rustproof, ABS tank
- Stainless steel motor shaft
- 3/8" O.D. barbed discharge adapter
- Safety switch included
- 20' shut-off head
- 6' power cord
- UL/CSA listed
- Thermal overload protected
- Suitable for High-Efficiency, gas furnace condensate


Construction

- Motor 1/30 HP
- Intermittent Liquid Temp. up to 120° F
- Discharge 3/8" OD barbed
- Housing ABS
- Cover ABS
- Volute ABS
- Impeller Glass filled polypropylene

The VCC Series is a low profile compact size for applications with limited space. The reservoir has a 3/10 gallon capacity. Pumps feature a vertical-type pump with stainless steel motor shaft, rust proof, high impact ABS tank and motor cover. Discharge is a 3/8" O.D.barbed tubing adapter/check valve. Pump features a safety switch that


VCC-20 SERIES

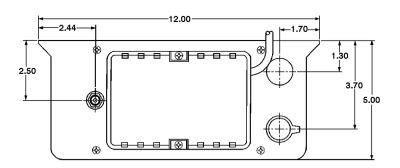



Specifications

									Performance (GPH @ Head)			Shut Off		Pwr.	Weight	
Model No.	Item No.	Discharge Size	Listing(s)	HP	Volts	Hertz	Amps	Watts	1'	5'	10'	20'	Feet	PSI	Cord (ft)	(Lbs.)
VCC-20ULS	554200	3/8" OD Barbed	UL/CSA	1/30	115	60	1.5	93	80	70	45	0	20	8.7	6	5.40
VCC-20ULS	554210	3/8" OD Barbed	UL	1/30	230	50/60	0.6	75	80	70	45	0	17	7.4	6	5.40

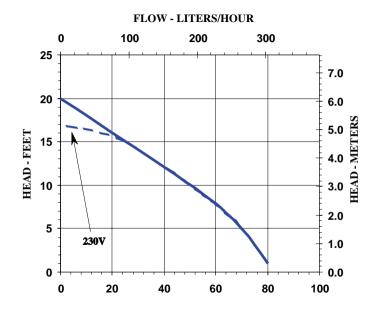

Replacement Parts

Tank	154004
Cover, Tank	154005
Motor Assy	979554
Impeller	154009
Volute	154015
Cover, Motor	154006
Check Valve	154715
Switch, Pump	950337
Seal Ring	928006
Safety Switch	154714
Float/Stem	154017
Adapter, 1/4"	154037

Little Giant Pump Co