

Little Giant®

SPBS



(battery charger only)

Features





- Serves as secondary sump pump, for added protection in case the primary sump pump fails due to power outages or other factors
- Pump includes built-in check valve
- Alarm buzzer activates when backup pump operates or battery is low
- System uses a non-mercury, mechanical float switch
- System includes a 1-1/4"-1-1/2" PVC slip-fit tee adapter for discharge pipe attachment
- Colored LEDs indicate backup pump system status

Construction

- Motor — 12 Volt DC
- Maximum Flow Rate — 880 GPH @ 3'
- Maximum Head — 14'
- Intermittent Liquid Temp. up to 120° F
- Intake — 1.3"
- Discharge — 1" MNPT
- Housing — Thermoplastic
- Volute — Thermoplastic
- Impeller — Thermoplastic
- Shaft Seal — Synthetic rubber radial lip seal
- Electrical — 12VDC Battery (not included)


This system serves as a secondary sump pump, for added protection from flooding in case the primary sump pump fails due to power outages, flow-blockage from obstruction in sump pit, etc. It also functions as an audible alarm if the primary pump fails, causing an unusually high water level in the sump.

SPBS

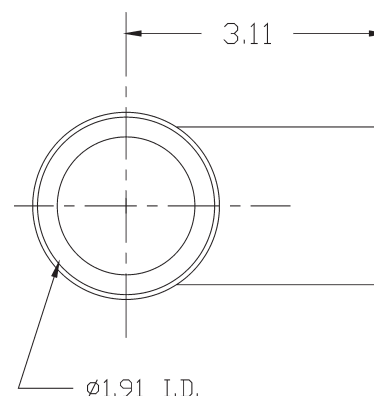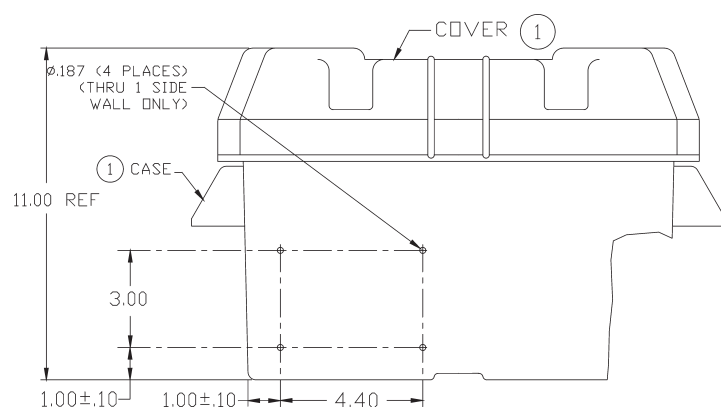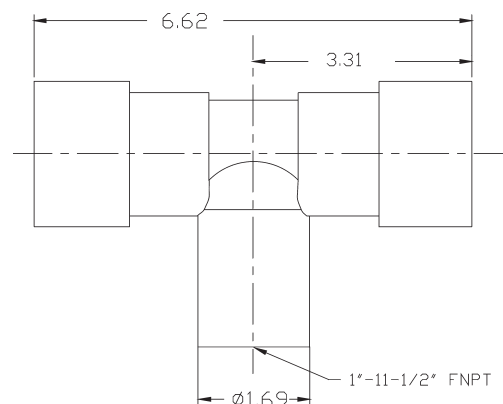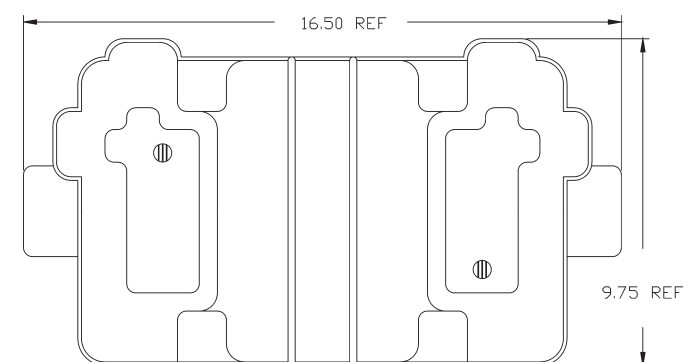

Specifications

Model No.	Item No.	Discharge	Listings	HP	Volts	Hertz	Amps	Watts	Performance (GPH @ Head)			Shut Off		Pwr. Cord (ft.)	Weight (lbs.)	Height (in.)	Length (in.)	Width (in.)
									3'	5'	10'	Feet	PSI					
SPBS	577400	1" MNPT	UL/CUL Battery Charger Only	N/A	115VAC Transformer/12VDC Pump	N/A	9.0	108	880	790	470	14	6.1	6	8.50	12	17	10

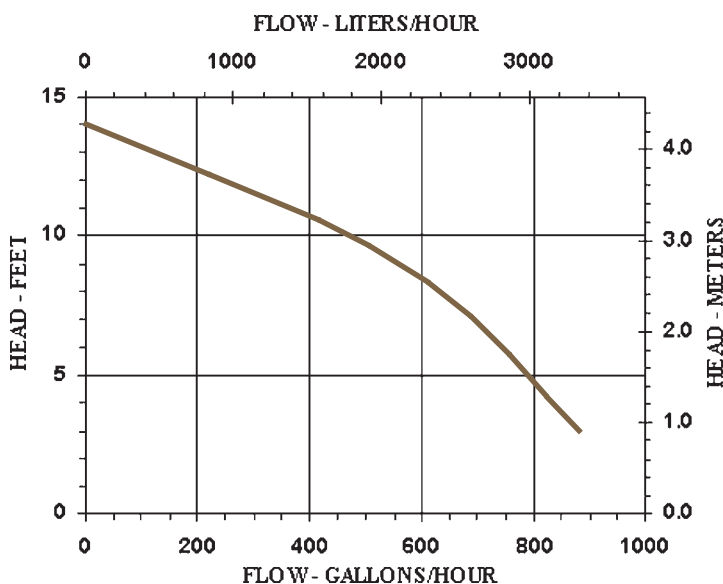

SPBS Series

Head (ft.)	Flow (GPH)	Head (m)	Flow (LPH)
3	880	0.9	3331
5	790	1.5	2990
6	1240	1.8	4693
8	630	2.4	2385
10	470	3.0	1779
12	240	3.7	908
14	0	4.3	0

Little Giant Pump Co.

PO Box 12010

Okla. City, OK 73157

Phone: 405.947.2511

Fax: 405.228.1550

www.LittleGiant.com

Form 996030 — 06/2002