

## 4-MD-SC



### **Features**

- Thermally Protected, Open, Fan Cooled, Permanent Split Capacitor Motor
- Sleeve Bearings
- 6' Power Cord with 3-Prong Plug
- Specific Gravity to 1.1
- Fluid Temperature to 150 Degrees F.
- Ambient Air Temperature to 77 Degrees F.
- NOTE: Consult your local distributor or the factory for applications with higher ambient temperatures, specific gravities and viscosities.


### Construction

- Volute Glass-filled Polypropylene
- Housing Glass-filled Polypropylene
- Impeller Glass-filled Polypropylene
- Shaft Ceramic
- Thrust Washers Ceramic
- O-Ring Nitrile

The Little Giant MD-SC series features leakproof, seal-less magnetic drives and are designed for in-line, non submersible use. Volute, magnet housing and impeller are glass-filled polypropylene for excellent chemical resistance. Ceramic shaft and thrust washers are 99.5% pure alumina for excellent wear and trouble-free service.

# PumpAgents.com - Click here for Pricing/Ordering


# 4-MD-SC

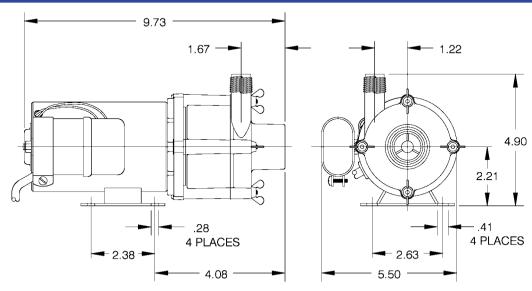


NOTE: Designs and dimensions may vary for various reasons (i.e. type of motor). This information should be used as general guide rather than an unqualified guarantee. Specifications are subject to change without prior notice.

### **Specifications**

Model	Item									Perfo	rman	e (GP	H @ F	lead)	Shu	t Off	Pwr. Cord	Weight
No.	No.	Intake	Discharge	Listing(s)	HP	Volts	Hertz	Amps	Watts	1'	3'	6'	9'	15'	Feet	PSI	(ft)	(Lbs.)
4-MD-SC	582503	1" FNPT	1/2" MNPT	UR/C-CSA	1/10	115	60	1.7	185	850	810	765	710	550	24.3	10.5	6	9.00
4-MD-SC	582598	1" FNPT	1/2" MNPT	F	amu	Head L	ess Mo	otor								0.0	6	2.00



#### FLOW - LITERS/HOUR



### **Replacement Parts**

ITEM	PART NO.	DESCRIPTION
A	182010	Volute
В	924007	O-Ring
С	921077	Thrust Washer
D	183132	Impeller
Е	180057	Shaft
F	182005	Housing
1	920003	Wing Nut
2	911403	Stud, Collared
3	183602	Drive Magnet
4	180037	Mtg. Bracket

Note: Parts A-F Contact Fluid.

### Little Giant Pump Co.