

TE-5.5-MD-SC



Features

- Thermally Protected, Totally Enclosed, Fan Cooled, Split Phase Motor
- Ball Bearings
- Conduit Box (Must be field wired)
- Specific Gravity to 1.1
- Fluid Temperature to 150 Degrees F.
- Ambient Air Temperature to 77 Degrees F.
- NOTE: Consult your local distributor or the factory for applications with higher ambient temperatures, specific gravities and viscosities.

Construction


- Volute Glass-filled Polypropylene
- Backplate Glass-filled Ryton
- Impeller Glass-filled Polypropylene w/ Carbon Bushing
- Shaft Ceramic
- Thrust Washers Ceramic
- O-Ring Viton®

The Little Giant MD-SC series features leakproof, seal-less magnetic drives and are designed for in-line, non submersible use. Volute, magnet housing and impeller are glass-filled polypropylene for excellent chemical resistance. Ceramic shaft and thrust washers are 99.5% pure alumina for excellent wear and trouble-free service.

www.PumpAgents.com

PumpAgents.com - Click here for Pricing/Ordering


TE-5.5-MD-SC

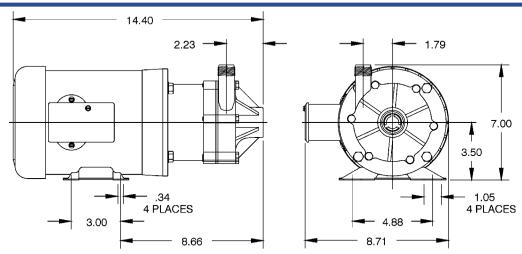


NOTE: Designs and dimensions may vary for various reasons (i.e. type of motor). This information should be used as general guide rather than an unqualified guarantee. Specifications are subject to change without prior notice.

Specifications

Model	Item									Perf	orman	ce (GP	H @ H	ead)	Shu	t Off	Pwr. Cord	Weight
No.	No.	Intake	Discharge	Listing(s)	HP	Volts	Hertz	Amps	Watts	5'	10'	20'	30'	40'	Feet	PSI	(ft)	(Lbs.)
TE-5.5-MD-SC	585504	1" FNPT	3/4" MNPT	UR/C-CSA	1/3	115	50/60	5.6/5.0	340/525	1900	1825	1550	1150	385	42	18.2	N/A	27.00
						230	50/60	2.8/2.5	340/525									
TE-5.5-MD-SC	585598	1" FNPT	3/4" MNPT	Pump Head Less Motor											7.00			

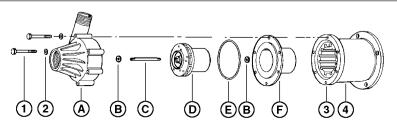

FLOW - LITERS/HOUR

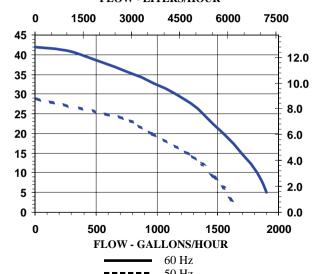

Replacement Parts

ITEM	PART NO.	DESCRIPTION
A	185110	Volute
В	187085	Thrust Washer
С	185100	Shaft
D	185128	Impeller
Е	924016	O-Ring
F	185181	Backplate
1	903712	Bolt
2	921050	Washer
3	185172	Drive Magnet
4	185162	Magnet Housing

Note: Parts A-F Contact Fluid.

Little Giant Pump Co.