

Little **GIANT** Pump Company®


Eliminator Series Sump/Effluent Pumps

HI-TEMPERATURE 10E SERIES



Features



- Handles liquids up to 200°F
- Handles liquids and solid waste materials up to 3/4" diameter
- Cast iron pump housing with protective epoxy coating for corrosion and rust resistance
- Oil-filled motor housing for lifetime lubrication and rapid heat dissipation
- Stainless steel fasteners
- Mechanical seals (stainless steel spring, Viton parts, carbon and ni-resist faces)
- Thermal overload protection
- Manual and Automatic models
- Automatic operation has 10" to 12" "On" level and 2" to 4" "Off" level range with integral mercury float switch
- All 115 volt models are CSA listed.

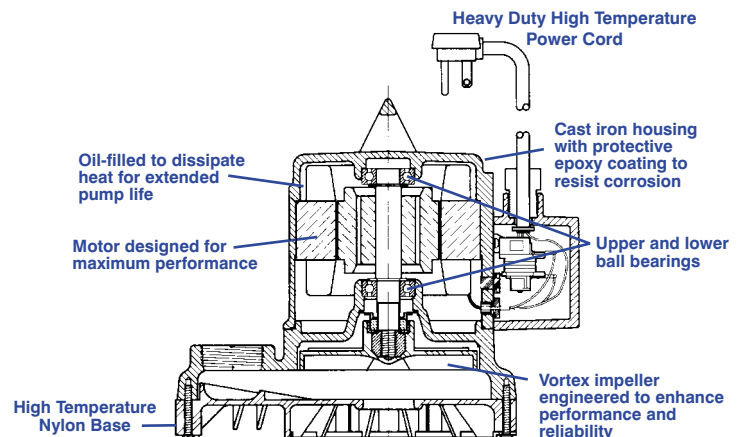

This high temperature version of the 10E Sump/Effluent Pump is capable of pumping up to 200°F liquid. Uses include


Little Giant Pump Co.

HI-TEMPERATURE 10E SERIES

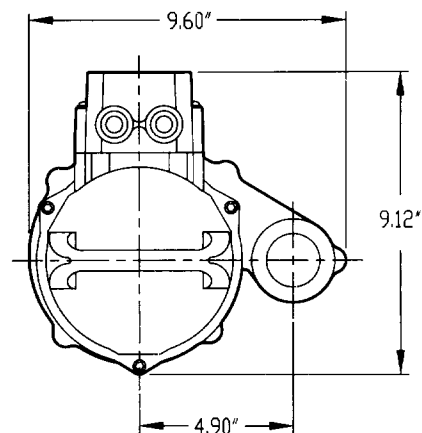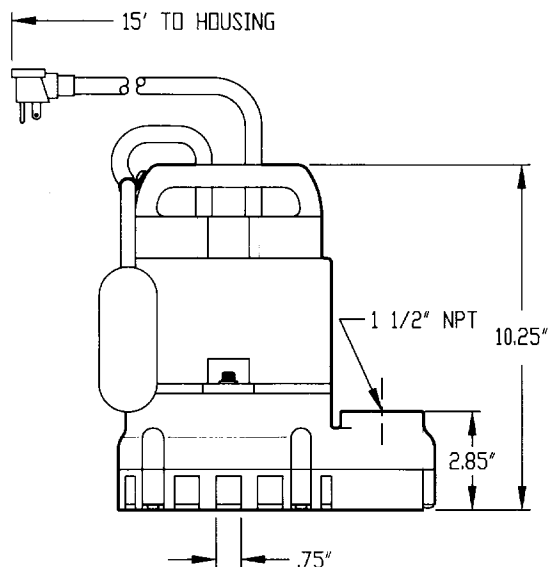

Specifications

MODEL NO.	ITEM NO.	LISTINGS	HP	VOLTS/ Hz	SOLIDS SIZE (Dia. In.)	RUNNING AMPS/WATTS	WATER TEMPS	PERFORMANCE (GPM @ HEAD)				SHUTOFF		PWR. CRD.	WEIGHT (Lbs.)	DIMENSIONS (H x L x W in.)
HT-10E-CIM	511600	CSA	1/2	115	3/4	10.5/900	73° F	80	70	59	37	24	10.4	15	37	10.25 x 9.6 x 9.12
							200° F	75	67	52	22	22	9.5			
HT-10E-CIA-FS	511700	CSA	1/2	115	3/4	10.5/900	73° F	80	70	59	37	24	10.4	15	37	10.25 x 9.6 x 9.12
							200° F	75	67	52	22	22	9.5			

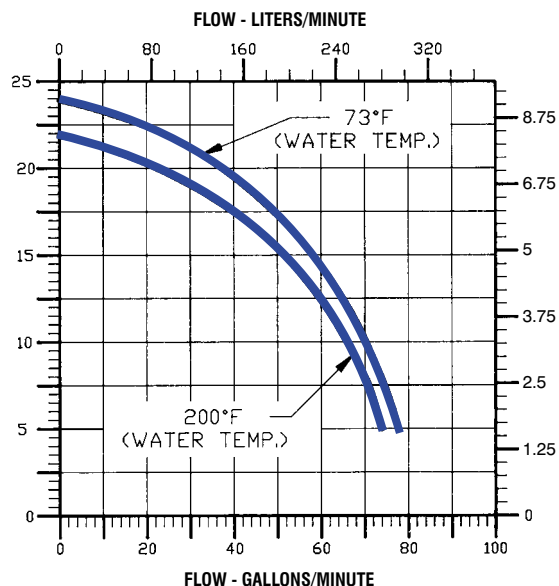

Construction

Motor housing	Epoxy-coated cast iron
Impeller material	Nylon
Impeller type	Vortex
Volute	Epoxy-coated cast iron
Power cord	15' 16-3 SJOW-A, Super Ultron II
Mechanical shaft seal	Viton, Stainless Steel, Carbon & Ni-Resist Faces
Fasteners	Stainless steel
Shaft	Stainless steel
Bearings	Upper and lower ball bearings

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Little Giant Pumps Home >>](#)

[Little Giant Pumps stock list >>](#)