


*Little Giant®*

---

## PE-2.5F-PW SERIES

---

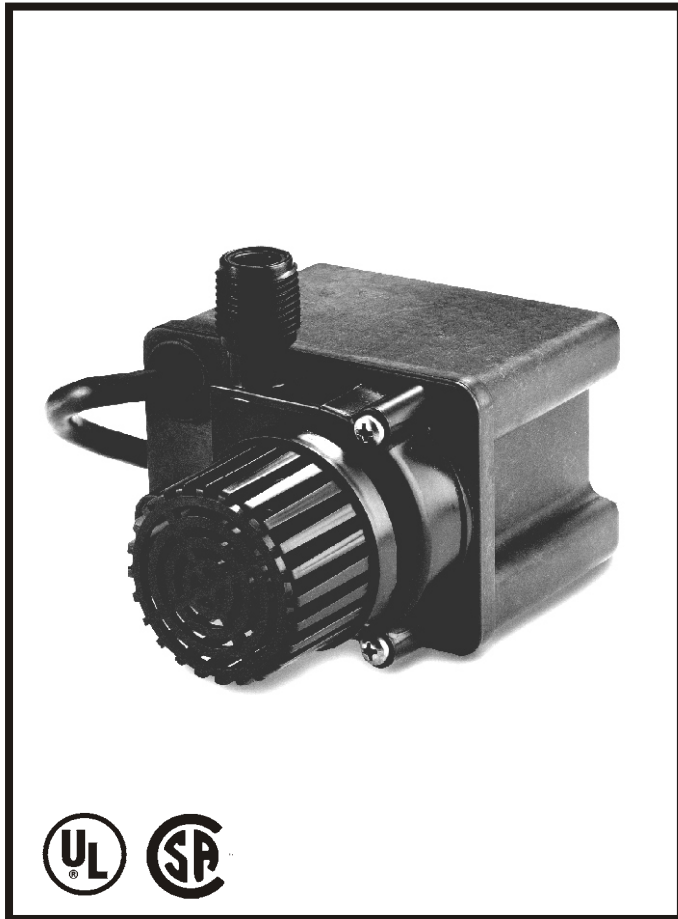


### **Features**

- Environmentally safe, oil-less
- Energy efficient
- Corrosion resistant body
- 15' Cord
- 13.4' maximum lift
- 80 watts
- 1/2" MNPT Discharge
- Discharge accepts 3/4" I.D. tubing
- For submersible use only

### **Construction**


- Motor — 1/28 HP Epoxy Encapsulated
- Intermittent Liquid Temp. up to — 120° F
- Intake — Screened
- Discharge — 1/2" MNPT
- Housing — Glass-filled polyester
- Cover — Glass-filled polyester
- Volute — Polypropylene
- Impeller — Nylon
- Shaft Seal — Viton®
- Screen — Polyethylene

# PE-2.5F-PW SERIES

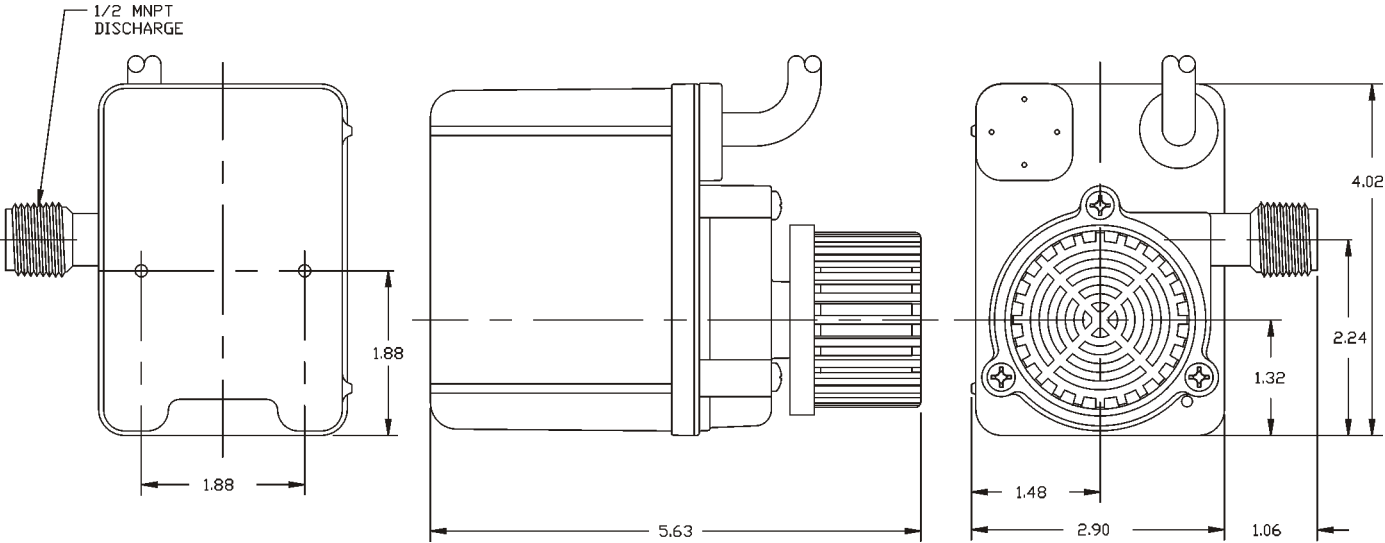

## Specifications

| Model No.  | Item No. | Discharge | Listings | HP   | Volts | Hertz | Amps | Watts | Performance (GPH @ Head) |     |     |     |     | Shut Off Feet | PSI | Pwr. Cord (ft) | Weight (Lbs.) |
|------------|----------|-----------|----------|------|-------|-------|------|-------|--------------------------|-----|-----|-----|-----|---------------|-----|----------------|---------------|
|            |          |           |          |      |       |       |      |       | 1'                       | 3'  | 5'  | 8'  | 10' |               |     |                |               |
| PE-2.5F-PW | 566633   | 1/2" MNPT | UL/CSA   | 1/28 | 115   | 60    | 1.4  | 80    | 475                      | 440 | 395 | 270 | 205 | 13.4          | 5.8 | 15             | 5.33          |

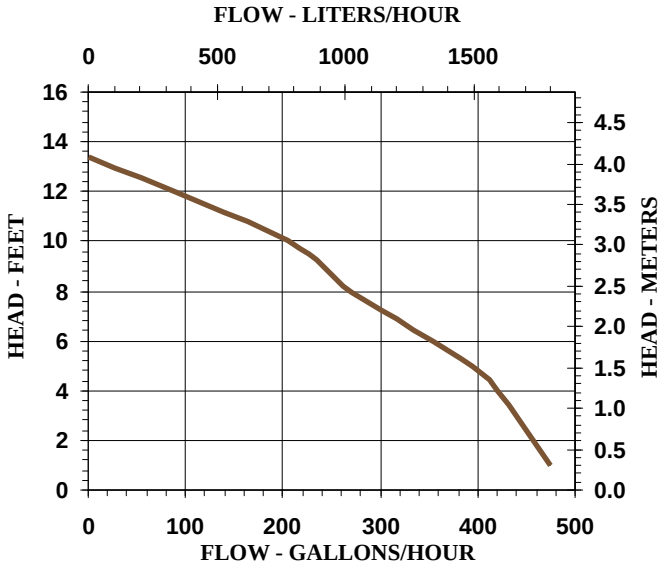

## Replacement Parts

|           |        |
|-----------|--------|
| Volute    | 118357 |
| Impeller  | 118444 |
| Screen    | 118911 |
| Seal Ring | 928011 |

---

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Little Giant Pumps Home >>](#)

[Little Giant Pumps stock list >>](#)