

MARINE PRODUCT DATA SHEET

OEM

1700-020-030 (1100 GPH)

AFTERMARKET

1700-021-030 (1100 GPH)



Bait Sentry Livewell Pump



TYPICAL APPLICATIONS

12V Bait/Livewell Application. For other applications, contact SHURflo.

PUMP

Type:	Centrifugal Pump
Port (Outlet):	1 1/8" Port
Port (Inlet):	3/4" NPT-M
Wash Down (Inlet):	1/2" NPT-F
Liquid:	130 °F [54 °C] Max
Prime:	Flooded Inlet
Inlet PSI:	30 PSI [2.1 Bar] Max
Run Dry:	Yes

ELECTRICAL

Motor:	12VDC Permanent Magnet, Continuous Duty
Protection:	External Fuse
Leads:	6 ft (1.8M) Twisted Jacketed Cable
Fuse:	6 Amp Recommended
Control:	No Control

MATERIALS

Housing:	High Strength Nylon
Impeller:	Acetal
Hardware:	Stainless Steel


APPROVALS

Ignition Protected, ISO 8846

WARRANTY

3 Year Limited Warranty
See SB-1050 For Full Warranty Details

Exploded View—No Parts Kits Available

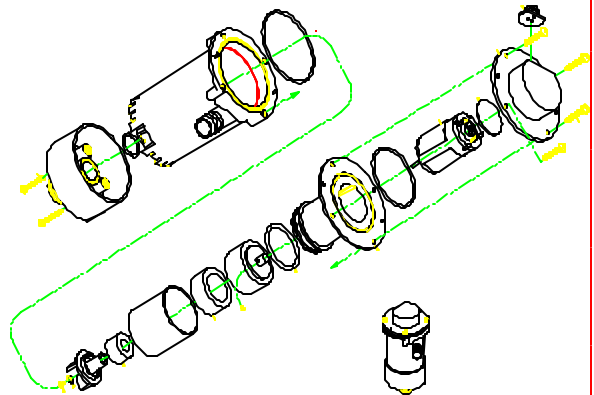

SHIPPING

Net Weight (Boxed):	2.5 Lb [1.1 Kg] each
Carton Weight:	14 Lb [6.3 Kg]
Pumps in Carton:	6
Carton Size:	16"L x 11"W x 11"H [41 cm x 28 cm x 28cm]

RELATED DOCUMENTS

Catalog:	MS-030-083 / 030-084
Installation Manual:	911-466
Maintenance:	911-466
Applications Spec Guide:	MS-020-005
Warranty:	SB-1041 / SB-1050



MARINE PRODUCT DATA SHEET

OEM

1700-020-030 (1100 GPH)


AFTERMARKET

1700-021-030 (1100 GPH)




TYPICAL PERFORMANCE @ 12V DC

PRESSURE		FLOW		CURRENT
METERS	FT OF HEAD	GPH	LPH	AMPS
0.0	0	1100	3028	4.3
1.5	5	390	1476	3.4
2.7	10	0	0	2.8

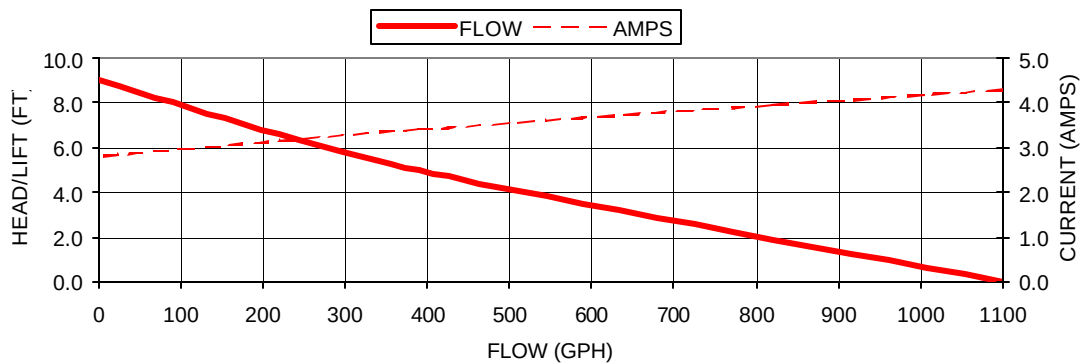

DIMENSIONS [mm]

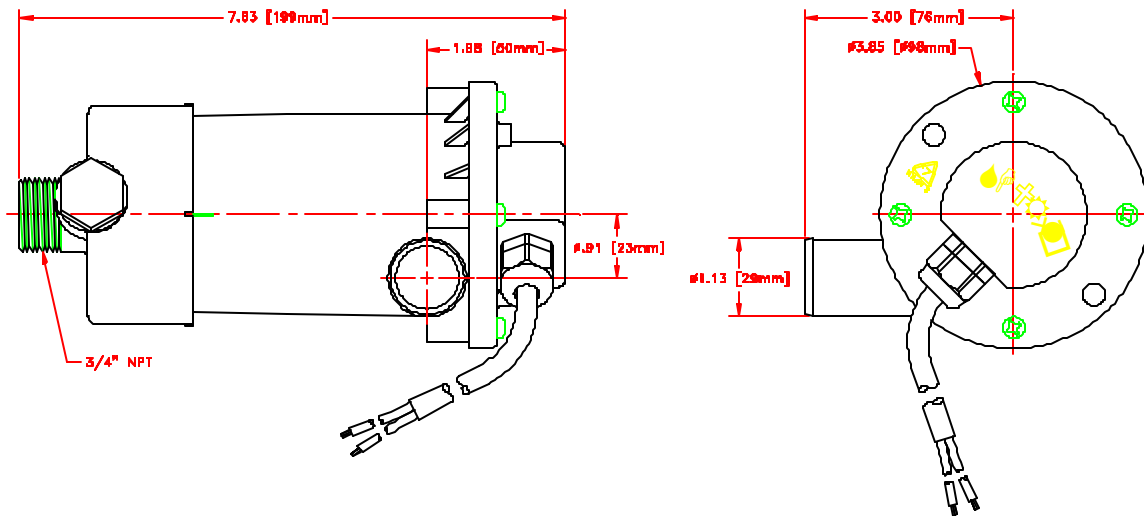

*ISO Registered Facility

PumpAgents.com - buy pumps and parts online

SHURflo reserves the right to update specifications, prices, or make substitutions.



For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)