

MARINE PRODUCT DATA SHEET

OEM

2088-752-244

AFTERMARKET

2088-574-344



The Blaster



TYPICAL APPLICATIONS

Marine wash down installations. Other uses may include 24 VDC pressurized water systems. This pump may be used for general water transfer. For other applications, contact SHURflo.

PUMP

Type: 3 Chamber Diaphragm
Ports: 1/2"-14 NPSM-Male
Liquid: 130 °F [54 °C] Max
Prime: 6 feet [1.82 M]
Inlet PSI: 30 PSI [2.1 Bar] Max
Run Dry: Yes

ELECTRICAL

Motor: 24VDC Permanent Magnet, Intermittent Duty
Protection: Thermal Overload, Automatic Restart
Leads: 16 AWG, 18" [45 cm] Red +, 13" [33 cm] Black -
Fuse: 10 Amp Recommended
Control: Adjustable Switch with Check Valve
Shut-Off 45 PSI [3.1 Bar] ± 5 PSI [0.4 Bar]
Restart 25 PSI [1.8 Bar] ± 5 PSI [0.4 Bar]

MATERIALS

Housing: Polypropylene
Valves: EPDM
Diaphragm: Santoprene
Hardware: Stainless Steel

APPROVALS

UL Marine, Ignition Protected, ISO 8846, c-UL

WARRANTY

1 Year Limited Warranty
See SB-1050 For Full Warranty Details


SHIPPING

Net Weight (Boxed): 5.4 Lb [2.5Kg] each
Carton Weight: 12 each, 65 Lb [29 Kg]
Carton Size: 24"L x 18"W x 11"H
[61cm x 46cm x 28cm]

RELATED DOCUMENTS

Catalog: MS-030-084
Installation Manual: 911-444
Maintenance: 911-444
Applications Spec Guide: MS-020-005
Warranty: SB-1050

Parts Kits

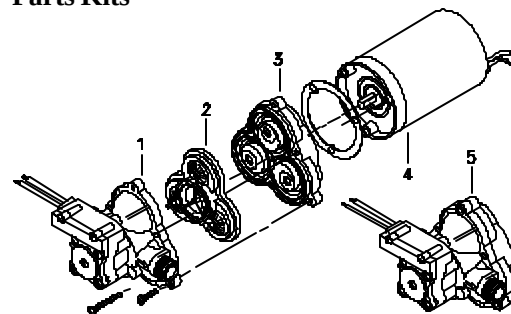

Number	Component	Parts Kit
1	Housing/Switch	94-231-10
2	Valve Assembly	94-232-06
3	Drive Assembly	94-238-03
4	Motor	11-187-06
5	Pump Head	94-236-14
Not Shown	Check Valve	94-237-00



MARINE PRODUCT DATA SHEET

OEM

2088-752-244


AFTERMARKET

2088-574-344




TYPICAL PERFORMANCE @ 24V DC

PRESSURE		FLOW		CURRENT
BAR	PSI	GPM	LPM	AMPS
0.0	0	3.2	12.1	1.8
0.7	10	2.7	10.2	2.4
1.4	20	2.4	9.0	2.9
2.1	30	2.1	7.9	3.2
2.8	40	1.8	6.8	3.4

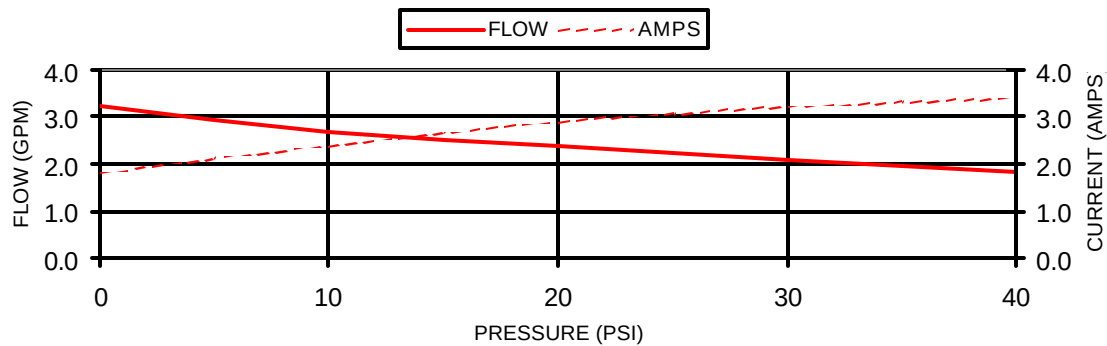

DIMENSIONS [mm]

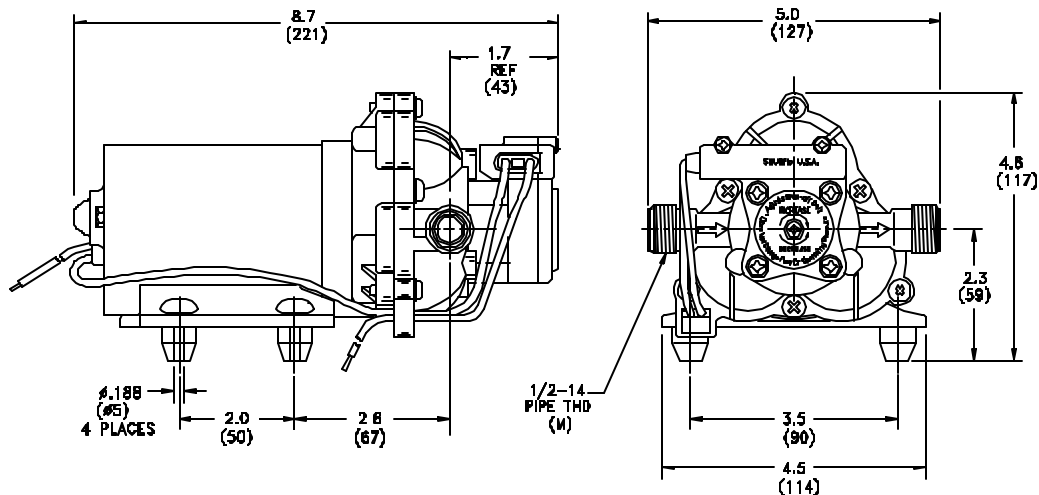

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)