



PRODUCT DATA SHEET

MODEL: 8000-542-296

SPECIFICATIONS:

MODEL NUMBER: 8000-542-296

PUMP DESIGN: Positive Displacement 3 Chamber Diaphragm Pump

CHECK VALVE: (1-Way Operation) Prevents Reverse Flow

CAM: 2.5 Degree

MOTOR: Permanent Magnet, P/N 11-111-00

VOLTAGE: 12 VDC Nominal

PRESSURE SWITCH: Adjustable Shut-Off (Range 40-60 PSI)

Factory Set @ 60 PSI, Turn On 45 PSI $\pm$ 5 PSI

LIQUID TEMPERATURE: 170 Degrees Fahrenheit (77 Degrees Centigrade) Max.

PRIME: Self-Priming Up To 9 Ft. Vertical,
Max. Inlet Pressure 30 PSI (2.1 Bar)

PORTS: 3/8"-18 NPT Female

MATERIAL OF CONSTRUCTION:

PLASTICS- Polypropylene

VALVES- Viton

DIAPHRAGM- Santoprene

FASTENERS- Zinc Plated Steel


NET WEIGHT: 4.6 Lbs (2.08 Kg)

DUTY CYCLE: Continuous (See Temperature Rise Chart)

TYPICAL APPLICATIONS: Agricultural Spraying


BYPASS: 60 PSI Springs

DIMENSIONS:

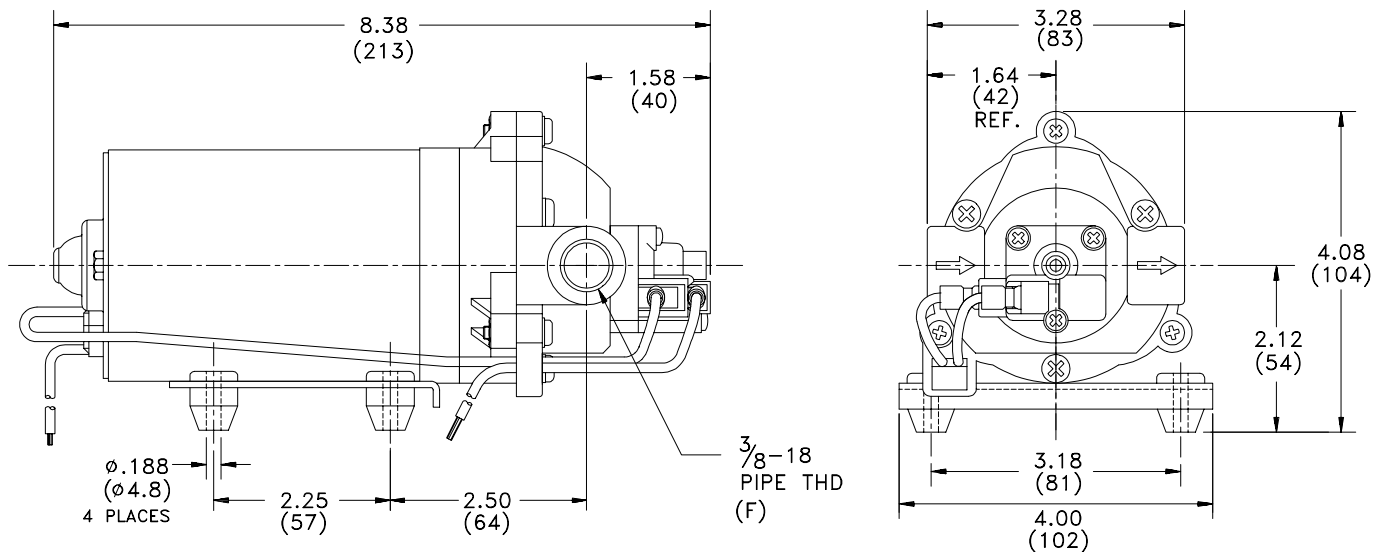


MODEL: 8000-542-296

TEMPERATURE RISE

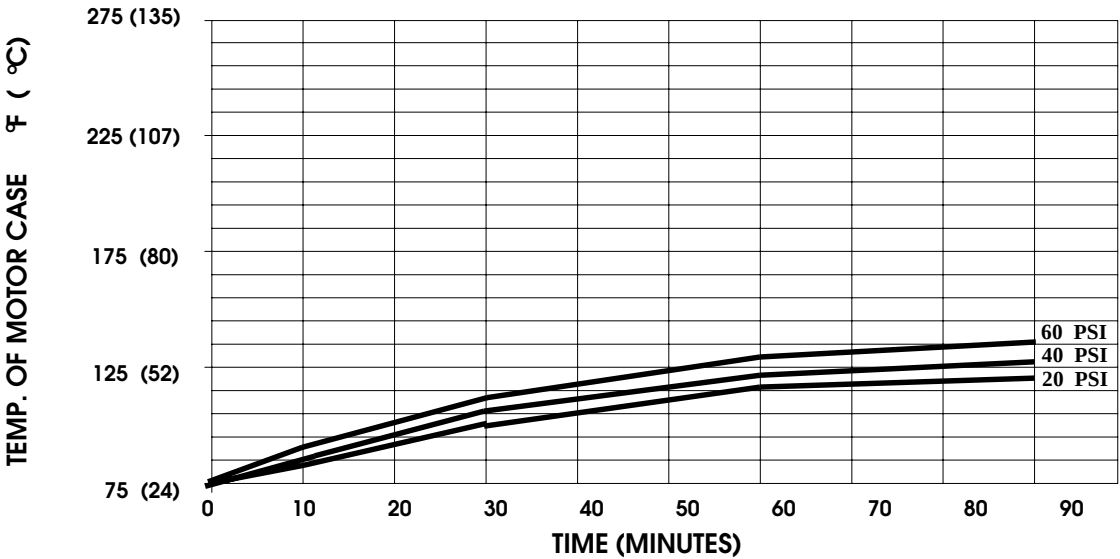

TYPICAL PERFORMANCE

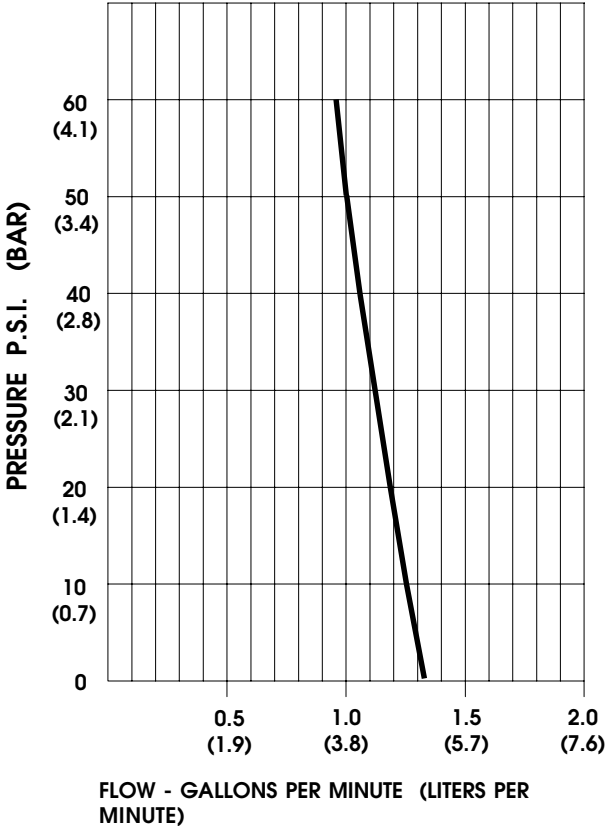

PRESSURE (PSI)	FLOW (GPM/LIT)	RPM MIN/MAX	CURRENT (AMPS)	VOLTAGE (VOLTS)
OPEN	1.32/5.0	2315/2385	2.5	12VDC
10	1.24/4.7	2285/2350	3.1	"
20	1.18/4.5	2250/2315	3.7	"
30	1.11/4.2	2220/2280	4.4	"
40	1.06/4.0	2190/2245	4.9	"
50	1.00/3.8	2155/2225	5.4	"
60	0.90/3.4	2125/2175	5.9	"

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)