

**PRODUCT DATA SHEET****MODEL: 8030-863-239****SPECIFICATIONS:****MODEL NUMBER:** 8030-863-239**PUMP DESIGN:** Positive Displacement 3 Chamber Diaphragm Pump**CHECK VALVE:** (2-Way Op.) Prevents Reverse Flow & 6 Ft. Head Forward Flow**CAM:** 3.0 Degree**MOTOR:** Permanent Magnet, P/N 11-223-00, Thermally Protected**VOLTAGE:** 115 VAC Nominal**PRESSURE SWITCH:** Adjustable Shut-Off (Range 140-160 PSI)

Factory Set @ 150 PSI, Turn On 115 PSI


LIQUID TEMPERATURE: 180 Degrees Fahrenheit (82 Degrees Centigrade) Max.**PRIME:** Self-Priming Up To 6 Ft. Vertical,
Max. Inlet Pressure 30 PSI (2.1 Bar)**PORTS:** 3/8"-18 NPT Female**MATERIAL OF CONSTRUCTION:**

PLASTICS- Nylon


VALVES- Viton

DIAPHRAGM- Santoprene

FASTENERS- Zinc Plated Steel

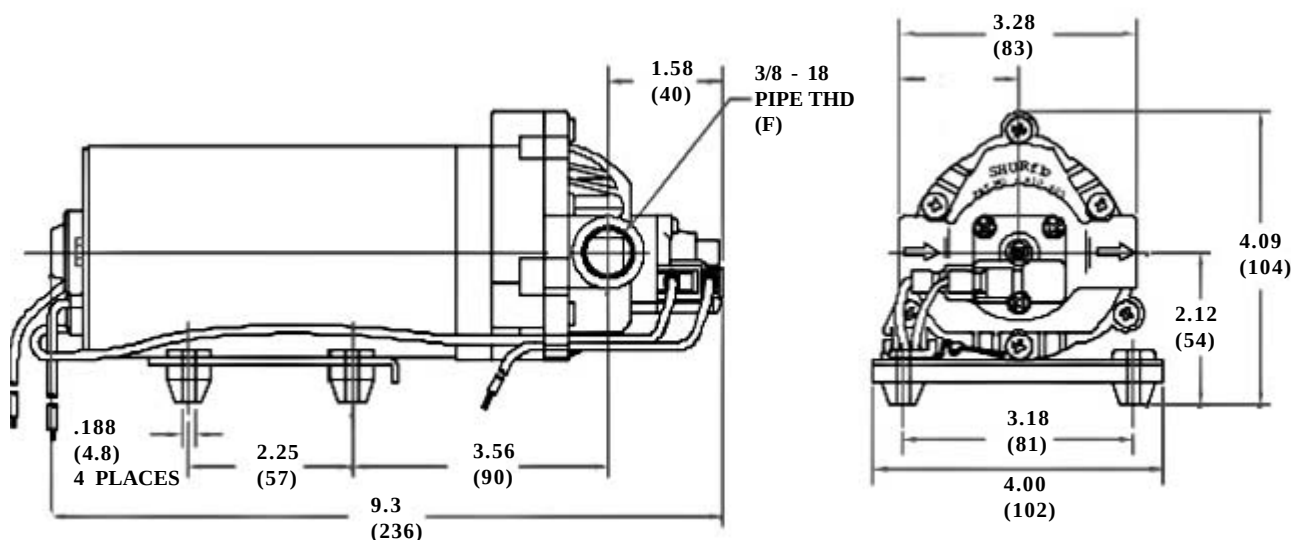
NET WEIGHT: 5.94 Lbs (2.7 Kg)**DUTY CYCLE:** Intermittent (See Temperature Rise Chart)**APPROVALS:** UL & CSA Recognized Component**TYPICAL APPLICATIONS:** Agricultural Spraying**DIMENSIONS:**

TEMPERATURE RISE

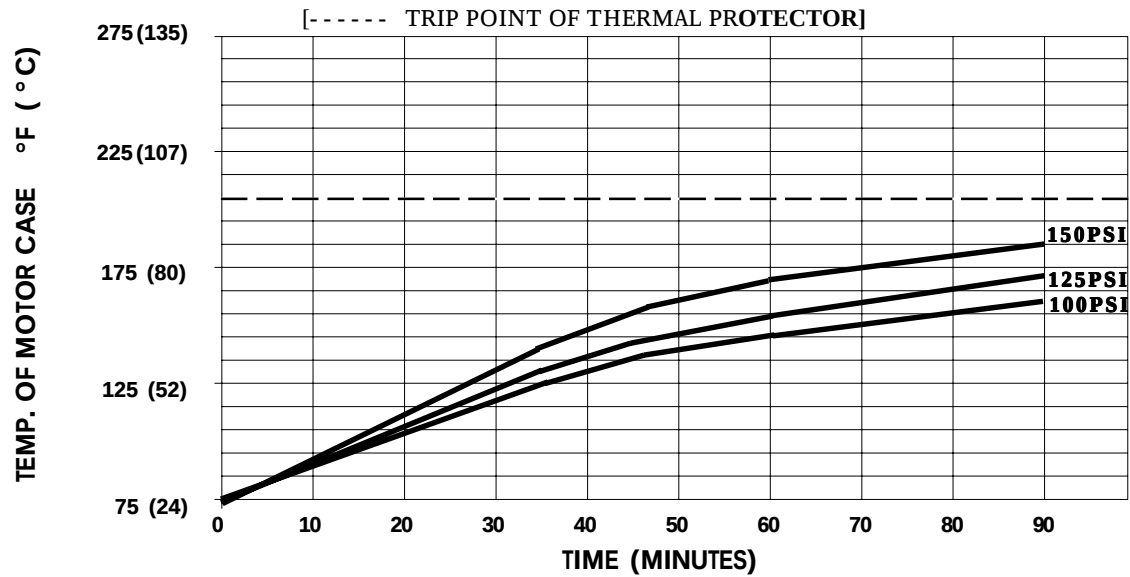

THIS GRAPH IS FOR USE AS A DESIGN GUIDE. IT IS BASED ON RUNNING CONTINUOUSLY WITH AN AMBIENT TEMPERATURE OF 75 ° F IN STILL AIR. THE THERMAL BREAKER WILL OPEN WHEN THE CASE TEMPERATURE REACHES 205 ° F.

TYPICAL PERFORMANCE

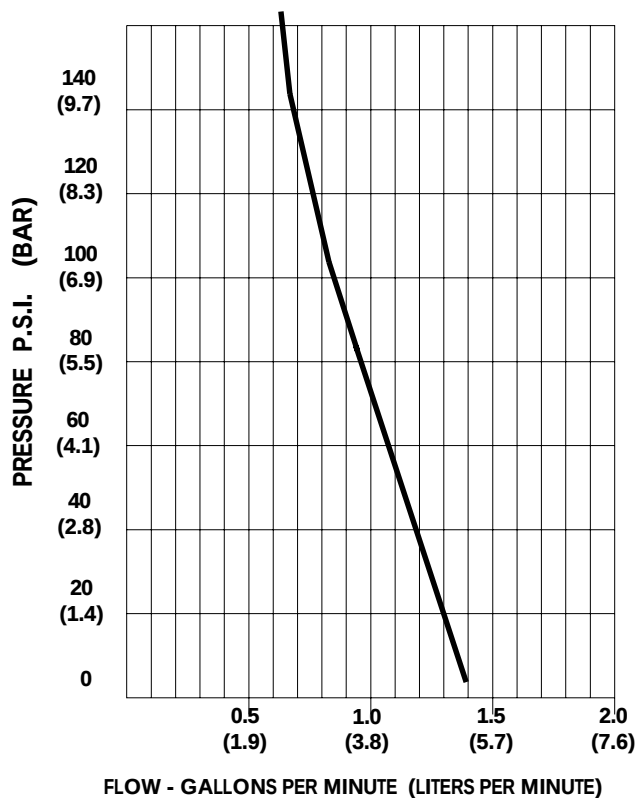

PRESSURE (PSI)	FLOW (GPM/LIT)	RPM MIN/MAX	CURRENT (AMPS)	VOLTAGE (VOLTS)
OPEN	1.40/5.3	1915/1925	0.30	115VAC
10	1.30/4.9	1875/1910	0.39	"
20	1.24/4.7	1820/1840	0.45	"
30	1.17/4.4	1785/1825	0.50	"
40	1.13/4.3	1730/1790	0.56	"
50	1.08/4.1	1675/1750	0.61	"
60	1.04/3.9	1660/1725	0.66	"
80	0.95/3.6	1590/1645	0.76	"
100	0.86/3.2	1525/1585	0.84	"
120	0.77/2.9	1475/1545	0.92	"
140	0.67/2.5	1440/1500	0.98	"
150	0.63/2.4	1420/1480	1.00	"

-SPECIFICATIONSSUBJECT TO CHANGE WITHOUT NOTICE.

-ALL DATA BASED ON TESTING WITH WATER AT AMBIENT TEMPERATURE.

For technical advice or service please take your pump into your local pump service center.
To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)