

Model 12ES15C-3P



Model 07ES05C-3P


AMT Solids Handling Centrifugal pumps are designed for continuous-duty OEM, Industrial/ Commercial and General Service applications including dirty water circulation, chemical processing, and liquid transfer.

Pumps are designed to handle liquids with solids content or dissolved solids and debris. Pull-from-rear design for easy service without disturbing any piping. Self-cleaning impellers to prevent clogging and handles solids up to 3/8" diameter depending on the model. Pumps are close coupled to Totally Enclosed Fan Cooled (TEFC) motors. **Pumps are not self-priming and require flooded suction.**

Centrifugal Chemical Pump

- **Cast Iron Construction**
- **EPDM/EPR Mechanical Seal and O-Rings**
- **Discharge Port Rotates in 45° Increments**
- **Solids Handling, Clog Resistant Impeller**
- **1/2 to 3 HP Dual Cycle 50/60 Hz TEFC 56J NEMA Single or Three Phase Motors**
- **3/4" to 2" NPT Sizes**
- **Maximum Working Pressure 125 PSI**
- **Maximum Flow 180 GPM**
- **Maximum Head 95 Ft. (41 PSI)**
- **Pull-From-Rear Design Permits Easy Servicing Without Disturbing Piping**
- **Multiple 1/2" NPT Drain Ports**

Performance of Straight Centrifugal End Suction Pumps

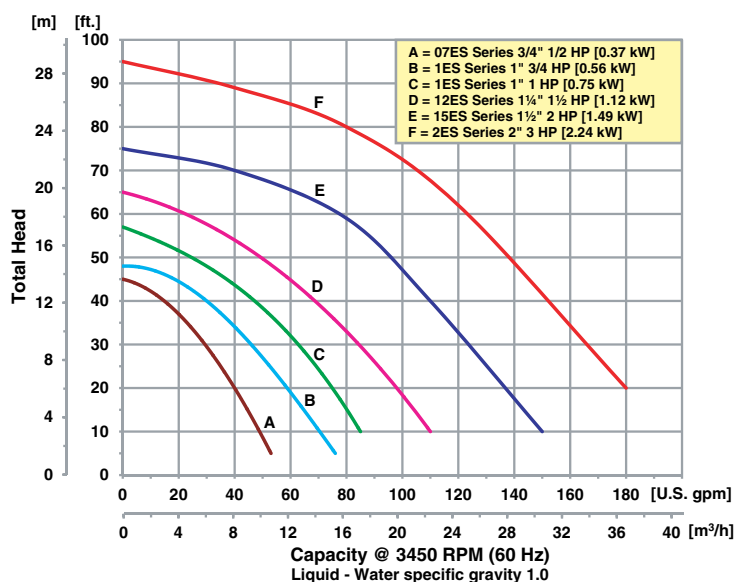

Pump Dimensional & Specification Data

Model	Curve	HP	PH	ENC	Voltage @ 60 Hz +	Full Load Amps	SUC*	DIS*	A**	B	C**	L**	W**	H	Ship Wt. (Lbs.)
07ES05C-1P 07ES05C-3P	A	1/2	1 3	TEFC	115-208/230 208-230/460	9/5 3/2	3/4	3/4	5.4 [13.8] 5.4 [13.8]	2.6 [6.7] 2.6 [6.7]	5.1 [12.9] N/A	13.9 [35.3] 13.2 [33.5]	10.1 [25.7] 10.1 [25.7]	9.9 [25.1] 9.5 [24.1]	47 43
1ES07C-1P 1ES07C-3P	B	3/4	1 3		115-208/230 208-230/460	9/5 3/2	1	1	5.4 [13.8] 5.4 [13.8]	2.6 [6.7] 2.6 [6.7]	5.1 [12.9] N/A	14.4 [36.5] 13.9 [35.3]	10.1 [25.7] 10.1 [25.7]	9.9 [25.1] 9.5 [24.1]	52 44
1ES10C-1P 1ES10C-3P	C	1	1 3		115-208/230 208-230/460	12/6 4/2	1	1	5.4 [13.8] 5.4 [13.8]	2.6 [6.7] 2.6 [6.7]	5.1 [12.9] N/A	14.6 [37.1] 13.2 [33.5]	10.1 [25.7] 10.1 [25.7]	9.9 [25.1] 9.5 [24.1]	53 52
12ES15C-1P 12ES15C-3P	D	1½	1 3		115-208/230 208-230/460	22/11 6/3	1¼	1¼	5.4 [13.8] 5.4 [13.8]	3.2 [8.3] 3.2 [8.3]	5.1 [12.9] N/A	15.6 [39.6] 15.4 [39.1]	10.3 [26.1] 10.3 [26.1]	9.9 [25.1] 9.8 [24.9]	64 54
15ES20C-1P 15ES20C-3P	E	2	1 3		115-208/230 208-230/460	28/14 7/4	1½	1½	5.4 [13.8] 5.4 [13.8]	3.2 [8.3] 3.2 [8.3]	5.0 [12.7] N/A	16.3 [41.4] 15.9 [40.4]	10.3 [26.1] 10.3 [26.1]	9.8 [24.9] 9.8 [24.9]	67 59
2ES30C-1P 2ES30C-3P	F	3	1 3		208/230 208-230/460	16 8/4	2	2	5.4 [13.8] 5.4 [13.8]	3.2 [8.3] 3.2 [8.3]	5.0 [12.7] N/A	16.8 [42.6] 16.4 [41.6]	10.3 [26.1] 10.3 [26.1]	9.8 [24.9] 9.8 [24.9]	75 63

(*) Standard NPT (Female) pipe thread.


(**) This dimension may vary due to motor manufacturer's specifications.

(+) 3-Phase motors can also operate on 50 Hz. (this will change full load amps, service factor and RPM)

NOTE: Dimensions are in inches (centimeters) and have a tolerance of $\pm 1/4"$.

NOTE: Electric supply for **ALL** motors must be within $\pm 10\%$ of nameplate voltage rating (e.g. 230V $\pm 10\%$ = 207 to 253)

Maximum Solids Handling Capacity: 3/8" Diameter

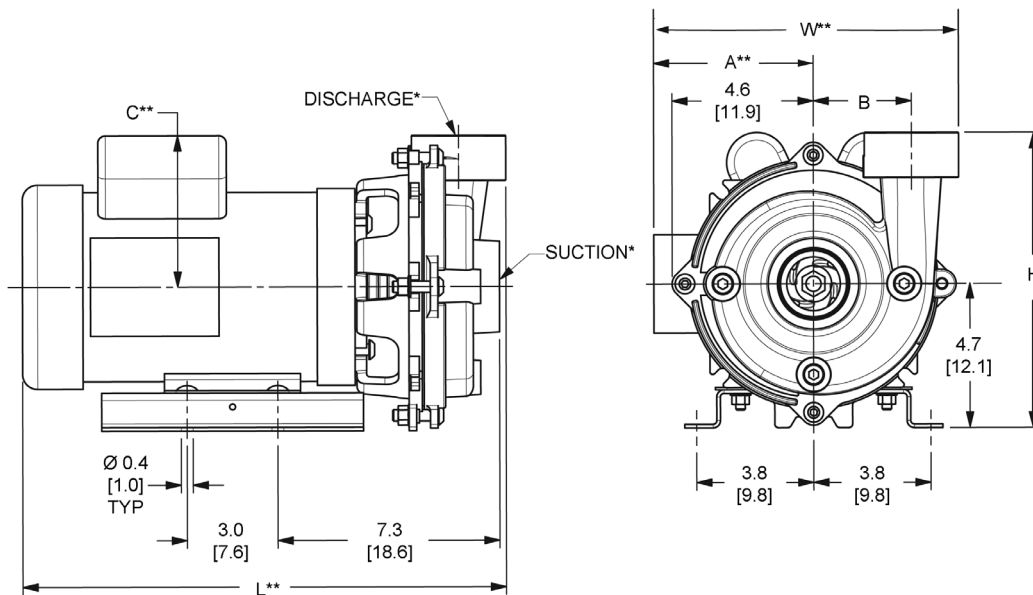

Standard Features

- Cast Iron Construction
- EPDM/EPR Mechanical Seal and O-rings
- 303 Stainless Steel Motor Shaft
- NEMA 56J TEFC Single or Three Phase Motors
- NEMA Dual Cycle 50/60 Hz Base Mounted Motor
- Self-cleaning Impeller
- Discharge Rotates in 45° Increments
- Maximum Working Pressure 125 PSI
- Maximum Temperature 180° F
- Front Drain Plugs
- QSP—Quick Ship Pump for Many Models
- Solids Handling Design

**Hazardous Duty/Xplosion Proof motors available from stock ranging from 1 to 10 HP;
CALL FOR QUOTATION & LEAD TIME!**