


Series: GA6-1½, GA6-2, GA7-1¼, GA7-1½

www.cranepumps.com Click here for Pricing/Ordering for Pumps and Parts


burks[®]
www.cranepumps.com

Close Coupled End Suction

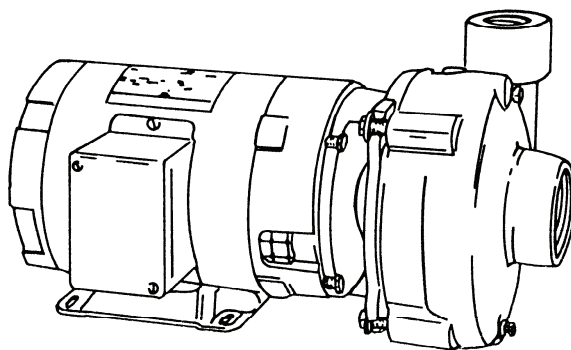


3500 RPM - 60Hz.

CAPACITIES TO 300 GPM (19 LPS)
HEADS TO 230 FEET (70 M)

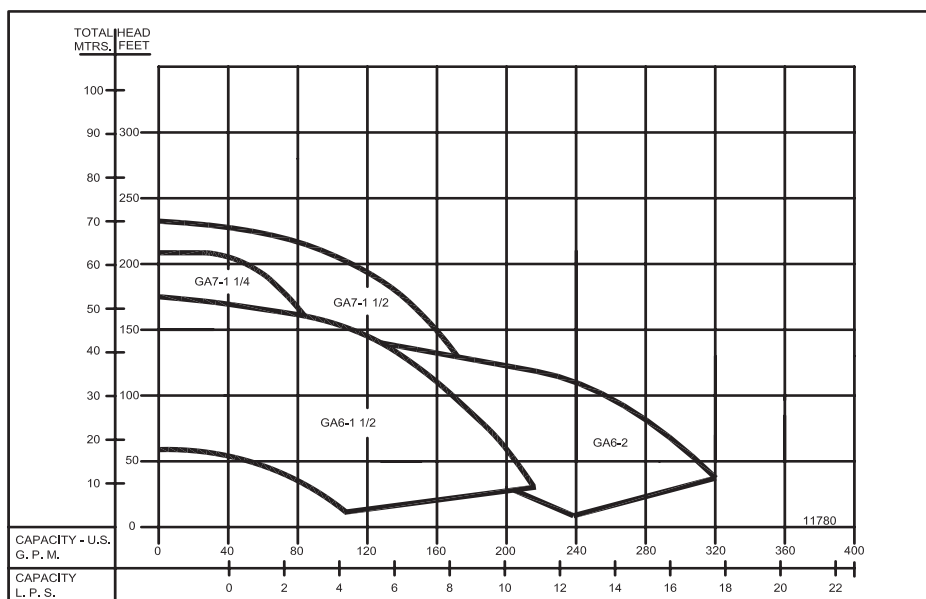

2900 RPM - 50Hz.

CAPACITIES TO 280 GPM (18 LPS)
HEADS TO 152 FEET (46.3 M)

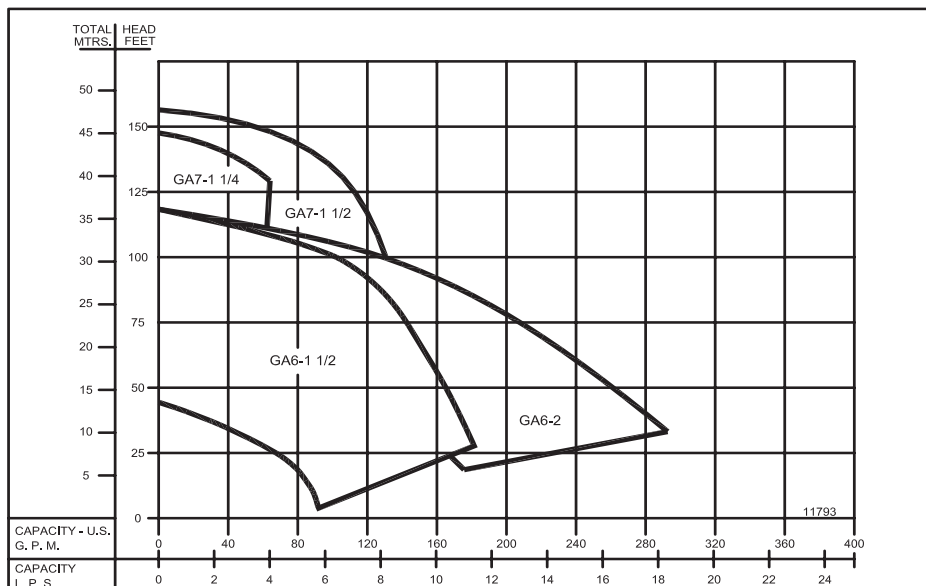

Individual performance curve should be checked for final selection.

Close Coupled End Suction

FOUR POSITION CASING

Discharge can be located in any of four positions. Casing is close grain iron of 30,000 psi minimum tensile strength. Back pull-out design eliminates the need to disturb piping should the pump ever require service - the casing stays in the line.

ENCLOSED BRONZE IMPELLER

Of the latest hydraulic design for maximum efficiency, impeller is balanced for vibration-free operation. It is precision fit to shaft with key drive and cap screw lock.

MECHANICAL SHAFT SEAL

Standard self-adjusting shaft seal for temperatures to 225°F (107°C) and pressures to 150 psi (1034kpa). Ceramic seat and carbon seal face for long trouble-free service. Special seals are available for higher temperatures and fluids other than water.

BRONZE SHAFT SLEEVE

Gasketed and keyed hook-type sleeve protects shaft from wear and corrosion in seal area.

MOTORS

JM Type motors have NEMA standard mounting flange, extended steel shaft and dual bearings. These motors offer the advantages of quiet operation, controlled shaft deflection for longer seal life, and bearings sized to provide good service life. All motors are supplied by manufacturers with national field service facilities.

FACTORY TESTED

After careful assembly and inspection, EVERY pump is factory tested and will meet Hydraulic Institute standards.

MAXIMUM OPERATING CONDITIONS

TEMPERATURE (For Standard Buna-N Seal)	225°F (107°C)
INLET PRESSURE	100 PSI (690kPa)
CASING WORKING PRESSURE	200 PSI (1379kPa)

MOTOR INFORMATION

60 Hz - 1750 RPM - ODP

60 Hz - 3500 RPM - ODP

Single Phase: 1 thru 2 Hp. - 115/230 V

3 & 7 1/2 Hp. - 230 V.

Three Phase: 1 thru 10 Hp. - 230/460 V

50 Hz - 2900 RPM - ODP

50 Hz - 1450 RPM - ODP

Single Phase: 110/220 Volt

Three Phase: 380 Volt

Voltages may differ from some suppliers. Consult factory.

Overload Protection: All motors must be installed with magnetic starter which provides full overload protection on all legs. Failure to use correct starter and overloads will void motor warranty.

GA6 Series pumps are not available with 7-1/2 HP Totally Enclosed or Explosion Proof motors.

MATERIALS OF CONSTRUCTION

PART	◆ ALL IRON	BRONZE FITTED	ALL BRONZE
Adapter	Cast Iron	Cast Iron	Bronze
Casing	Cast Iron	Cast Iron	Bronze
Impeller	Cast Iron	Bronze	Bronze
Shaft	Steel	Steel	Steel
Shaft Sleeve	#316 Stainless	Bronze	Bronze
Shaft Seal	Carbon-Ceramic SS - Buna-N	Carbon-Ceramic SS - Buna-N	Carbon-Ceramic SS - Buna-N

(◆) Does NOT include GA7-1½.



WARNING:

CANCER AND REPRODUCTIVE HARM -
WWW.P65WARNINGS.CA.GOV


Series: GA6-1½, GA6-2, GA7-1¼, GA7-1½

Dimensions

www.CranePumpAgency.com - Click here for Pricing/Ordering for Pumps and Parts

burks[®]
www.cranepumps.com


Close Coupled End Suction

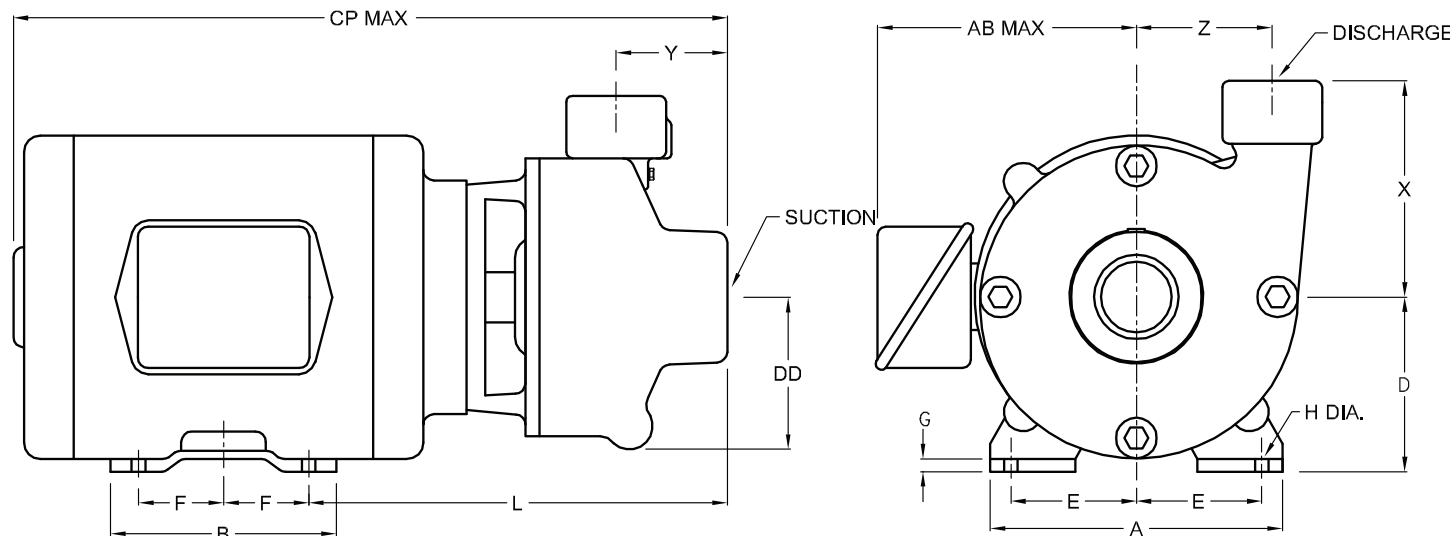

DIMENSIONS IN INCHES																			
MODEL		HP	MOTOR FRAME SIZE	DISC NPT (in)	SUCT NPT (in)	A	AB	B	CP	D	DD	E	F	G	H	L	X	Y	Z
1 Phase	3 Phase																		
104GA6-1½	3104GA6-1½	1	143JM	1½	2	7	8 ¹⁵ ₁₆	5	15 ¹³ ₁₆	4 ⁵ ₁₆	3½	2¾	2	¾	1 ¹ ₃₂	9 ⁵ ₈	4¾	2 ⁹ ₁₆	3 ¹³ ₁₆
15GA6-1½	315GA6-1½	1½	143JM			7	8 ¹⁵ ₁₆	5	15 ¹³ ₁₆	4 ⁵ ₁₆	3½	2¾	2	¾	1 ¹ ₃₂	9 ⁵ ₈	4¾	2 ⁹ ₁₆	3 ¹³ ₁₆
20GA6-1½	320GA6-1½	2	145JM			7	8 ¹⁵ ₁₆	6	16 ¹³ ₁₆	4 ⁵ ₁₆	3½	2¾	2½	¾	1 ¹ ₃₂	9 ⁵ ₈	4¾	2 ⁹ ₁₆	3 ¹³ ₁₆
30GA6-1½	330GA6-1½	3	145JM			7	8 ¹⁵ ₁₆	6	16 ¹³ ₁₆	4 ⁵ ₁₆	3½	2¾	2½	¾	1 ¹ ₃₂	9 ⁵ ₈	4¾	2 ⁹ ₁₆	3 ¹³ ₁₆
50GA6-1½	350GA6-1½	5	182JM			8¾	9 ⁷ ₈	5¾	17 ⁹ ₁₆	4 ⁵ ₁₆	4½	3¾	2¼	½	1 ³ ₃₂	10 ⁹ ₈	4¾	2 ⁹ ₁₆	3 ¹³ ₁₆
-----	375GA6-1½	7½	184JM			8¾	9 ⁷ ₈	6¾	18 ⁹ ₁₆	4 ⁵ ₁₆	4½	3¾	2¾	½	1 ³ ₃₂	10 ⁹ ₈	4¾	2 ⁹ ₁₆	3 ¹³ ₁₆
104GA6-2	3104GA6-2	1	143JM	2	2½	7	8 ¹⁵ ₁₆	5	16 ¹ ₁₆	4 ⁵ ₈	3½	2¾	2	¾	1 ¹ ₃₂	9 ⁷ ₈	5 ⁷ ₁₆	2¾	4
154GA6-2	3154GA6-2	1½	145JM			7	8 ¹⁵ ₁₆	6	17 ¹ ₁₆	4 ⁵ ₈	3½	2¾	2½	¾	1 ¹ ₃₂	9 ⁷ ₈	5 ⁷ ₁₆	2¾	4
30GA6-2	330GA6-2	3	145JM	2	2½	7	8 ¹⁵ ₁₆	6	17 ¹ ₁₆	4 ⁵ ₈	3½	2¾	2½	¾	1 ¹ ₃₂	9 ⁷ ₈	5 ⁷ ₁₆	2¾	4
50GA6-2	350GA6-2	5	182JM			8¾	9 ⁷ ₈	5¾	17 ¹³ ₁₆	4 ⁵ ₈	4½	3¾	2¼	½	1 ³ ₃₂	10 ⁹ ₈	5 ⁷ ₁₆	2¾	4
-----	375GA6-2	7½	184JM			8¾	9 ⁷ ₈	6¾	18 ¹³ ₁₆	4 ⁵ ₈	4½	3¾	2¾	½	1 ³ ₃₂	10 ⁹ ₈	5 ⁷ ₁₆	2¾	4
30GA7-1¼	330GA7-1¼	3	145JM	1¼	1½	7	8 ¹⁵ ₁₆	6	17 ¹ ₁₆	3½	4½	2¾	2½	¾	1 ¹ ₃₂	10¼	5 ⁸ ₈	3 ⁵ ₁₆	4 ¹ ₁₆
50GA7-1¼	350GA7-1¼	5	182JM			8¾	9 ⁷ ₈	5¾	18 ³ ₁₆	4½	4½	3¾	2¼	½	1 ³ ₃₂	11	5 ⁸ ₈	3 ⁵ ₁₆	4 ¹ ₁₆
-----	375GA7-1¼	7½	184JM			8¾	9 ⁷ ₈	6¾	19 ³ ₁₆	4½	4½	3¾	2¾	½	1 ³ ₃₂	11	5 ⁸ ₈	3 ⁵ ₁₆	4 ¹ ₁₆
104GA7-1½	3104GA7-1½	1	143JM	1½	2	7	8 ¹⁵ ₁₆	5	16½	3½	4 ⁹ ₁₆	2¾	2	¾	1 ¹ ₃₂	10 ⁵ ₁₆	6	3 ⁵ ₁₆	4¼
154GA7-1½	3154GA7-1½	1½	145JM			7	8 ¹⁵ ₁₆	6	17½	3½	4 ⁹ ₁₆	2¾	2½	¾	1 ¹ ₃₂	10 ⁵ ₁₆	6	3 ⁵ ₁₆	4¼
50GA7-1½	-----	5	184JM	1½	2	9	9 ⁷ ₈	6¾	19¼	4½	4 ⁹ ₁₆	3¾	2¾	½	1 ³ ₃₂	11 ¹ ₁₆	6	3 ⁵ ₁₆	4¼
-----	350GA7-1½	5	182JM			9	9 ⁷ ₈	5¾	18¼	4½	4 ⁹ ₁₆	3¾	2¼	½	1 ³ ₃₂	11 ¹ ₁₆	6	3 ⁵ ₁₆	4¼
75GA7-1½	-----	7½	213JM			10½	11 ¹ ₁₆	7¼	20¾	5¼	4 ⁹ ₁₆	4¼	2¾	5 ⁸ ₁₆	11 ¹⁵ ₁₆	6	3 ⁵ ₁₆	4¼	
-----	375GA7-1½	7½	184JM			9	9 ⁷ ₈	6¾	19¼	4½	4 ⁹ ₁₆	3¾	2¾	½	1 ³ ₃₂	11 ¹ ₁₆	6	3 ⁵ ₁₆	4¼
-----	3100GA7-1½	10	213JM			10½	11 ¹ ₁₆	7¼	20¾	5¼	4 ⁹ ₁₆	4¼	2¾	5 ⁸ ₁₆	11 ¹⁵ ₁₆	6	3 ⁵ ₁₆	4¼	

DIMENSIONS SHOWN ABOVE ARE APPROXIMATE MAXIMUM DIMENSIONS FOR STANDARD PUMPS EQUIPPED WITH ODP MOTORS.



Close Coupled End Suction

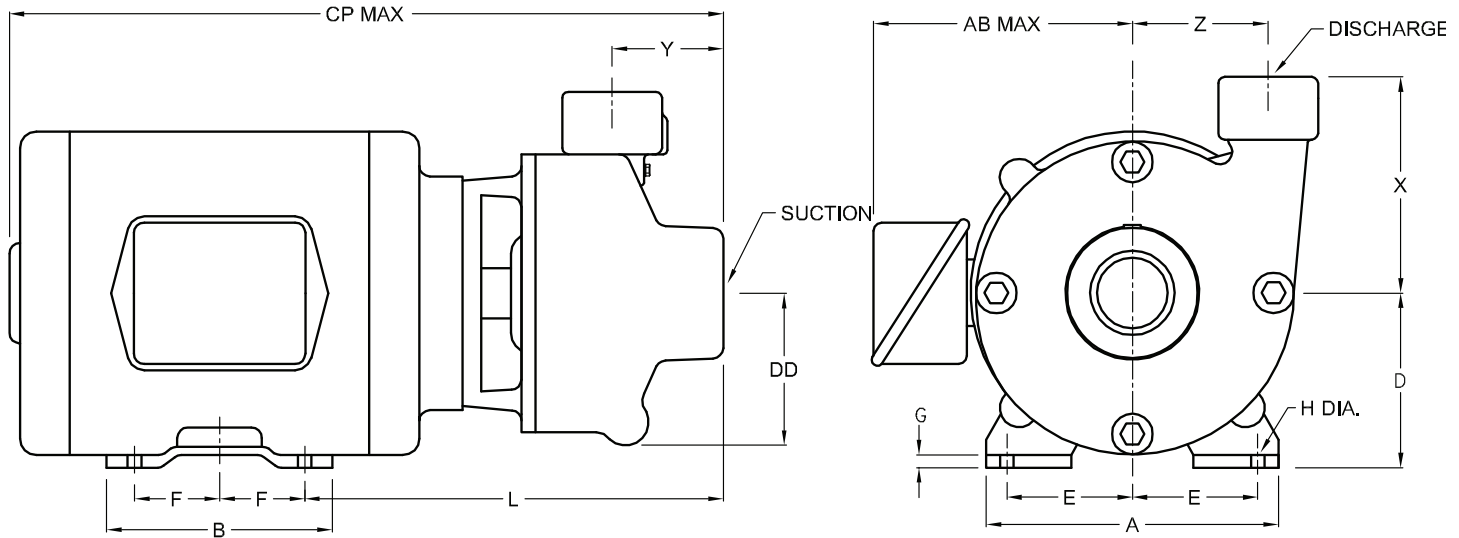

DIMENSIONS IN MILLIMETERS																			
MODEL		HP	MOTOR FRAME SIZE	DISC NPT (in)	SUCTION NPT (in)	A	AB	B	CP	D	DD	E	F	G	H	L	X	Y	Z
1 Phase	3 Phase																		
104GA6-1½	3104GA6-1½	1	143JM	1½	2	178	227	127	402	109	89	70	51	9.5	9	244	121	65	97
15GA6-1½	315GA6-1½	1½	143JM			178	227	127	402	109	89	70	51	9.5	9	244	121	65	97
20GA6-1½	320GA6-1½	2	145JM			178	227	152	427	109	89	70	64	9.5	9	244	121	65	97
30GA6-1½	330GA6-1½	3	145JM			178	227	152	427	109	89	70	64	9.5	9	244	121	65	97
50GA6-1½	350GA6-1½	5	182JM			222	251	146	446	109	114	95	57	13	10	263	121	65	97
-----	375GA6-1½	7½	184JM			222	251	171	471	109	114	95	70	13	10	263	121	65	97
104GA6-2	3104GA6-2	1	143JM	2	2½	178	227	127	408	117	89	70	51	9.5	9	251	138	70	102
154GA6-2	3154GA6-2	1½	145JM			178	227	152	433	117	89	70	64	9.5	9	251	138	70	102
30GA6-2	330GA6-2	3	145JM	2	2½	178	227	152	433	117	89	70	64	9.5	9	251	138	70	102
50GA6-2	350GA6-2	5	182JM			222	251	146	452	117	114	95	57	13	10	270	138	70	102
-----	375GA6-2	7½	184JM			222	251	171	478	117	114	95	70	13	10	270	138	70	102
30GA7-1¼	330GA7-1¼	3	145JM	1¼	1½	178	227	152	443	89	114	70	64	9.5	8.7	260	143	84	103
50GA7-1¼	350GA7-1¼	5	182JM			222	251	146	462	114	114	95	57	12.7	10.3	279	143	84	103
-----	375GA7-1¼	7½	184JM			222	251	172	487	114	114	95	70	12.7	10.3	279	143	84	103
104GA7-1½	3104GA7-1½	1	143JM	1½	2	178	227	127	419	89	116	70	51	9.5	8.7	262	152	84	108
154GA7-1½	3154GA7-1½	1½	145JM			178	227	152	445	89	116	70	64	9.5	8.7	262	152	84	108
50GA7-1½	-----	5	184JM	1½	2	229	251	171	489	114	116	95	70	13	10	281	152	84	108
-----	350GA7-1½	5	182JM			229	251	146	463	114	116	95	57	13	10	281	152	84	108
75GA7-1½	-----	7½	213JM			267	281	184	527	133	116	108	70	16	10	303	152	84	108
-----	375GA7-1½	7½	184JM			229	251	171	489	114	116	95	70	13	10	281	152	84	108
-----	3100GA7-1½	10	213JM			267	281	184	527	133	116	108	70	16	10	303	152	84	108


DIMENSIONS SHOWN ABOVE ARE APPROXIMATE MAXIMUM DIMENSIONS FOR STANDARD PUMPS EQUIPPED WITH ODP MOTORS.

Close Coupled End Suction

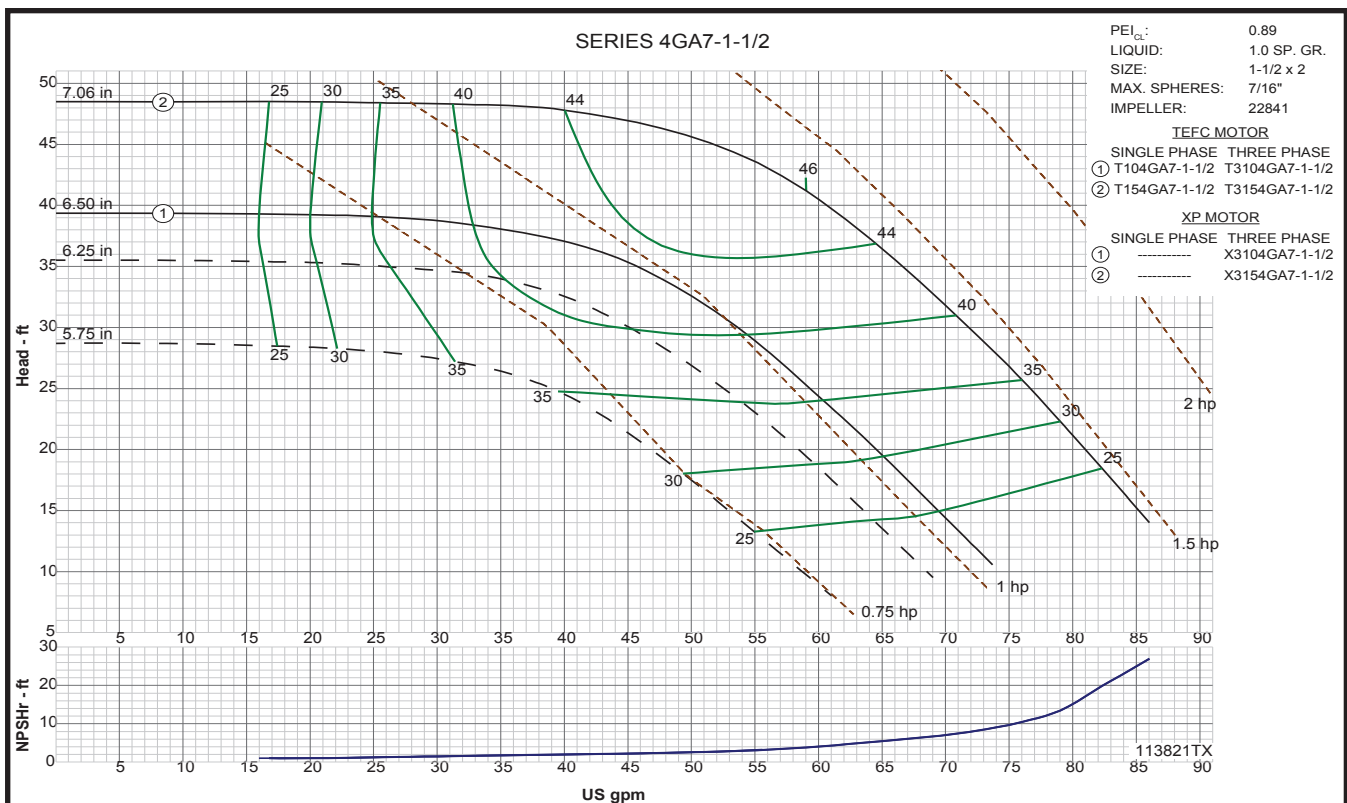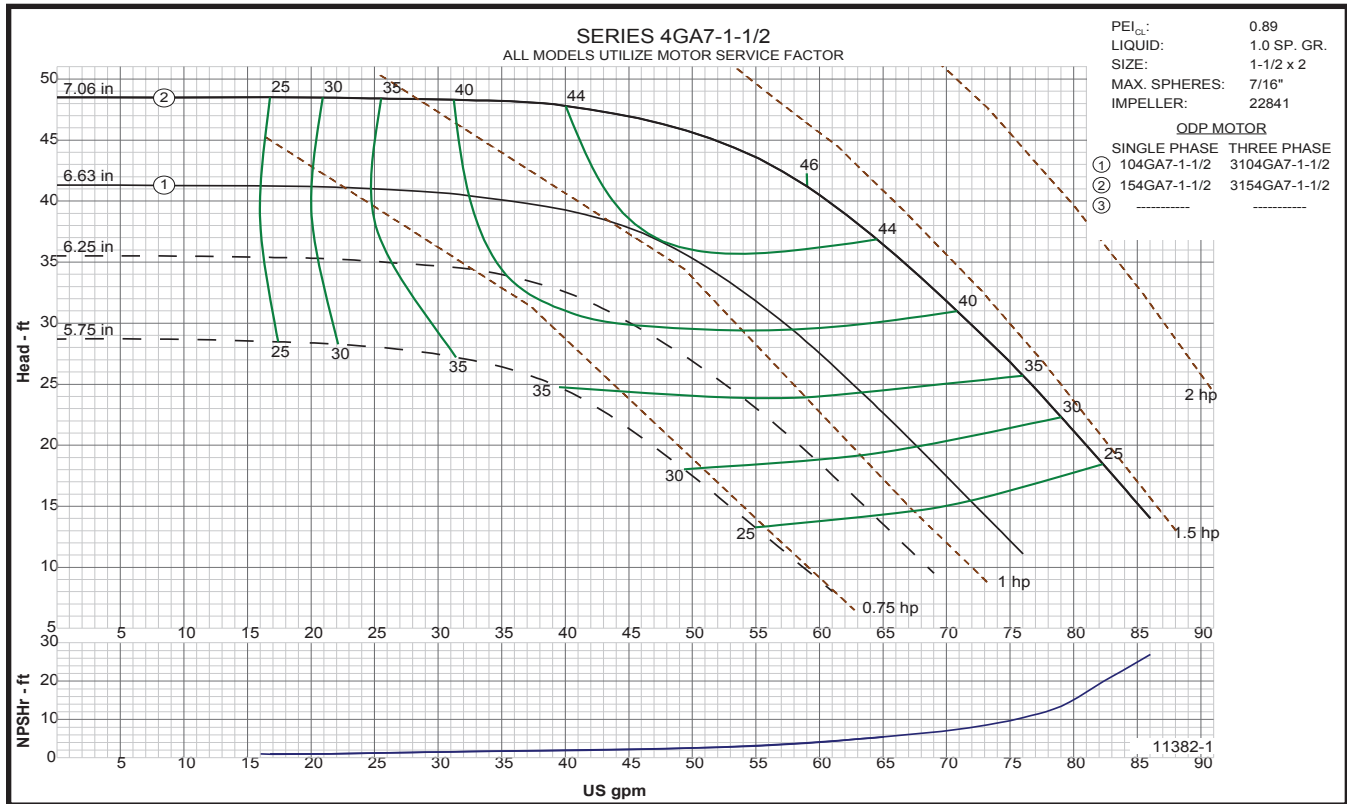


Close Coupled End Suction


3500
RPM

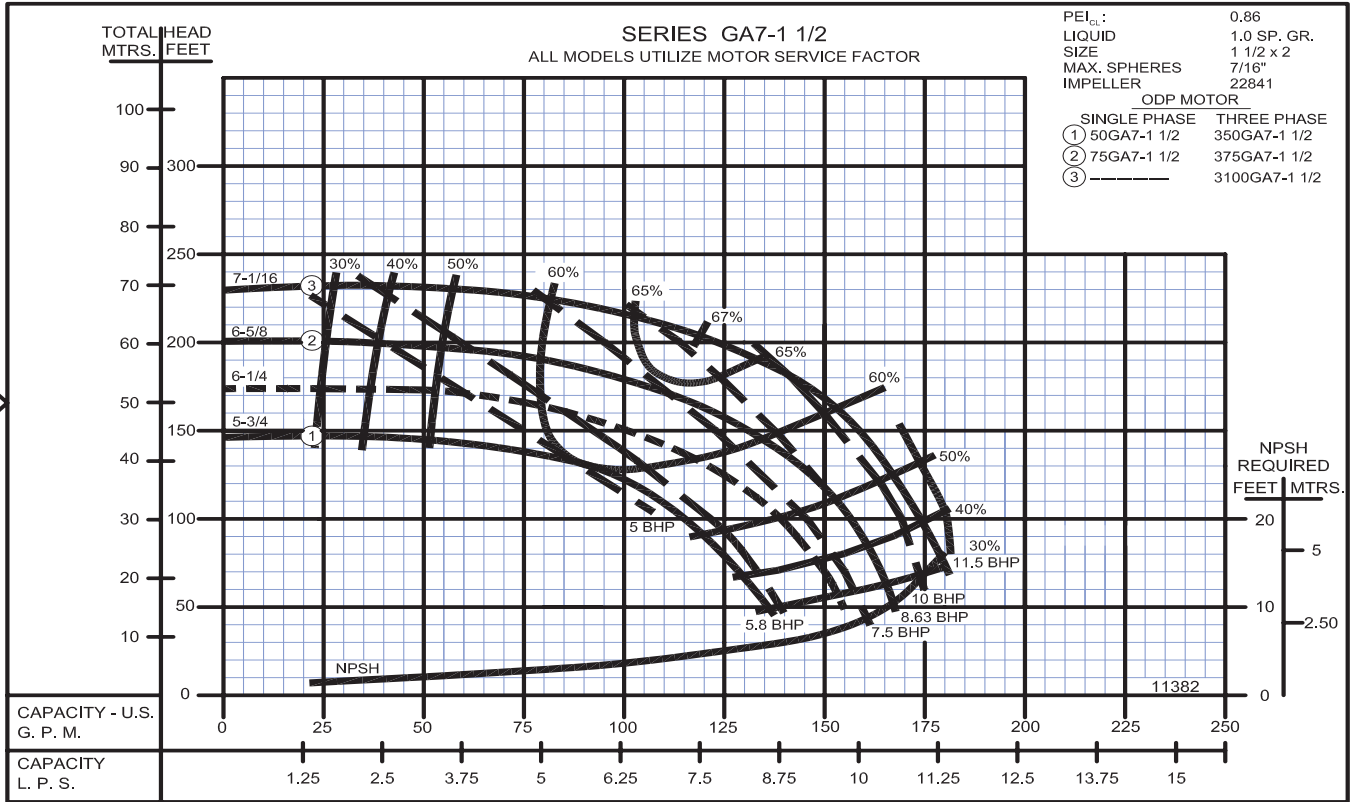

3500
RPM

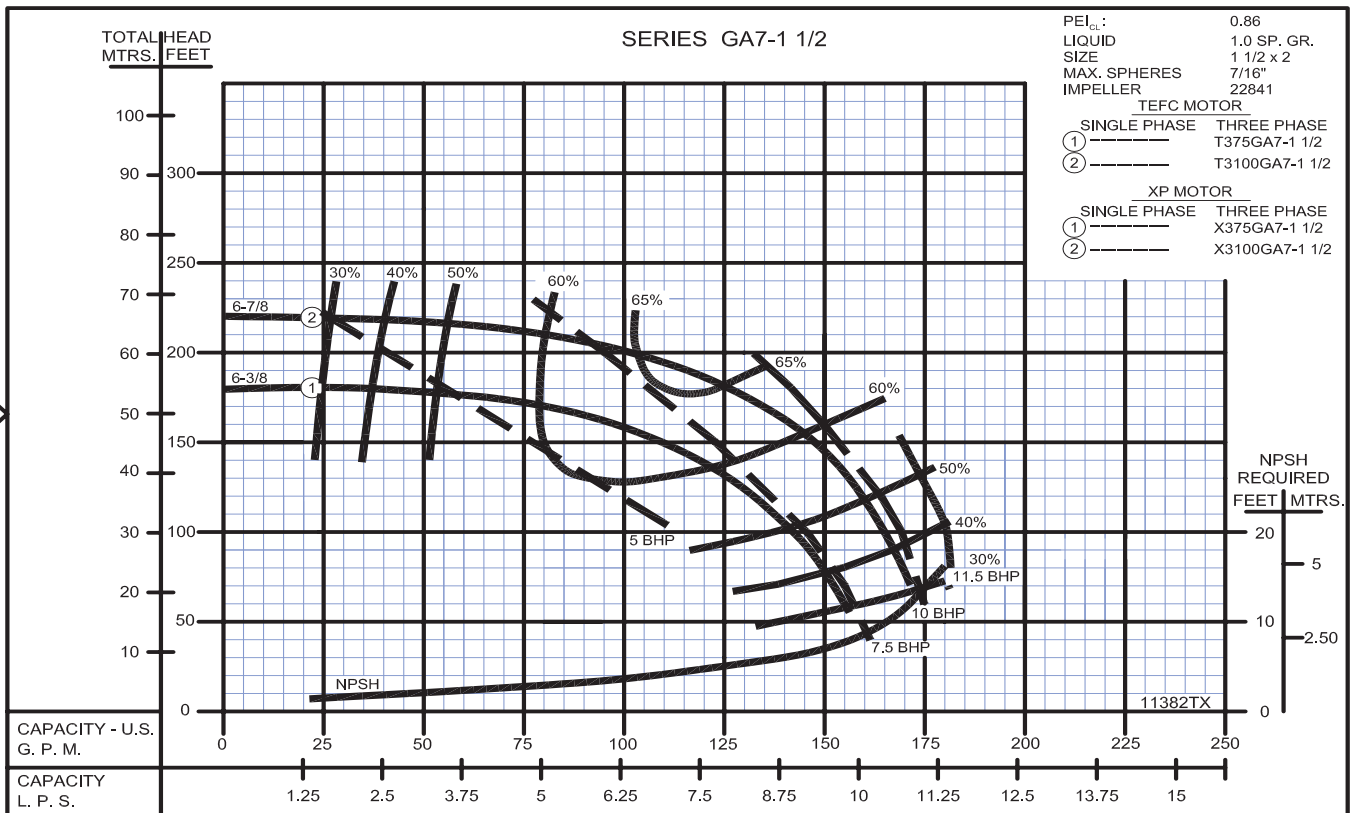

Centrifugals - Close Coupled

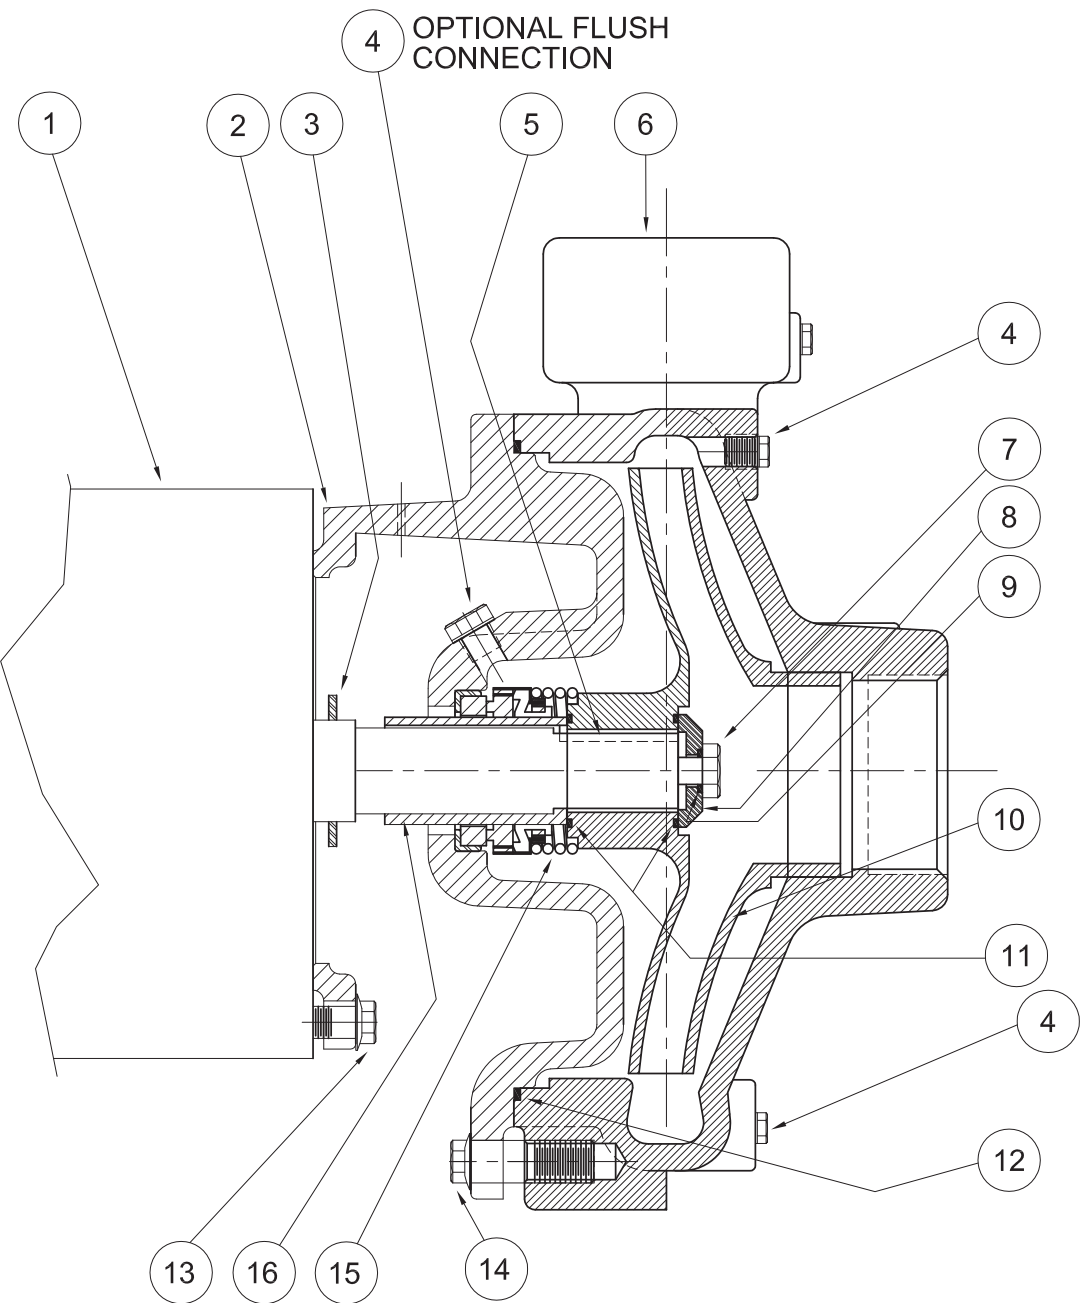

1 - MOTORS			
RPM & PHASE	PART NUMBER	HP	FRAME SIZE
OPEN DRIP PROOF			
1750 RPM Single Phase (ODP)	21393 21394	1 1½	143JM 145JM
1750 RPM Three Phase (ODP)	21419 21420	1 1½	143JM 145JM
3500 RPM Single Phase (ODP)	09902 21850	5 7½	184JM 213JM
3500 RPM Three Phase (ODP)	09906 09907 09999	5 7½ 10	182JM 184JM 213JM
TOTALLY ENCLOSED			
1750 RPM Single Phase (TEFC)	21399 21400	1 1½	143JM 145JM
1750 RPM Three Phase (TEFC)	21426 21427	1 1½	143JM 145JM
3500 RPM Single Phase (TEFC)	22283 23442	5 7½	213JM 215JM
3500 RPM Three Phase (TEFC)	09950 09951 20000	5 7½ 10	184JM 213JM 215JM
EXPLOSION PROOF			
1750 RPM Three Phase (XP)	21433 21434	1 1½	143JM 145JM
3500 RPM Three Phase (XP)	09954 09955 20001	5 7½ 10	184JM 213JM 215JM

SYMBOL NUMBER	PART NUMBER	QTY	DESCRIPTION
13	21236	4	Cap Screw - 143-184JM Motors
14	22803	4	Cap Screw - 213-215JM Motors
	22803	4	Cap Screw
15	09917	1	Mechanical Seal - Buna-N (Std)
	09926	1	Mechanical Seal - Viton
	21271	1	Mechanical Seal - EPDM**
16	22063-C	1	Shaft Sleeve - Bronze
DIFFERING PARTS FOR ALL BRONZE CONSTRUCTION			
2	22294-A	1	Adapter - Bronze - 143-184JM Motors
	22845-A	1	Adapter - Bronze - 213-215JM Motors
4	01691-A	3	Pipe Plug 1/8" Bronze
6	22842-A	1	Casing - Bronze
7	03289	1	Cap Screw - Bronze
DIFFERING PARTS FOR ALL IRON CONSTRUCTION			
2	00158	3	Pipe Plug 1/8" Steel
8	22105-A	1	Washer - Steel
10	Not Available	1	Impeller
16	22063-A	1	Shaft Sleeve - SS

(**) For hot water or Caustic service.

SYMBOL NUMBER	PART NUMBER	QTY	DESCRIPTION
2	22294	1	Adapter - 143-184JM Motors
	22845	1	Adapter - 213-215JM Motors
3	09918	1	Slinger Washer
4	00158	2	Pipe Plug - 1/8" Steel, Zinc Plated
5	23014	1	Key
6	22842	1	Casing
7	1-529-1	1	Cap Screw - SS
8	22105-C	1	Washer - Bronze
9	22080	1	O-Ring Gasket - Buna-N (Std)
	2-31005-012	1	O-Ring Gasket - Viton
	22093	1	O-Ring Gasket - EPDM**
10	1750 RPM		
	22841-6.63	1	Impeller - 104GA7-1-1/2 & 3104GA7-1-1/2
	22841-7.06	1	Impeller - 154GA7-1-1/2 & 3154GA7-1-1/2
	3500 RPM		
	22841-5.75	1	Impeller - 50GA7-1-1/2 & 350GA7-1-1/2
	22841-6.63	1	Impeller - 75GA7-1-1/2 & 375GA7-1-1/2
	22841-7.06	1	Impeller - 3100GA7-1-1/2
11	22083	2	O-Ring Gasket - Buna-N (Std)
	22084	2	O-Ring Gasket - Viton
	22094	2	O-Ring Gasket - EPDM**
12	22321	1	O-Ring Gasket - Buna-N (Std)
	22322	1	O-Ring Gasket - Viton
	22324	1	O-Ring Gasket - EPDM**



WARNING:

CANCER AND REPRODUCTIVE HARM -
WWW.P65WARNINGS.CA.GOV

CRANE

PUMPS & SYSTEMS

SECTION CCCP
PAGE 13
DATE 11/18