


DATA SHEET

5 FRAME PISTON PUMPS



Brass Models: 323, 390

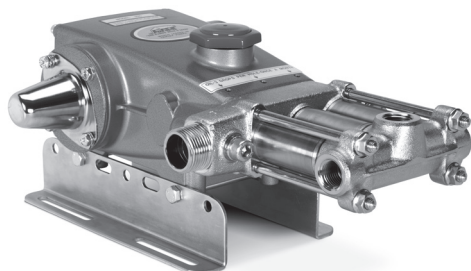

Model 390 Shown
(Shaft protector and mounting rails sold separately)

FEATURES

- Triplex Uniflow design provides continuous forward liquid, promoting smooth operation.
- Wetted cups and floating pistons are lubricated and cooled by pumped liquids, promoting longer cup life.
- Mechanically-actuated inlet valves create strong lift and easier prime.
- Pump comes standard with NBR seals. Alternative seal materials are available for higher temperature or chemical compatibility.

COMMON SPECIFICATIONS

	U.S.	Metric
Crankcase Capacity	21 oz	0.62 l
Discharge Ports (3)	½" NPT(F)	½" NPT(F)
Pulley Mounting	Either Side	Either Side
Shaft Diameter	0.787"	20 mm

SPECIFICATIONS

U.S. Measure

Metric Measure

Models 323

Flow	5.0 gpm	19 lpm
Pressure Range	100–1500 psi	6.9–103 bar
Inlet Pressure Range	-8.5 to 40 psi	-0.6 to 2.8 bar
Max. Liquid Temperature (NBR)	160° F	71° C

Alternative seals available for higher temperatures up to 180° F

Pump RPM*	1000 rpm	1000 rpm
Bore	0.866"	22 mm
Stroke	0.669"	17 mm
Inlet Port (1)	½" NPT(F)	½" NPT(F)
Auxiliary Port (1)	¼" NPT(F)	¼" NPT(F)
Weight	16.6 lbs	7.5 kg
Dimensions	12.4 x 10.0 x 5.28"	315 x 254 x 134 mm

Models 390

Flow	12.0 gpm	45.4 lpm
Pressure Range	100–600 psi	6.9–41 bar
Inlet Pressure Range (up to 8 gpm)	-8.5 to 40 psi	-0.6 to 2.8 bar
Inlet Pressure Range (8 to 12 gpm)	Flooded to 40 psi	Flooded to 2.8 bar
Max. Liquid Temperature (NBR)	140° F	60° C

Alternative seals available for higher temperatures up to 180° F

Pump RPM*	1200 rpm	1200 rpm
Bore	1.260"	32 mm
Stroke	0.629"	16 mm
Inlet Port (1)	1" NPT(M)	1" NPT(M)
Weight	18.8 lbs	8.5 kg
Dimensions	14.3 x 10.0 x 5.28"	363 x 254 x 134 mm

*Pump minimum is 100 rpm

ALTERNATIVE SEAL CONFIGURATION

MATERIAL	SUFFIX CODE	MAXIMUM TEMPERATURE
NBR	—	160° F (71° C)
FPM	.0110	180° F (82° C)
HT	.3000	180° F (82° C)

See **Tech Bulletin 002** for inlet conditions and RPM at high-temperature.

DETERMINING THE PUMP RPM

DETERMINING THE REQUIRED HP

DETERMINING MOTOR PULLEY SIZE

$$\frac{\text{Rated gpm}}{\text{Rated rpm}} = \frac{\text{Desired gpm}}{\text{Desired rpm}}$$

$$\frac{\text{hp}}{(\text{Electric Brake})} = \frac{\text{gpm} \times \text{psi}}{1460}$$

$$\frac{\text{Motor Pulley OD}}{\text{Pump rpm}} = \frac{\text{Pump Pulley OD}}{\text{Motor rpm}}$$

Refer to pump **Service Manual** for repair procedure and additional technical information.

PARTS LIST

ITEM	PART NUMBER			DESCRIPTION		QTY
	323	MATL	390	MATL		
5	125824	STCP R	125824	STCP R	Screw, HHC Sems (M6 x 16) (See Tech Bulletin 074)	8
8	43344	AL	43344	AL	Cover, Bearing	2
10	43343	NBR	43343	NBR	O-Ring, Bearing Cover	2
11	43222	NBR	43222	NBR	Seal, Oil	2
15	14480	STL R	14480	STL R	Bearing, Ball	2
20	45883	HS	45883	HS	Assembly, Connecting Rod (See Tech Bulletin 074)	3
25	43342	FCM	43342	FCM	Crankshaft, Dual-End	1
32	43211	ABS	43211	ABS	Cap, Oil Filler	1
33	14177	NBR	14177	NBR	O-Ring, Oil Filler Cap	1
37	92241	PC	92241	PC	Gauge, Oil Bubble with Gasket (See Tech Bulletin 074)	1
38	44428	NBR	44428	NBR	Gasket, Flat, Oil Gauge	1
40	126541	STCP R	126541	STCP R	Screw, HHC Sems (M6 x 20) (See Tech Bulletin 074)	4
48	25625	STCP	25625	STCP	Plug, Drain (¼" x 19 BSP)	1
49	23170	NBR	23170	NBR	O-Ring, Drain Plug	1
50	48772	AL	48772	AL	Cover, Rear (See Tech Bulletin 090)	1
51	48773	NBR	48773	NBR	O-Ring, Cover (See Tech Bulletin 090)	1
53	48769	AL	48769	AL	Crankcase (See Tech Bulletin 090)	1
54	126231	STCP R	126231	STCP R	Lockwasher (M10)	2
55	126531	STCP R	126516	STCP R	Screw (323: M10 x 30) (390: M10 x 50)	2
56	43355	POP	43355	POP	Pan, Oil	1
64	43351	CM	43351	CM	Pin, Crosshead	3
65	43775	SZZ	44312	SZZ	Rod, Piston	3
70	43527	NBR	43527	NBR	Seal, Oil	3
75	25327	S	25327	S	Slinger, Barrier	3
77	25392	NBR	25392	NBR	O-Ring, Sleeve	6/3
80	25299	SCP	44311	SCP	Sleeve	3
	28460	S	—	—	<i>Sleeve (Unchromed) (323)</i>	3
81	29003	PTFE	—	—	Backup Ring, Sleeve	3/0
100	43530	PVDF	43530	PVDF	Retainer, Seal	3
101	43532	—	43532	—	Wick, Long Tab	3
106	25153	NBR	—	—	Seal, Low-Pressure, Blue Dot	3
	—	—	100015	FPM	Seal, Low-Pressure, (Ungreased)	3
110	43767	BBCP	44286	BBCP	Manifold, Inlet (323: Bottom Port) (390: Side Port)	1
112	—	—	43781	NBR	O-Ring, Adapter, Inner	0/3
113	—	—	11261	FBR	Spacer, Cylinder (Center Only)	0/1
114	—	—	44287	BB	Adapter, Inlet	0/3
116	—	—	27536	NBR	O-Ring, Inlet Adapter, Outer	0/6
119	43533	S	27944	S	Valve, Inlet	3
130	—	—	27945	S	Piston	3
133	129579	NBR	27946	FPM	Cup, Piston (323: Machined)	3
135	27983	S	27796	S	Spacer, Piston	3
136	29588	S	27947	S	Retainer, Piston	3
137	27006	S	15850	S	Washer	3
138	27000	S	26546	S	Nut, Slotted	3
139	14158	S	14158	S	Cotterpin (M1.6 x 10)	3
143	43781	NBR	—	—	O-Ring, Cylinder	3
150	43768	SCP	44288	SCP	Cylinder	3
	43835	S	—	—	<i>Cylinder (Unchromed) (323)</i>	3
153	21986	PTFE	—	—	Backup Ring, Cylinder	3
155	—	—	27536	NBR	O-Ring, Adapter, Inner	0/3
157	—	—	44310	BB	Adapter, Discharge	0/3
159	43781	NBR	43781	NBR	O-Ring (323: Cylinder) (390: Adapter)	3
163	43793	NBR	43793	NBR	O-Ring, Seat	3
164	43779	S	103956	S	Seat	3
166	43721	S	104302	S	Valve	3
167	43251	S	43251	S	Spring	3
168	43780	S	103957	S	Retainer, Spring	3
185	43770	BBCP	43770	BBCP	Manifold, Discharge	1
187	126782	STCP R	126551	STCP R	Stud, Discharge Manifold (323: M8 x 100) (390: M8 x 110)	4
194	126201	STCP R	126201	STCP R	Nut, Hex Flange (See Tech Bulletin 074)	4

Bold print part numbers are unique to a particular pump model. Italics are optional items.


R Components comply with RoHS Directive. For additional technical information see www.catpumps.com/literature/tech-bulletins.

MATERIAL CODES (Not Part of Part Number): ABS=ABS Plastic AL=Aluminum BB=Brass BBCP=Brass/Chrome Plated CM=Chrome-Moly FBR=Fiber

FCM=Forged Chrome-moly FPM=Fluorocarbon HS=High Strength NBR=Medium Nitrile (Buna-N) NY=Nylon PC=Poly Carbonate POP=Polypropylene PTFE=Pure Polytetrafluoroethylene

PVDF=Polyvinylidene Fluoride S=304SS SCP=304SS/Chrome Plated SNG=Special Blend (Buna) STL=Steel STCP=Steel/Chrome Plated STZP=Steel/Zinc Plated SZZ=304SS/Zamak

EXPLODED VIEW

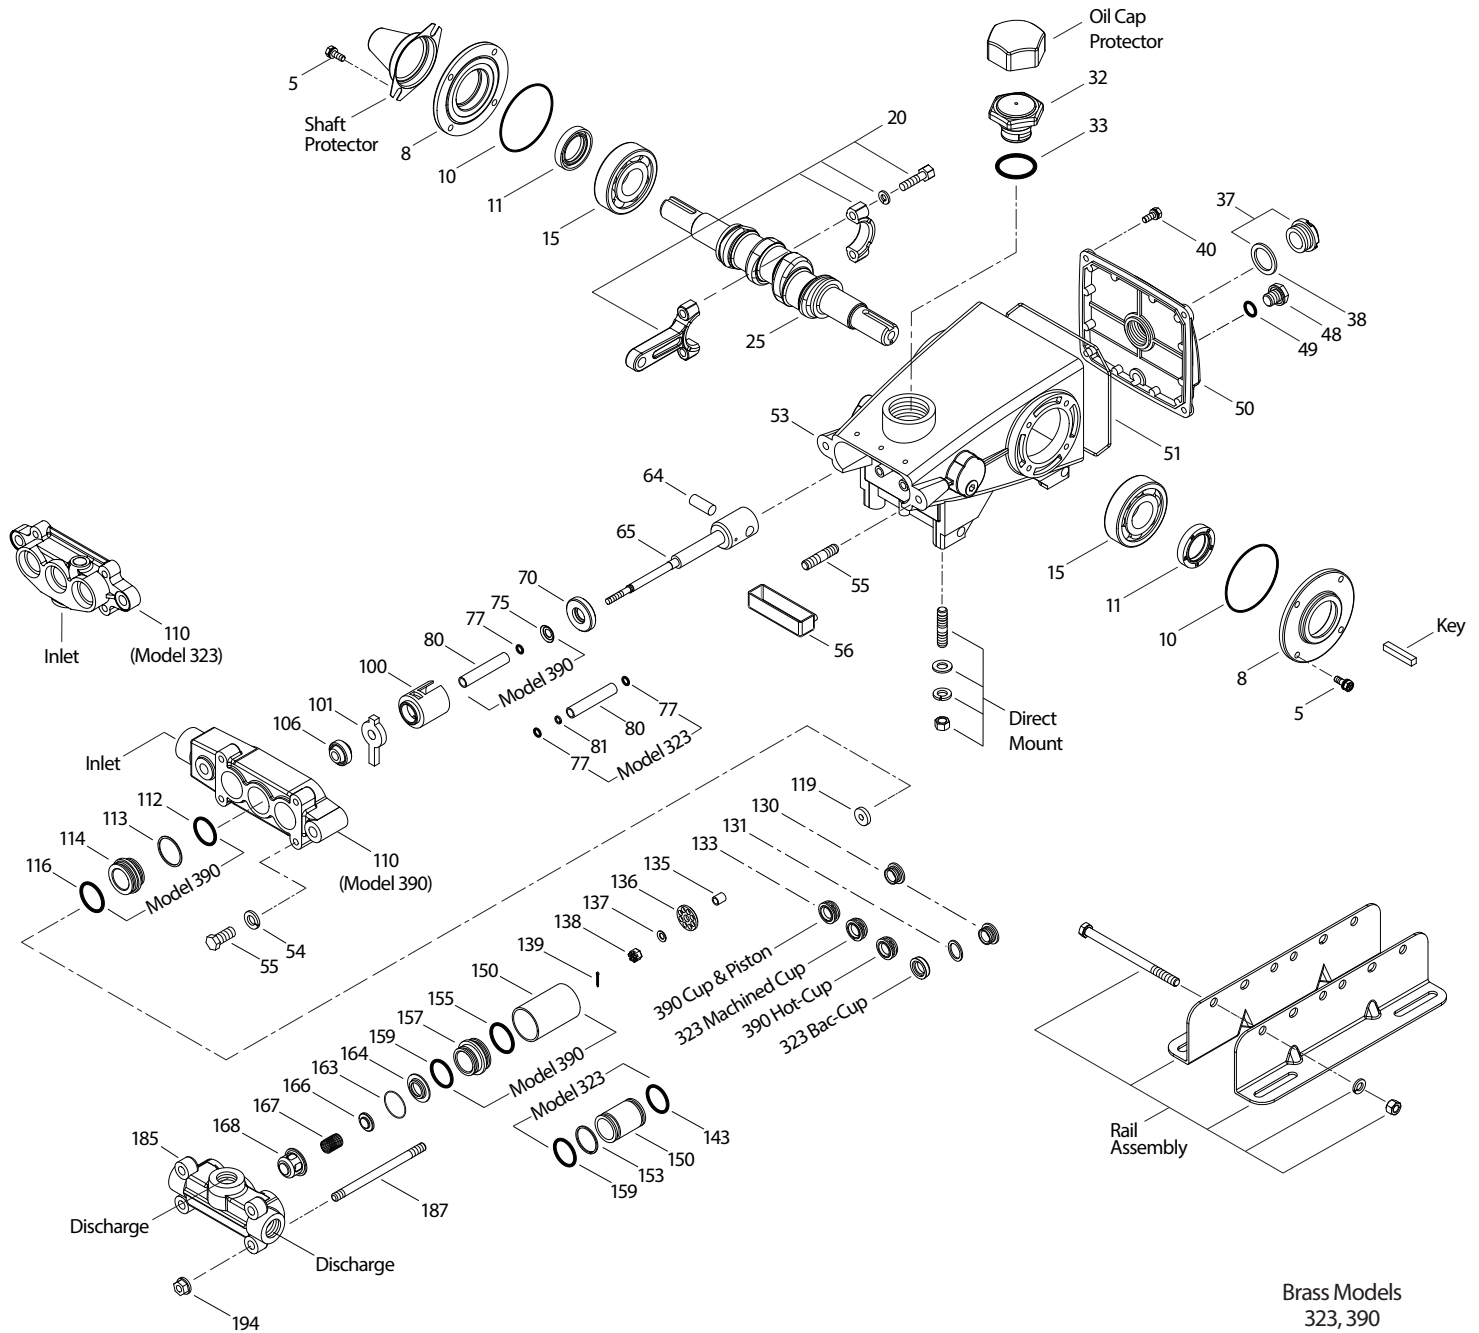

Brass Models
323, 390
January 2025

OPTIONAL PARTS AND ACCESSORIES

PART	DESCRIPTION	QTY
30057	Key (M6 x 6 x 25)	1
30611	Assembly, Rail	1
30241	Assembly, Box Rail (Not Shown)	1
30243	Mount, Direct	1
828710	Protector, Oil Cap	1
118672	Protector, Shaft	1
34334	Kit, Oil Drain (3/8" x 24") Not Shown	1
30633	Pulley (30058) and Key (30057) Assembly	1
30944	Hub (30945) and Key (30057) Assembly	1

SERVICE PARTS

PART	DESCRIPTION	QTY
34011	Kit, Seal – Blue Dot (Model 323)	1
31825	Kit, Seal – FPM (Model 390)	1
30859	Kit, Valve (Quiet) – NBR (Model 323)	1
34010	Kit, Valve (Flat) – NBR (Model 390)	1
6107	Oil, Bottle (21 oz) ISO 68 Hydraulic (Fill to Specified Crankcase Capacity Prior to Start-up)	1
6124	Gasket, Liquid (3 oz)	1

SEAL KITS One (1) seal kit required per pump

PUMP MODELS	Blue Dot	NBR	FPM
323	34011	30305	
390		30305	31825
ITEM (Included in Seal Kits)			
			DESCRIPTION
77	—	—	28771 O-Ring, Sleeve
101	43532	—	43532 Wick
106	25153*	30315**	100015*** Seal, Low-Pressure
139	14158	14158	14158 Cotterpin
			3

*Ungreased, No Garter Spring

**Use PN 30325 for FPM (Greased)

***Ungreased

SLEEVE AND SEAL KIT One (1) sleeve and seal kit required per pump

PUMP MODELS	NBR	NBR
323	30312	
390		31824
ITEM (Included in Sleeve and Seal Kits)		
		DESCRIPTION
75	25327	25327 Slinger, Barrier
77	25392*	25392* O-Ring, Sleeve
80	25299	44311 Sleeve
101	—	43532 Wick
106	30315**	100015*** Seal, Low-Pressure
139	14158	14158 Cotterpin
		3

*Use PN 28771 for FPM

**Use PN 30325 for FPM (Greased)

***Ungreased

CUP KITS One (1) cup kit required per pump

PUMP MODELS	323	323	390	390
	NBR (STD)	NBR (BAC)	FPM (.0110)	NBR (HOT)
	30993	30858	31822	32390
ITEM (Included in Cup Kits)				
				DESCRIPTION
133	129579	43792*	27946	29093 Cup
139	14158	14158	14158	14158 Cotterpin
143	43781**	43781**	43781**	43781** O-Ring, Cylinder
155	—	—	27536	27536 O-Ring, Discharge Adapter
355	—	43548	27964	— Inserter, Cup
				1

**Use PN 43789 for BAC-CUP

**Use PN 11337 for FPM

PISTON KITS One (1) piston kit required per pump

PUMP MODELS	323	323	390
	NBR (STD)	NBR (BAC)	NBR (STD)
	30992	30857	31823
ITEM (Included in Piston Kits)			
			DESCRIPTION
112	—	—	43781* O-Ring, Inlet Adapter
116	—	—	27536** O-Ring, Inlet Adapter
119	43533	43533	27944 Valve, Inlet
130	—	43787	27945 Piston
131	—	43788	— BAC-Cup Ring
133	129579	43792	27946 Cup
135	27983	27983	27796 Spacer, Piston
136	29588	29588	27947 Retainer, Piston
137	27006	27006	15850 Washer
138	27000	27000	26546 Nut, Slotted
139	14158	14158	14158 Cotterpin
143	43781*	43781*	— O-Ring, Cylinder
153	21986	21986	— Backup Ring, Cylinder
155	—	—	27536** O-Ring, Discharge Adapter
159	43781*	43781*	43781* O-Ring, Cylinder Adapter
355	—	—	27964 Inserter, Cup
			1

*Use PN 11377 for FPM

**Use PN 43174 for FPM



VALVE KITS One (1) valve kit required per pump

PUMP MODELS	NBR (QUIET)	NBR (FLAT)
323, 390	30859	34010
ITEM (Included in Valve Kits)		
		DESCRIPTION
155	—	27536* O-Ring, Discharge Adapter
159	—	43781** O-Ring, Cylinder, Adapter
163	43793***	43793*** O-Ring, Seat
164	43779	103956 Seat
166	43721	104302 Valve
167	43251	43251 Spring
168	43780	103957 Retainer, Spring
		3

*Use PN 43174 for FPM

**Use PN 11337 for FPM

***Use PN 43791 for FPM

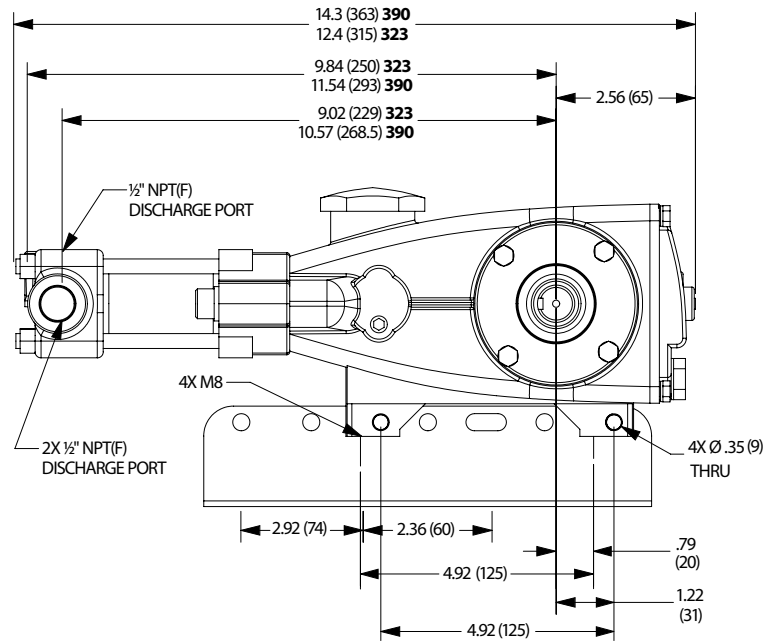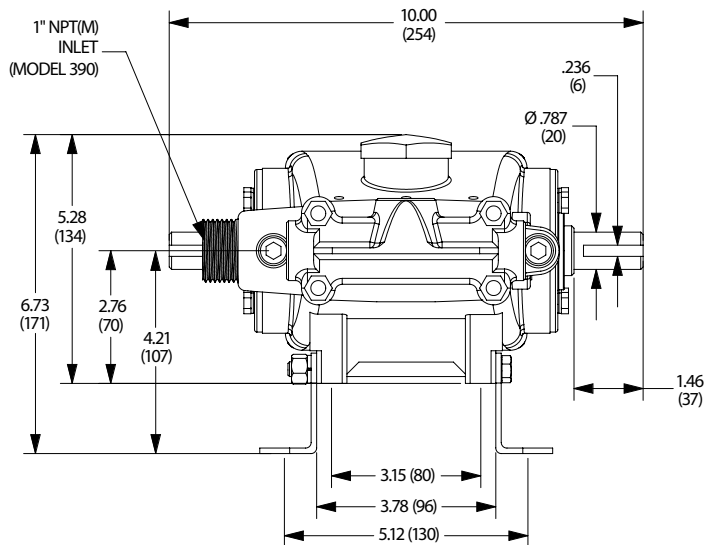

Models 323, 390

⚠ CAUTIONS AND WARNINGS

All high-pressure systems require a primary pressure regulating device (e.g. regulator, unloader) and a secondary pressure relief device (e.g. pop-off valve, relief valve). Failure to install such relief devices could result in personal injury or damage to pump or property. Cat Pumps does not assume any liability or responsibility for the operation of a customer's high-pressure system. Read all CAUTIONS and WARNINGS before commencing service or operation of any high-pressure system. The CAUTIONS and WARNINGS are included in each Service Manual and with each Accessory Data sheet. CAUTIONS and WARNINGS can also be viewed online at www.catpumps.com/dynamic-literature/cautions-and-warnings or can be requested directly from Cat Pumps.

WARRANTY

View the Limited Warranty online at www.catpumps.com/literature/cat-pumps-limited-warranty