

Models 42510-0000: Pump 42520-0000: Faucet 42530-0000: Pump & Faucet

ELECTRIC PUMP AND FAUCET

FEATURES

- · Quiet flow and low current draw
- Push Button switch operation
- Do-it-yourself installation
- Threads into tank or uses slip-on hose

Stainless steel swive speut fawaetkwith for Pricing/Ordering ABS plastic base



Models: 42510-0000, 42520-0000 42530-0000

SPECIFICATIONS - PUMP

Open Flow: 2.0 GPM (7.6 LPM) Flow @ 3 psi (0.2 bar): 1 GPM (3.8 LPM)

Fuse/Breaker: 2 Amp*

Voltage/Amp: 12V DC/1.6 Amp Nominal 3/8" NPT or 3/8" Barb Hose Intake Port:

Output Port: 3/8" Barb Hose

Meets USCG Regulations 183.410 and EN ISO 8846 **MARINE** for Ignition Protection.

SPECIFICATIONS - FAUCET

Switch Rating: 12V DC/5 Amps **Intake Port:** 3/8" Barb Hose

*Customer supplied, not included

Jabsco



MODEL 42530-0000


This single outlet water system pump is designed for use in boats, campers and van conversions. This is a centrifugal pump and must be mounted below water level of tank. The electric faucet is operated by a push button switch that frees your hands while washing. Stainless steel spout swings out of the way. ABS plastic base.


INSTALLATION


Mount pump below lowest tank water level, or screw into threaded fitting low on tank.

AIR LOCK

Air locks (pump runs but no water flows) can occur when the air trapped in the pump cannot escape and be replaced by water from the tank. This can be caused when water collects in a low point of a discharge hose which does not continually rise from the pump to the faucet.

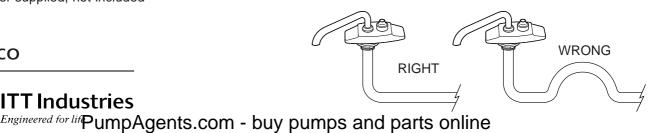

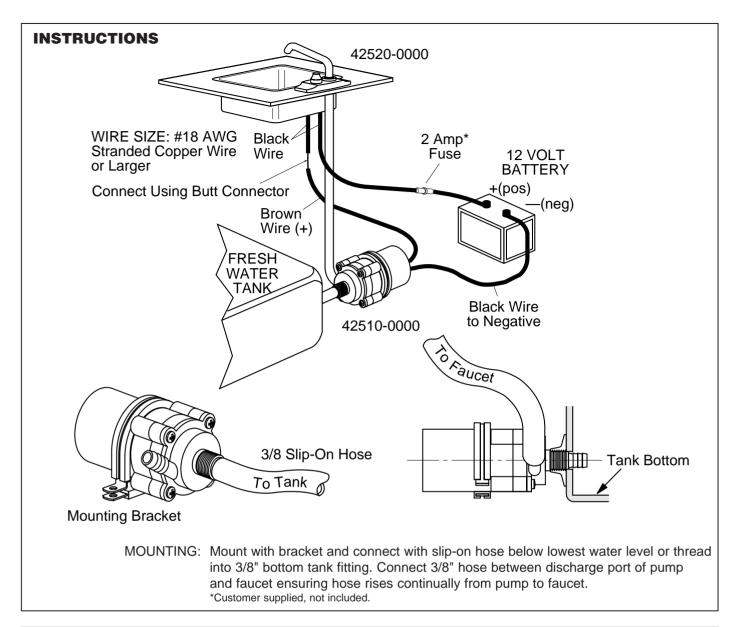

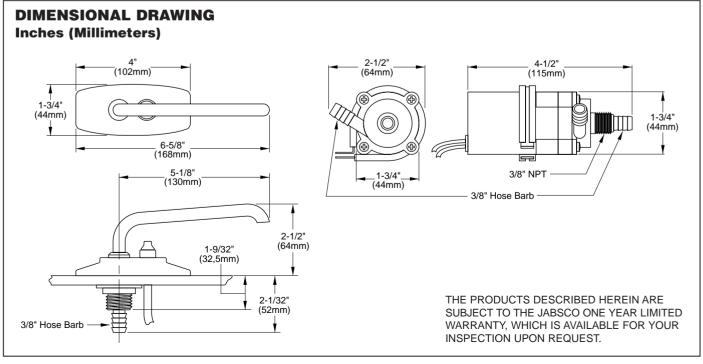

PumpAgents.com - buy pumps and parts online