

1-MA SERIES



Features


- Epoxy coated die-cast aluminum housing
- Oil-filled motor
- 7' maximum lift.
- 70 watts
- 1/4" MNPT Discharge
- Thermal overload protection on 521500 and 521286
- For submersible use only


Construction

- Motor 1/200 HP Oil Filled
- Intermittent Liquid Temp up to 120° F
- Intake N/A
- Discharge 1/4" MNPT
- Housing Epoxy coated cast aluminum
- Cover Epoxy coated cast aluminum
- Volute Polypropylene
- Impeller Polypropylene
- Shaft Seal Nitrile
- Screen Polypropylene

Small submersible oil-filled pump with epoxy coated cast aluminum housing. For commercial, industrial and home applications including statuary fountains, water displays, air conditioners, machine tool coolants, and many other applications where liquid must be transferred or recirculated. This compact 170 GPH pump features

1-MA SERIES

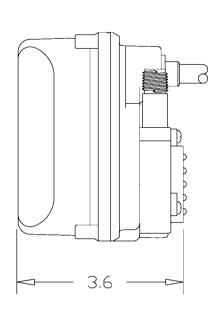


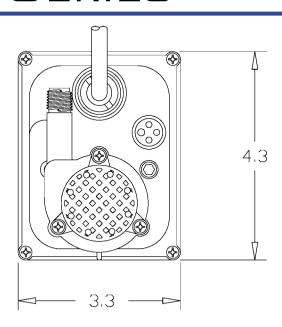

Specifications

Model	Item	em Discharge					Performance (GPH @ Head)			Shut Off		Pwr. Cord	Weight		
No.	No.	Size	Listing(s)	HP	Volts	Hertz	Amps	Watts	1'	3'	5'	Feet	PSI	(ft)	(Lbs.)
1-MA	521203	1/4" MNPT	UL	1/200	115	60	1.1	70	170	140	100	7	3.0	6	3.17
1-MA	521500	1/4" MNPT		1/200	127	60	1.1	70	170	140	100	7	3.0	6	3.17
1-MAT	521286	1/4" MNPT	UL/CSA	1/200	115	60	1.1	70	170	140	100	7	3.0	10	3.33

FLOW - LITERS/HOUR

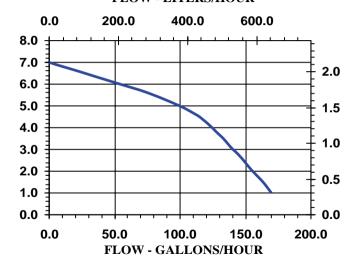

Replacement Parts

Volute	101350				
Impeller	101441				
Screen	122903				

Little Giant Pump Co.