


Little **GIANT** Pump Company®

4E-34NR SERIES

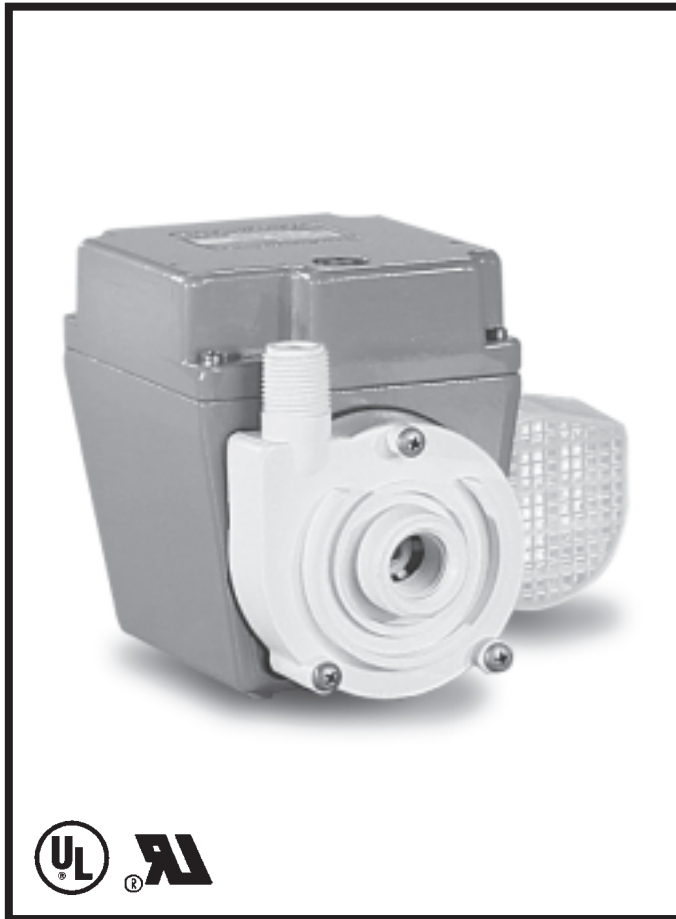

Features

- Epoxy coated die-cast aluminum housing
- Oil-filled motor
- 24.5' maximum lift
- 210 watts
- 1/2" MNPT discharge
- Thermal overload protection
- For submersible use only


Construction

- Motor — 1/12 HP
- Intermittent Liquid Temp. up to — 120° F
- Intake — 3/4" FNPT
- Discharge — 1/2" MNPT
- Housing — Epoxy coated cast aluminum
- Cover — Epoxy coated cast aluminum
- Volute — Nylon
- Impeller — Nylon
- Shaft Seal — Viton®
- Screen — Polypropylene

Small submersible oil-filled pump with epoxy coated cast aluminum housing. For commercial, industrial and home applications including statuary fountains, water displays, air conditioners, machine tool coolants, and


Little Giant Pump Co.

4E-34NR SERIES

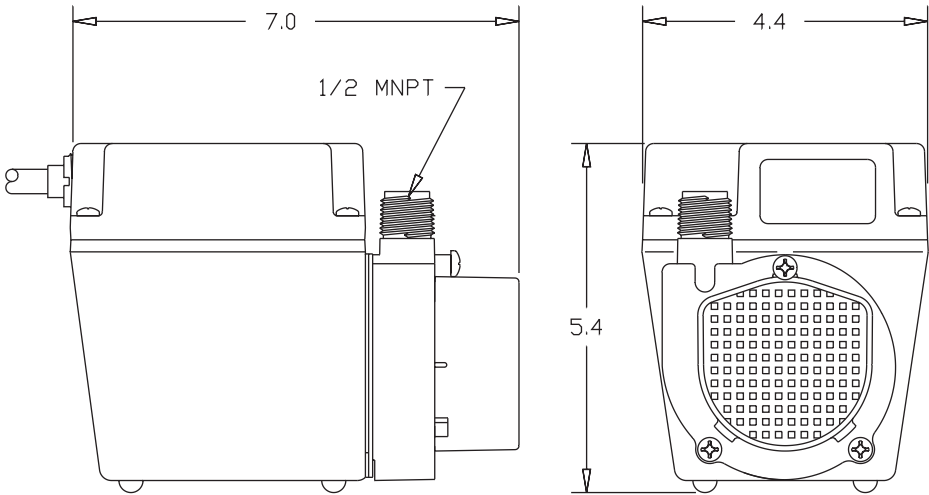

Specifications

| Model No. | Item No. | Discharge | Intake | Listing(s) | HP | Volts | Hertz | Amps | Watts | Performance (GPH @ Head) | | | | | Shut Off | | Pwr. Cord (ft) | Weight (Lbs.) |
|-----------|----------|-----------|-----------|------------|------|-------|-------|------|-------|--------------------------|-----|-----|-----|-----|----------|------|----------------|---------------|
| | | | | | | | | | | 1' | 3' | 5' | 10' | 20' | Feet | PSI | | |
| 4E-34NR | 504203 | 1/2" MNPT | 3/4" FNPT | UL | 1/12 | 115 | 60 | 3.5 | 210 | 810 | 790 | 745 | 613 | 173 | 24.5 | 10.6 | 6 | 8.50 |
| 4E-34NRY | 504216 | 1/2" MNPT | 3/4" FNPT | UR | 1/12 | 230 | 50/60 | 1.7 | 210 | 810 | 790 | 745 | 613 | 173 | 24.5 | 10.6 | 12 | 8.50 |

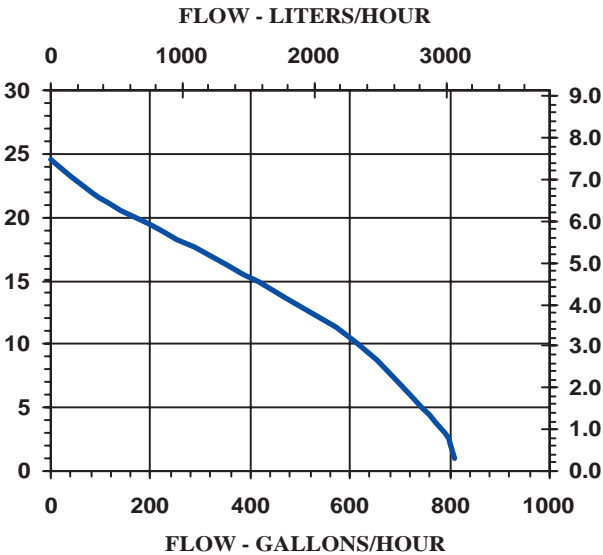

Replacement Parts

| | |
|----------|--------|
| Volute | 103334 |
| Impeller | 104435 |
| Screen | 102909 |
| Gasket | 103601 |

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Little Giant Pumps Home >>](#)

[Little Giant Pumps stock list >>](#)