


LittleGIANT®

PE-A SERIES

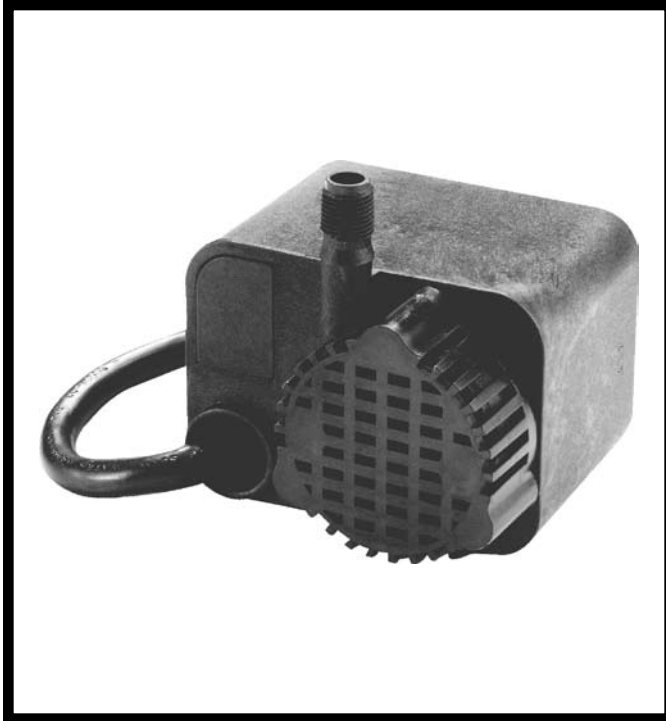

Features


- Epoxy encapsulated motor
- 4.0' maximum lift
- 17 watts
- 1/8" MNPT discharge
- Impedance protected
- For submersible use only

Construction

- Motor — 1/250 HP epoxy encapsulated
- Maximum Flow Rate — 70 GPH @ 1'
- Maximum Head — 4.0'
- Intermittent Liquid Temp. up to — 120°F
- Intake — Screened
- Discharge — 1/8" MNPT
- Housing — Glass-filled polyester
- Cover — Glass-filled polyester
- Volute — Glass-filled polyester
- Impeller — Polypropylene
- Shaft Seal — Viton®
- Screen — Polypropylene
- Electrical — 115V, 60 Hz


Small submersible epoxy encapsulated pump designed for light duty water recirculation. Ideal for statuary and water displays. This compact 70 GPH pump features a 1/8" MNPT discharge, 4.0' shut-off head capability, screened inlet and a 6' power cord.

PE-A SERIES

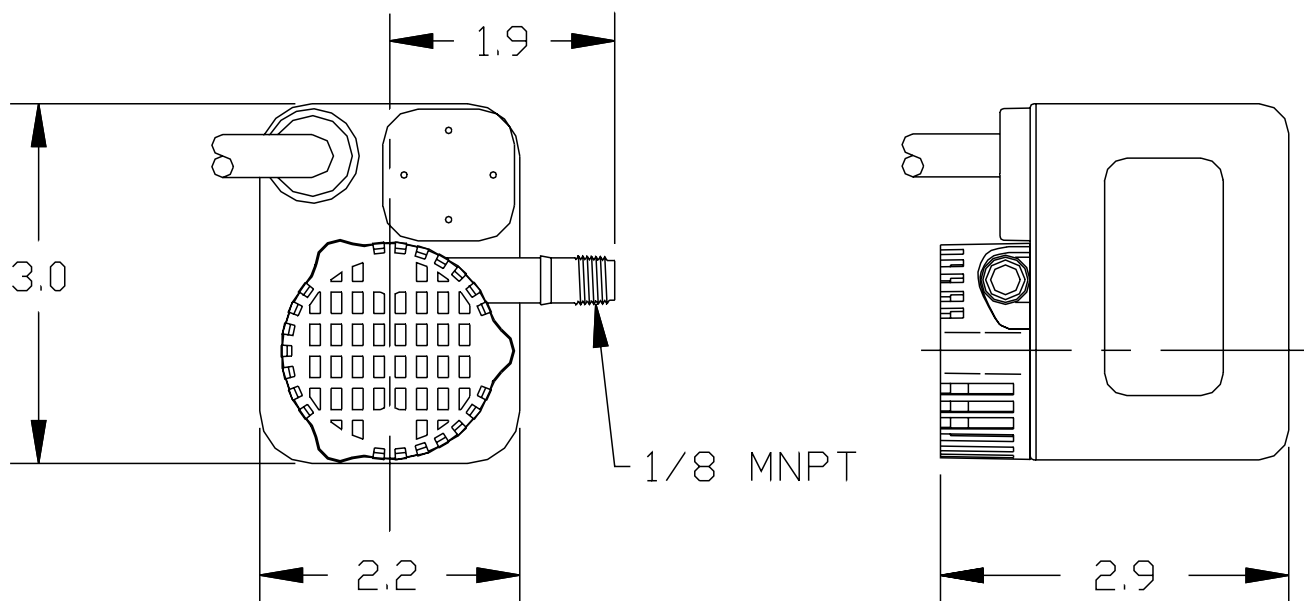

Specifications

Model No.	Item No.	Discharge Size	Listing(s)	HP	Volts	Hertz	Amps	Watts	Performance (GPH@Head)		Shutoff		Cord Length (ft.)	Weight (lbs.)
									1'	3'	Ft.	P.S.I.		
PE-A	518100	1/8" MNPT	UL/CSA	1/250	115	60	.03	17	70	40	4.0	1.75	6	2.08

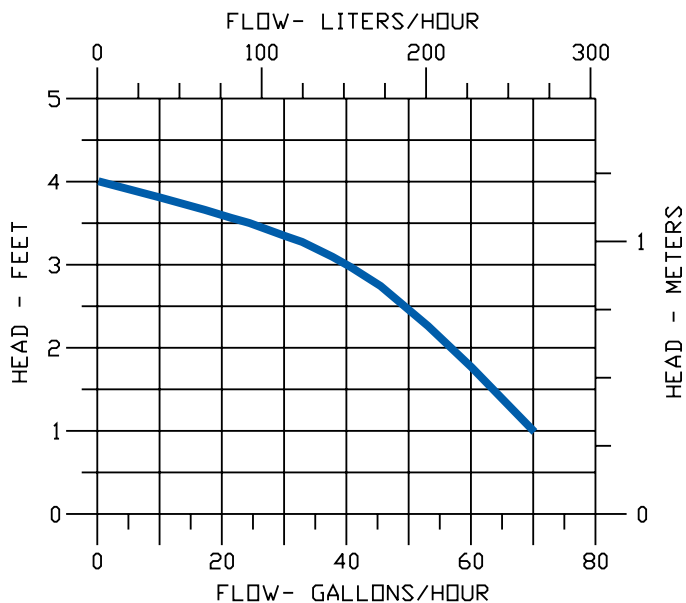

Replacement Parts

Plate	118922
Impeller	118443
Screen	118904