

MARINE PRODUCT DATA SHEET

OEM
AFTERMARKET

1700-010-030 (800 GPH)
1700-011-030 (800 GPH)



Bait Sentry Livewell Pump



TYPICAL APPLICATIONS

12VC Bait/Livewell Application. For other applications, contact SHURflo.

PUMP

Type:	Centrifugal Pump
Port (Outlet):	3/4" Barb
Port (Inlet)	3/4" NPT-M
Wash Down (Inlet)	1/2" NPT-F
Liquid:	130 °F [54 °C] Max
Prime:	Flooded Inlet
Inlet PSI:	30 PSI [2.1 Bar] Max
Run Dry:	Yes

ELECTRICAL

Motor:	12VDC Permanent Magnet, Continuous Duty
Protection:	External Fuse
Leads:	6 ft (1.8M) Twisted Jacketed Cable
Fuse:	5 Amp Recommended
Control:	No Control

MATERIALS

Housing:	High Strength Nylon
Impeller:	Acetal
Hardware:	Stainless Steel

APPROVALS

Ignition Protected, ISO 8846

WARRANTY


3 Year Limited Warranty
See SB-1050 For Full Warranty Details

SHIPPING

Net Weight (Boxed):	2.5 Lb [1.1 Kg] each
Carton Weight:	14 Lb [6.3 Kg]
Pump in Carton	6
Carton Size:	16"L x 11"W x 11"H [41 cm x 28 cm x 28 cm]

RELATED DOCUMENTS

Catalog:	MS-030-083 / 030-084
Installation Manual:	911-466
Maintenance:	911-466
Applications Spec Guide:	MS-020-005
Warranty:	SB-1041 / SB-1050

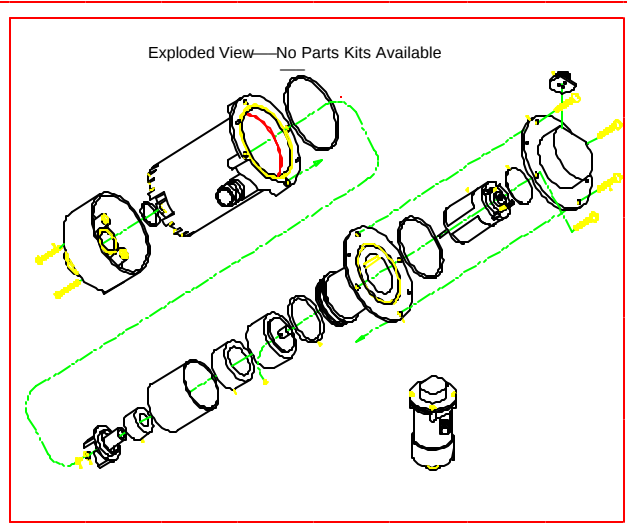

MARINE PRODUCT DATA SHEET

OEM

1700-010-030 (800 GPH)


AFTERMARKET

1700-011-030 (800 GPH)




TYPICAL PERFORMANCE @ 12V DC

PRESSURE		FLOW		CURRENT
METERS	FT OF HEAD	GPH	LPH	AMPS
0.0	0	800	3028	3.5
1.5	5	390	1476	2.6
2.7	9	0	0	2.2

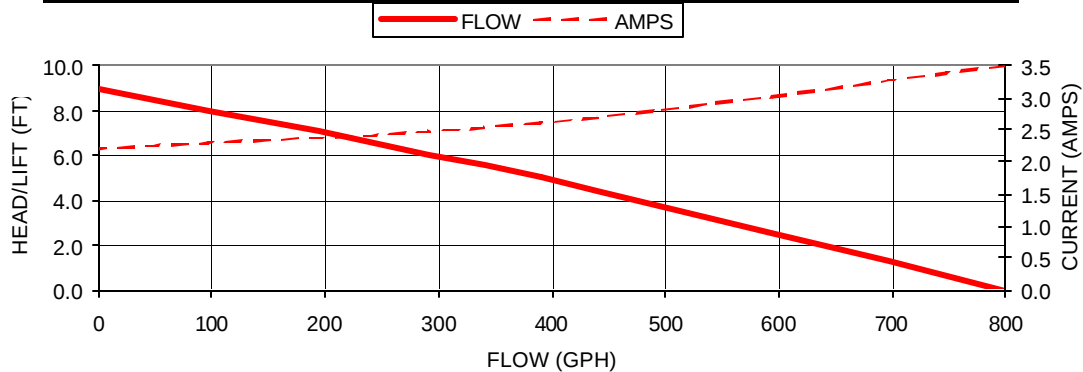

DIMENSIONS [mm]

MODEL: 1700-000-030

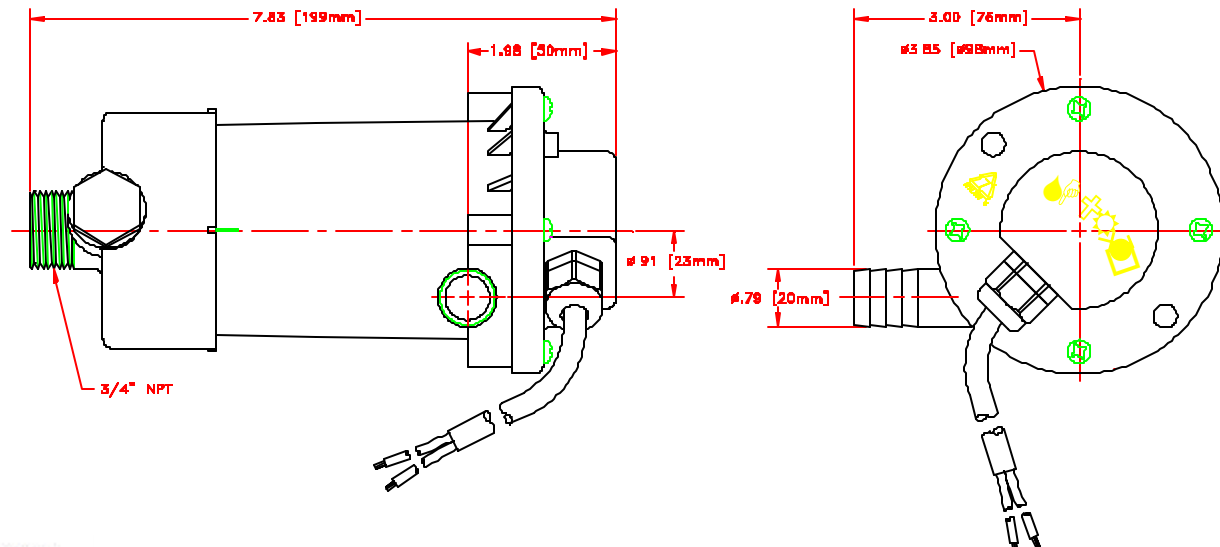

For technical advice or service please take your pump into your local pump service center.
To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)