www.PumpAgents.com PumpAgents.com - Click here for Pricing/Ordering





MARINE PRODUCT DATA SHEET OEM: 2901-0203 AFTERMARKET: 2901-0213

The Next Generation SHURflo pumps guarantee quiet operation and smooth performance while providing the ultimate in durability and reliability. Designed and built specially for the harsh marine environment, the Next Generation SHURflo pumps are equipped with sealed switches and seamless e-coated motors.

TYPICAL APPLICATIONS

Multi-fixture marine fresh water installation. Other uses may included 12V DC pressurized water systems in cabins. This pump may be used for general water transfer. For other applications contact SHURflo.

PUMP:

Type: 3 Chamber Diaphragm Ports: 1/2"-14 NPSM-Male. Liquid: 130 °F [54 °C] Max Prime: 6 feet [1.82 M] Inlet PSI: 30 PSI [2.1 Bar] Max Run Dry: Yes

ELECTRICAL:

Motor:	12VDC Permanent Magnet, Intermittent Duty
Protection:	Thermal Overload, Automatic Restart
Leads:	16 AWG, 16" [40 cm] Red +, 13" [33 cm] Black -
Fuse:	7 Amp Recommended
Control:	Adjustable Switch. Shut-Off 30 PSI [2.0 Bar] ± 5 PSI [0.4 Bar]
	Restart 15 PSI [1.0 Bar] ± 5 PSI [0.4 Bar]

MATERIALS:

Housing:	Polypro
Valves:	EPDM
Diaphragm:	Santoprene
Hardware:	Stainless Steel

APPROVALS:

Ignition Protected, CE, ISO 8846

WARRANTY:

3 Year Limited Warranty See SB-1050 For Full Warranty Details


SHIPPING:

Net Weight (Boxed):	4.8 Lb [2.2 Kg] each
Carton Weight:	58 Lb [26.3 Kg]
Carton Size:	24"L x 18"W x 11"H
	[60.9 cm x 45.7 cm x
	27.9 cm]

RELATED DOCUMENTS:

Catalog:	
Installation Manual:	
Maintenance:	
Applications Spec Guide:	
Warranty:	
-	

MS-030-140 911-740 911-740 MS-020-005 SB-1050

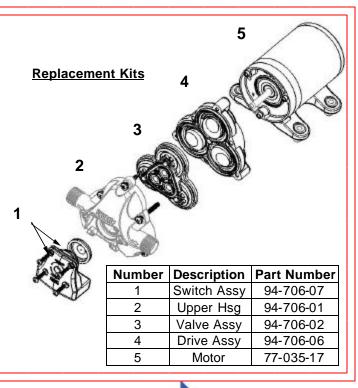




PDS 2901-0203

Revised: 11/06

Date: November 05 PumpAgents.com - buy pumps and parts online

www.PumpAgents.com PumpAgents.com - Click here for Pricing/Ordering

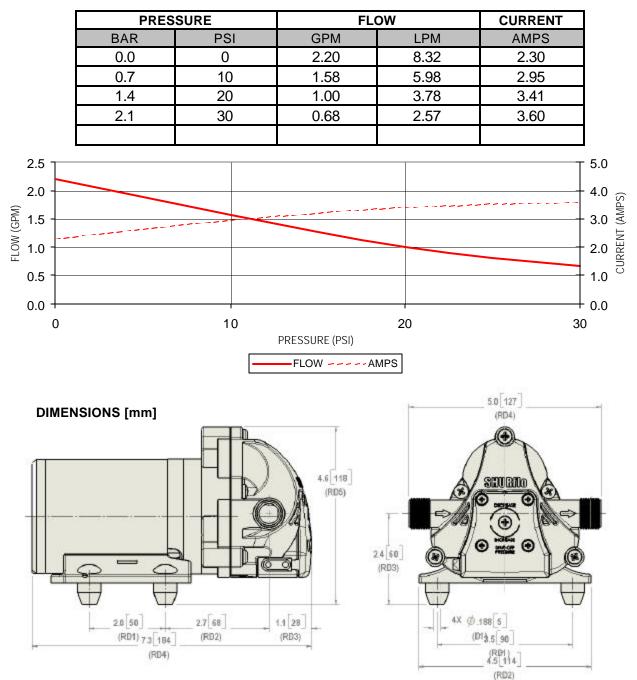





*ISO Registered Facility PAR DEDISS GOM to buy pumps, and, parts sollings.

SGS

