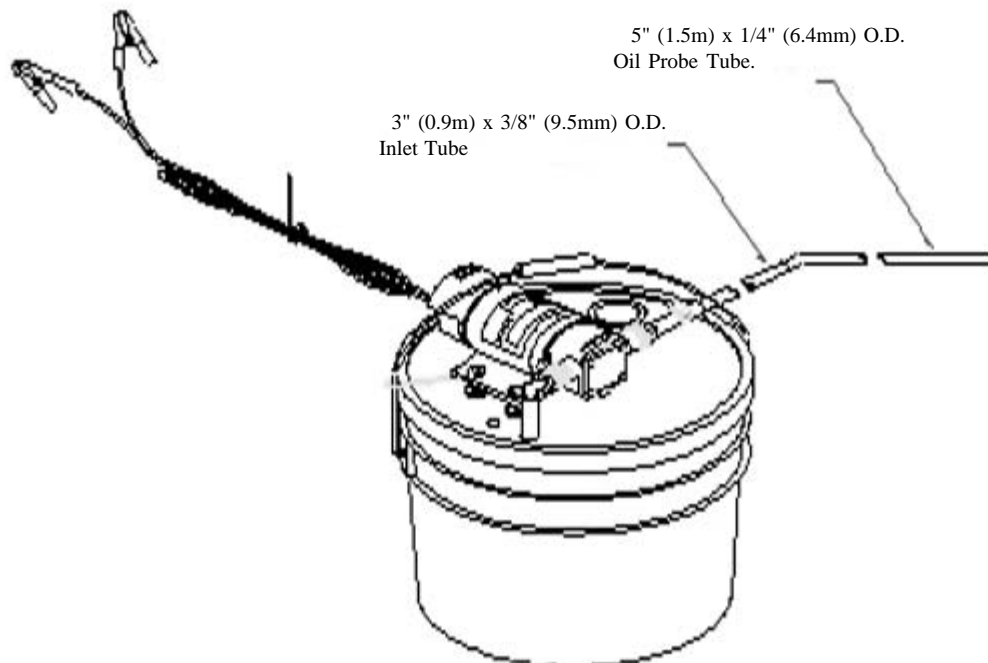


**PRODUCT DATA SHEET****MODEL: 3000-400****SPECIFICATIONS:****MODEL NUMBER:** 3000-400**PUMP DESIGN:** Flexible Impeller Pump With a 3-Way Switch & 8 Ft. [2.4 M] Cable
With Battery Clips Mounted on a 3.5 Gallons (13.2 Liters) Pail**REVERSIBLE FLOW:** Yes**VOLTAGE:** 12 VDC Nominal**MOTOR:** Permanent Magnet, Thermally Protected**OPERATING PRESSURE:** 15 PSI (1.0 Bars) Max.**LIQUID TEMPERATURE:** 40 °F to 185 °F Max. [4 °C to 85 °C] Oil Should Be
Heated to 140 °F to 160 °F [60 °C to 71 °C] For Max. Pump Efficiency**PRIMING:** Pre-Lube Inlet Prior to Pump Operation**MATERIAL OF CONSTRUCTION: (PUMP ONLY)****PLASTICS-** Glass Filled Polyester**IMPELLER-** Buna-n**LIP SEAL-** Buna-n**FASTENERS-** Stainless Steel**NET WEIGHT:** 6.2 Lbs (2.8 Kg)**OVERALL DIMENSIONS:** Height 16" (406 mm), Diameter 12-1/2" (318 mm)**DUTY CYCLE:** Intermittent**AGENCY CERTIFICATION:** None**TYPICAL APPLICATIONS:** General Purpose Oil Changer Pump

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)