



www.PumpAgents.com PumpAgents.com - Click here for Pricing/Ordering

MARINE PRODUCT DATA SHEET 357-011-01 (500 GPH) OEM: AFTERMARKET: 357-011-11 (500 GPH)

For a complete package combined the Piranha Series Bilge pumps with our reliable automatic float switch. Our tough, high density nylon housing and heavy duty water cooled motor gives the SHURflo Bilge Pump unparalleled reliability. Adding non-mercury, solid state controlled switch with 2 second our time delay ensures easy removal of water from the bilge. Easy Installation and removable cartridge for easy cleaning.

TYPICAL APPLICATIONS

12V Marine Bilge Water Evacuation. For other applications, contact SHURflo.

PUMP

Type:	Centrifugal Pump
Port:	3/4" Barb
Liquid:	130 °F [54 °C] Max
Prime:	Flooded Inlet
Run Dry:	No

ELECTRI CAL

Motor:	12VDC Permanent Magnet, Continuous Duty
Protection:	External Fuse
Pump Leads:	6 ft [1.8M] Tinned, 16 AWG
Switch Leads:	6 ft [1.8M] Tinned, 18 AWG
Fuse:	2.5 Amp Recommended
Control:	Solid State Control with two second time delay,
	engaging only when water is in the bilge.

MATERIALS

High Strength Nylon Housing: Impeller: High Strength Nylon Hardware: Stainless Steel

APPROVALS

Ignition Protected, CE, ISO 8846

WARRANTY

3 Year Limited Warranty See SB-1050 For Full Warranty Details

SHIPPING

Net Weight (Boxed):	1.25 [Kg] each
Carton Weight:	30 Lb [13.6 Kg]
Pumps in Carton:	24
Carton Size:	24"L x 18"W x 11" H [61 cm x 46 cm x 28 cm]

RELATED DOCUMENTS


Catalog:	MS-030-140
Installation Manual:	911-593-00
Maintenance:	911-593-00
Applications Spec Guide:	MS-020-005
Warranty:	SB-1050




PDS 357-011-01

Rev. 11/06

PumpAgents.com - buy pumps and parts online



www.PumpAgents.com PumpAgents.com - Click here for Pricing/Ordering

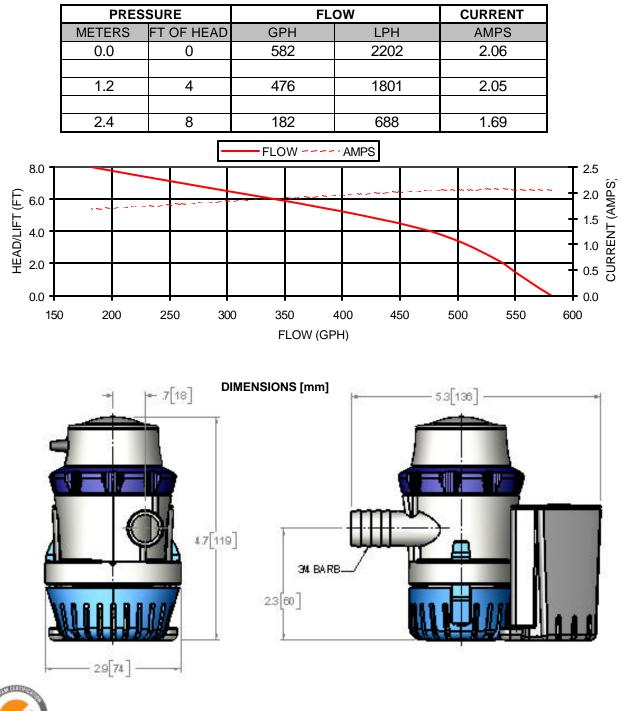

PERFORMANCE @ 13.6V DC

*ISO Registered Facility

SGS

RumpAgents, gompabyychumps, and parts, paline

