

SHURflo



MARINE PRODUCT DATA SHEET

OEM: 358-000-00 (1500 GPH)
AFTERMARKET: 358-000-10 (1500 GPH)

Heavy duty and built to last. SHURflo's 1500 nylon bilge pump offer a unique motor cooling system (patent pending) to ensure efficient performance and long life. Installation is a snap with our patented swivel base and 6' tinned wire assembly.

TYPICAL APPLICATIONS

12V Marine Bilge Water Evacuation. For other applications, Contact SHURflo.

PUMP

Type: Centrifugal Pump
 Port: 1 1/8" Barb
 Liquid: 130 °F [54 °C] Max
 Prime: Flooded Inlet
 Inlet PSI: N/A
 Run Dry: No

ELECTRICAL

Motor: 12VDC Permanent Magnet, Continuous Duty
 Protection: External Fuse
 Leads: 6 ft (1.8M) Tinned, 16 AWG
 Fuse: 10 Amp Recommended
 Control: No Control

MATERIALS

Housing: High Strength Nylon
 Impeller: High Strength Nylon
 Hardware: Stainless Steel

APPROVALS

Ignition Protected, CE, ISO 8846

WARRANTY

3 Year Limited Warranty
 See SB-1050 For Full Warranty Details

SHIPPING

Net Weight (Boxed): Lb (Kg) each
 Carton Weight: Lb [13.6 Kg]
 Pumps in Carton: 8
 Carton Size: "L x "W x " H [cm x cm x cm]

RELATED DOCUMENTS

Catalog: MS-030-140
 Installation Manual: 911-742
 Maintenance: 911-742
 Applications Spec Guide: MS-020-005
 Warranty: SB-1050


Replacement Kit

94-007-01




PERFORMANCE @ 13.6V DC

PRESSURE		FLOW		CURRENT
METERS	FT OF HEAD	GPH	LPH	AMPS
0.0	0	1800	6813	7.75
1.20	4	1650	6442	7.5
2.40	8	1400	5299	7.0

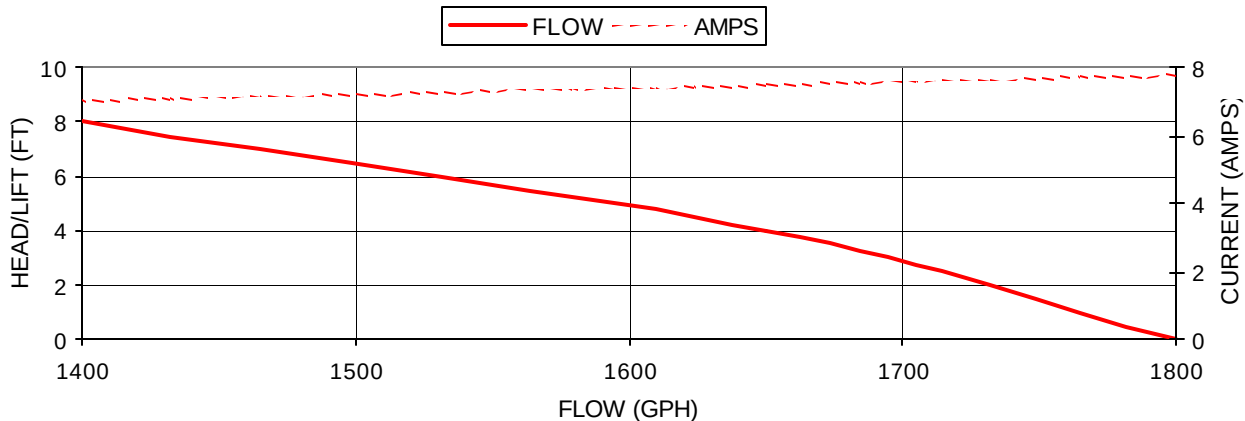

DIMENSIONS [mm]

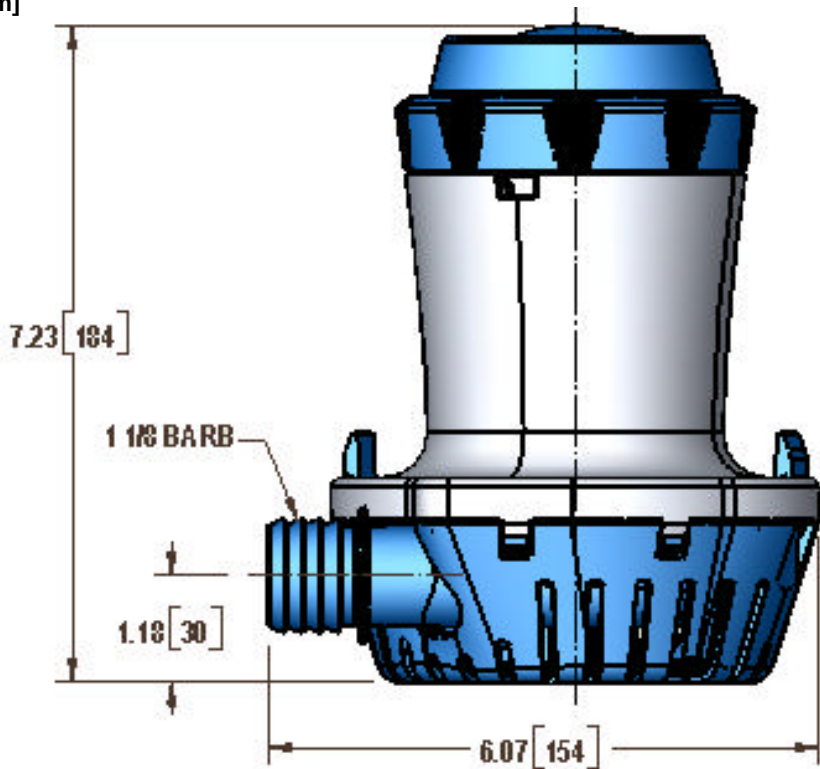

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)