

MARINE PRODUCT DATA SHEET

OEM 4901-2202
AFTERMARKET 4901-2212



Wash-Down 4.0



TYPICAL APPLICATIONS

12 VDC pressurized water systems and wash down pump. For other applications, contact SHURflo.

PUMP

Type: 4 Chamber Diaphragm
Ports: Quick Connect Fittings.
Liquid: 130 °F [54 °C] Max
Prime: 6 feet [1.82 M]
Inlet PSI: 30 PSI [2.1 Bar] Max
Run Dry: Yes

ELECTRICAL

Motor: 12VDC Permanent Magnet, Intermittent Duty
Protection: Thermal Overload, Automatic Restart
Leads: 14 AWG, 16" [40 cm] Red +, 13" [33 cm] Black -
Fuse: 15 Amp Recommended
Control: Adjustable Switch. Shut-Off 45 PSI [3.1 Bar] ± 5 PSI [0.4 Bar]
Restart 25 PSI [1.8 Bar] ± 5 PSI [0.4 Bar]

MATERIALS

Housing: Nylon
Valves: EPDM
Diaphragm: Santoprene
Hardware: Stainless Steel

APPROVALS

Ignition Protected, ISO 8846

WARRANTY


3 Year Limited Warranty
See SB-1041 & SB-1050 For Full Warranty Details

SHIPPING

Net Weight (Boxed): Lb [Kg] each
Carton Weight: each, Lb [Kg]
Carton Size: "L x "W x "H [cm x cm x cm]

RELATED DOCUMENTS

Catalog: MS-030-084
Installation Manual: 911-699
Maintenance: 911-699
Applications Spec Guide: MS-020-005
Warranty: SB-1041 / SB-1050

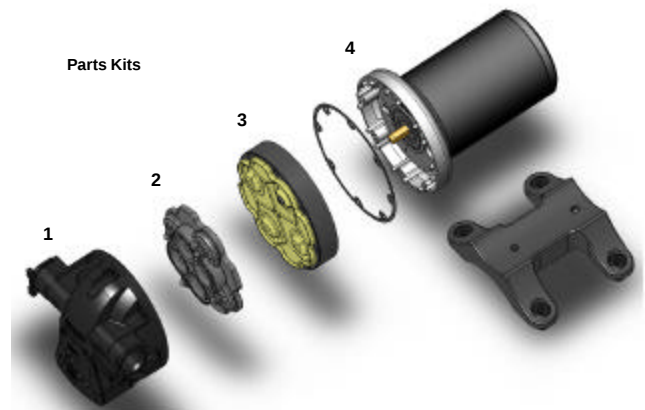

Number	Components	Parts Kits
1	Housing / Switch	94-668-00
2	Valve Assembly	94-669-00
3	Drive Assembly	94-670-00
4	Motor	77-013-17



MARINE PRODUCT DATA SHEET

OEM

4901-2202


AFTERMARKET

4901-2212




TYPICAL PERFORMANCE @ 12V DC

PRESSURE		FLOW		CURRENT
BAR	PSI	GPM	LPM	AMPS
0.0	0	4.0	15.1	4.1
0.7	10	3.3	12.5	6.3
1.4	20	2.9	10.1	7.6
2.1	30	2.7	10.2	8.8
2.8	40	2.4	9.0	10.0

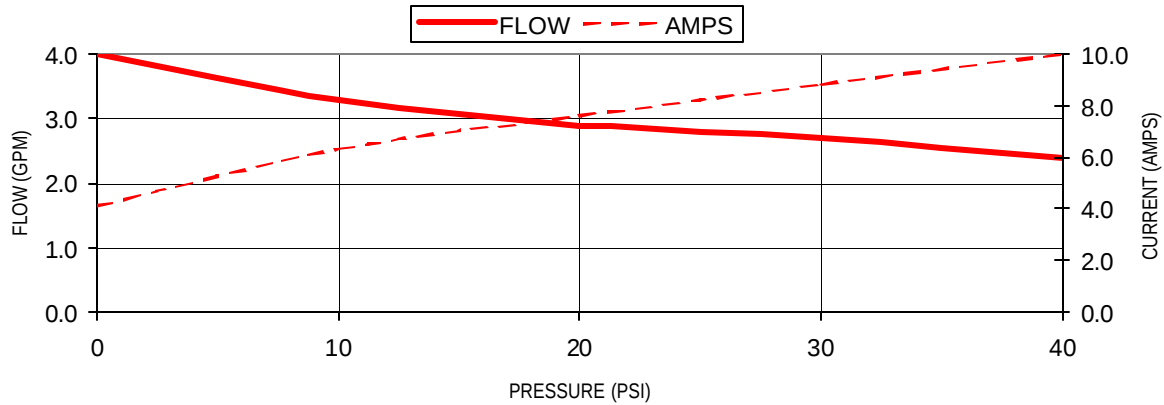

DIMENSIONS [mm]

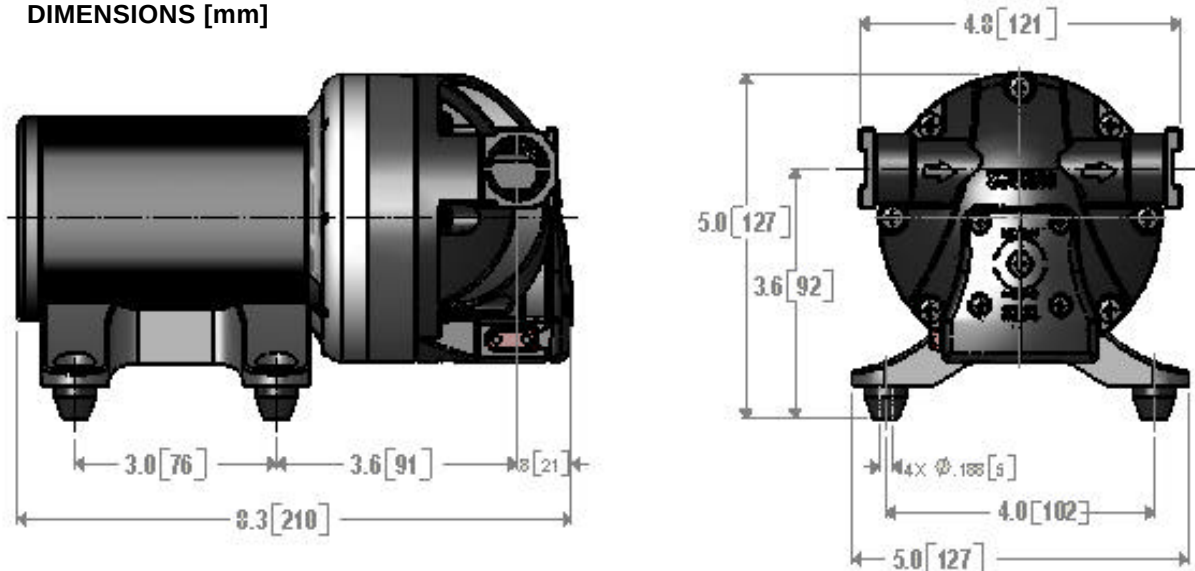

*ISO Registered Facility

PumpAgents.com - buy pumps and parts online

SHURflo reserves the right to update specifications, prices, or make substitutions.



For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)