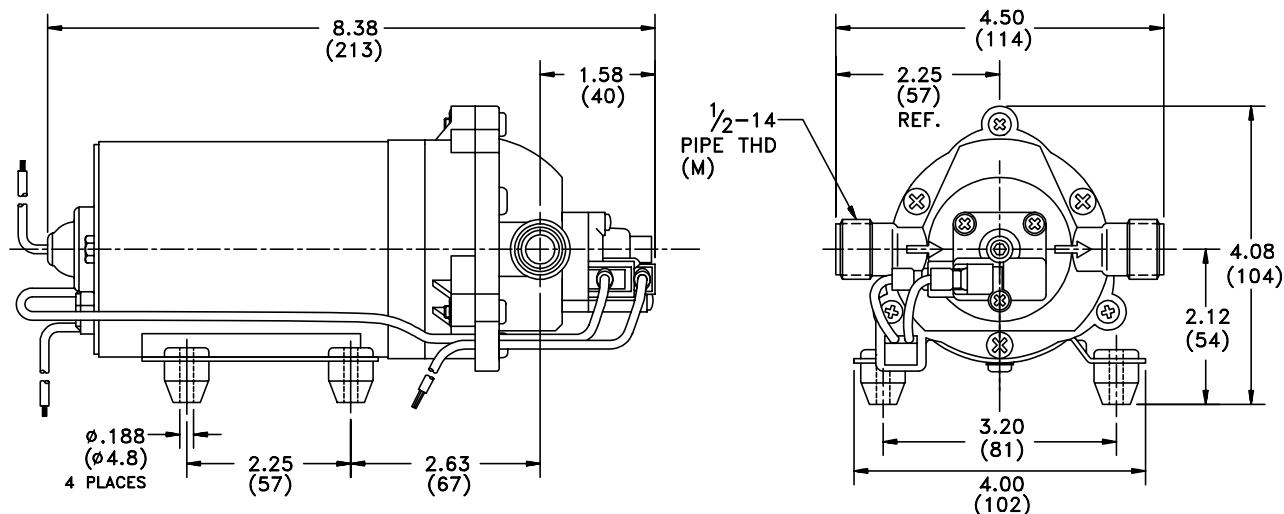
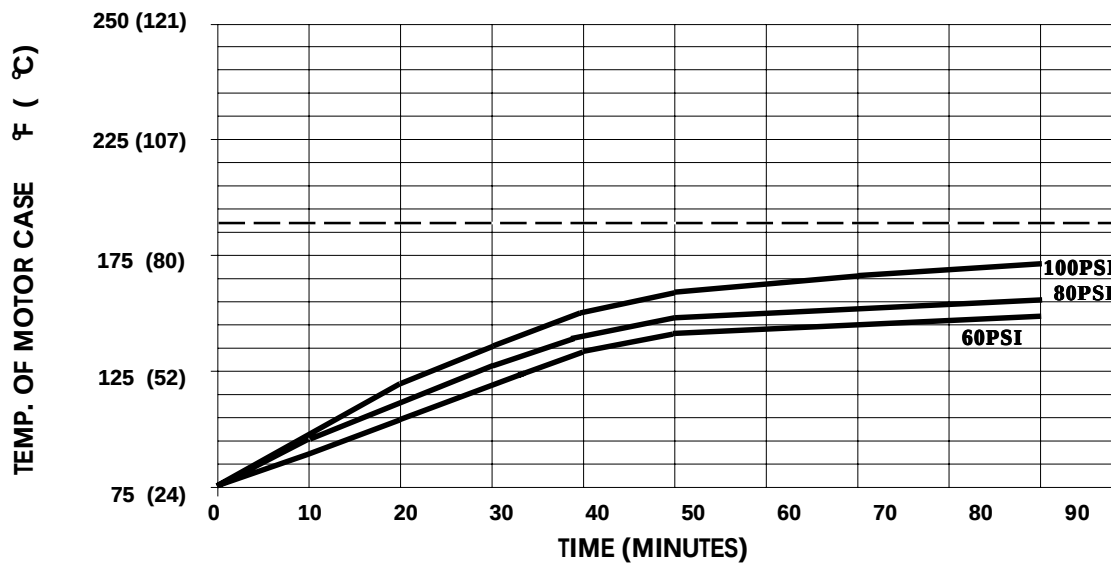



**PRODUCT DATA SHEET****MODEL: 8000-813-138****SPECIFICATIONS:****MODEL NUMBER:** 8000-813-138**PUMP DESIGN:** Positive Displacement 3 Chamber Diaphragm Pump**CHECK VALVE:** (2-Way Op.) Prevents Reverse Flow & 6 Ft. Head Forward Flow**CAM:** 3.0 Degree**MOTOR:** Permanent Magnet, P/N 11-150-10, Thermally Protected**VOLTAGE:** 115 VAC Nominal**PRESSURE SWITCH:** Adjustable Shut-Off (Range 80-100 PSI)Factory Set @100 PSI, Turn On 85 PSI $\pm$ 5 PSI**LIQUID TEMPERATURE:** 180 Degrees Fahrenheit (82 Degrees Centigrade) Max.**PRIME:** Self-Priming Up To 8.0 Ft. Vertical,
Max. Inlet Pressure 30 PSI (2.1 Bar)**PORTS:** 1/2"-14 Male Parallel Thread**MATERIAL OF CONSTRUCTION:****PLASTICS-** Nylon**VALVES-** Viton**DIAPHRAGM-** Santoprene**FASTENERS-** Zinc or Cad Plated Steel**NET WEIGHT:** 4.8 Lbs (2.18 Kg)**DUTY CYCLE:** Intermittent (See Temperature Rise Chart)**APPROVALS:** UL/CSA Recognized Component**TYPICAL APPLICATIONS:** Soil Extraction**DIMENSIONS:**

MODEL: 8000-813-138

TEMPERATURE RISE

THIS GRAPH IS FOR USE AS A DESIGN GUIDE. IT IS BASED ON RUNNING CONTINUOUSLY WITH AN AMBIENT TEMPERATURE OF 75° F IN STILL AIR. THE THERMAL BREAKER WILL OPEN WHEN THE CASE TEMPERATURE REACHES 190° F.

[- - - - - TRIP POINT OF THERMAL PROTECTOR]

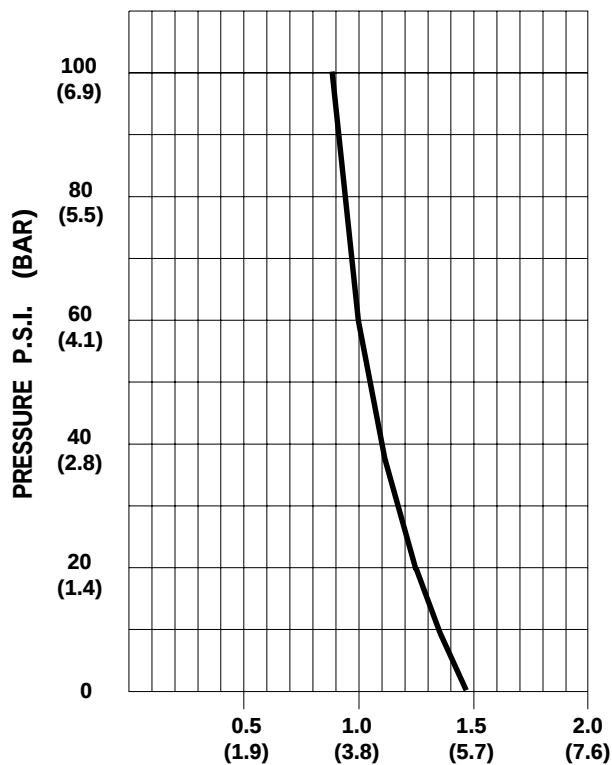TYPICAL PERFORMANCE

PRESSURE (PSI)	FLOW (GPM/LIT)	RPM MIN/MAX	CURRENT (AMPS)	VOLTAGE (VOLTS)
OPEN	1.47/5.6	2260/2275	0.40	115VAC
10	1.35/5.1	2160/2180	0.46	"
20	1.26/4.8	2095/2110	0.51	"
30	1.17/4.4	2025/2040	0.56	"
40	1.10/4.2	1965/1980	0.61	"
50	1.05/4.0	1905/1915	0.65	"
60	1.00/3.8	1860/1870	0.70	"
70	0.96/3.6	1810/1820	0.74	"
80	0.93/3.5	1760/1770	0.78	"
90	0.89/3.4	1715/1720	0.82	"
100	0.85/3.2	1670/1675	0.85	"

-SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

PumpAgents.com - buy pumps and parts online

For technical advice or service please take your pump into your local pump service center.
To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)