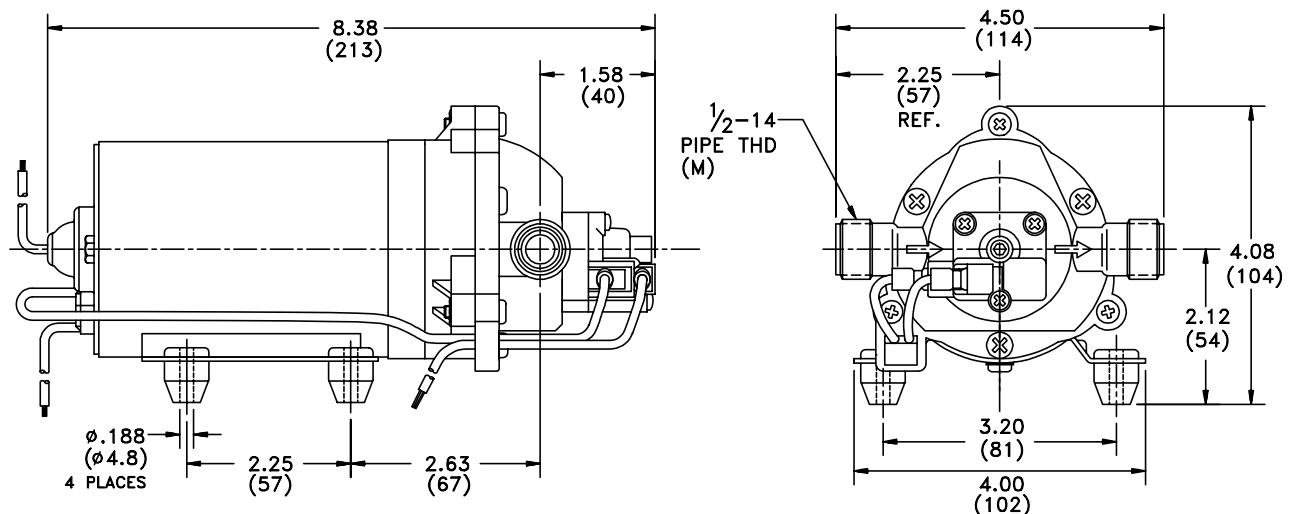



**PRODUCT DATA SHEET****MODEL: 8000-883-138****SPECIFICATIONS:****MODEL NUMBER:** 8000-883-138**PUMP DESIGN:** Positive Displacement 3 Chamber Diaphragm Pump**CHECK VALVE:** (1-Way Operation) Prevents Reverse Flow**CAM:** 3.0 Degree**MOTOR:** Permanent Magnet, P/N 11-179-00**VOLTAGE:** 36 VDC Nominal**PRESSURE SWITCH:** Adjustable Shut-Off (Range 80-100 PSI)Factory Set @100 PSI, Turn On 75 PSI \pm 5 PSI**LIQUID TEMPERATURE:** 180 Degrees Fahrenheit (82 Degrees Centigrade) Max.**PRIME:** Self-Priming Up To 10 Ft. Vertical,

Max. Inlet Pressure 30 PSI (2.1 Bar)

PORTS: 1/2"-14 Male Parallel Thread**MATERIAL OF CONSTRUCTION:****PLASTICS-** Nylon**VALVES-** Viton**DIAPHRAGM-** Santoprene**FASTENERS-** Zinc Plated Steel**NET WEIGHT:** 4.85 Lbs (2.2 Kg)**DUTY CYCLE:** Intermittent (See Temperature Rise Chart)**TYPICAL APPLICATIONS:** Soil Extraction**DIMENSIONS:**


MODEL: 8000-883-138

TEMPERATURE RISE

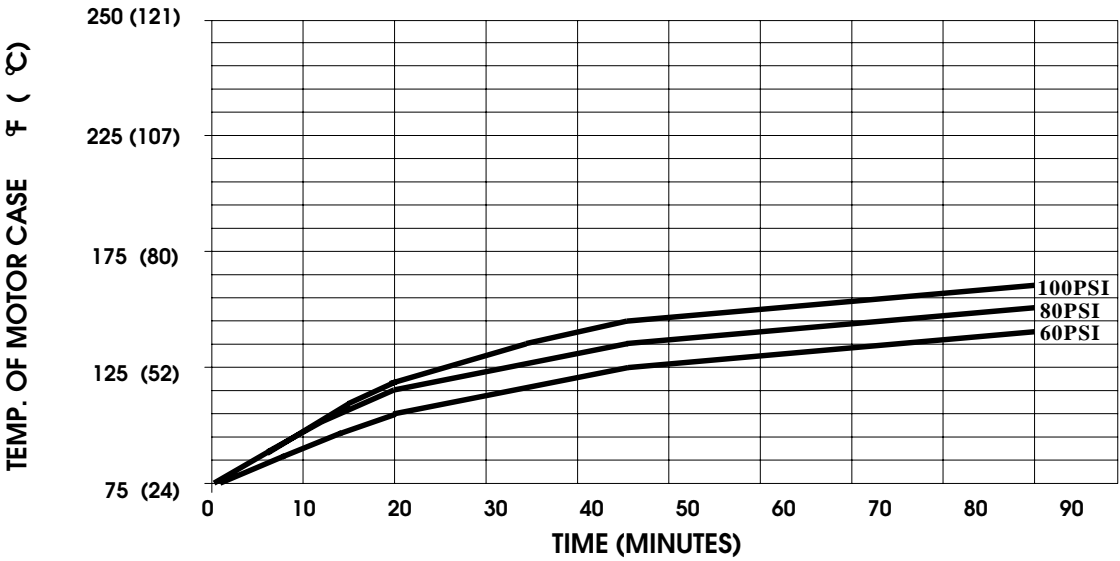

THIS GRAPH IS FOR USE AS A DESIGN GUIDE. IT IS BASED ON RUNNING CONTINUOUSLY WITH AN AMBIENT TEMPERATURE OF 75° F IN STILL AIR.

TYPICAL PERFORMANCE

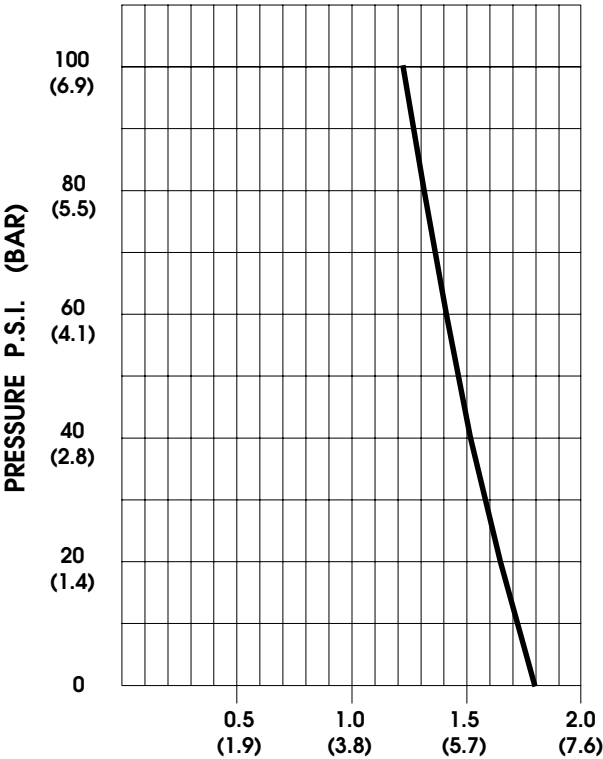

PRESSURE (PSI)	FLOW (GPM/LIT)	RPM MIN/MAX	CURRENT (AMPS)	VOLTAGE (VOLTS)
OPEN	1.80/6.8	2400/2435	1.25	36 VDC
10	1.73/6.5	2370/2415	1.50	"
20	1.65/6.2	2345/2390	1.70	"
30	1.58/6.0	2330/2365	1.95	"
40	1.52/5.8	2300/2345	2.20	"
50	1.46/5.5	2280/2330	2.40	"
60	1.41/5.3	2260/2310	2.55	"
70	1.35/5.1	2240/2290	2.75	"
80	1.31/5.0	2220/2275	2.85	"
90	1.26/4.8	2195/2250	3.10	"
100	1.22/4.6	2180/2230	3.30	"

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)