
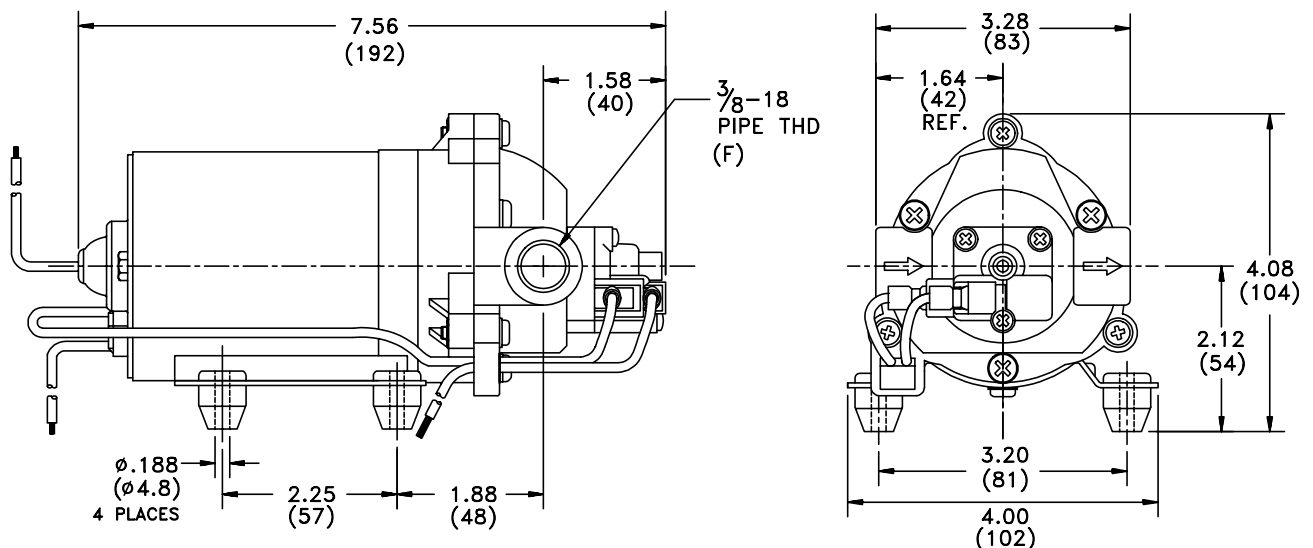



**PRODUCT DATA SHEET****MODEL: 8005-733-954****SPECIFICATIONS:****MODEL NUMBER:** 8005-733-954**PUMP DESIGN:** Positive Displacement 3 Chamber Diaphragm Pump**CAM:** 3.0**MOTOR:** 11-150-00 Permanent Magnet**VOLTAGE:** 100 VAC Nominal**PRESSURE SWITCH:** Adjustable Shut-off (Range 40-60 PSI)Factory set @ 40 PSI, Turn on 45 $\pm$ 5 PSI**LIQUID TEMPERATURE:****PRIME:** Self Priming up to 8 ft Vertical**PORTS:** 3/8" -18 NPT Female**MATERIAL OF CONSTRUCTION:****PLASTICS-** Polypropolyne**VALVES-** EPDM**DIAPHRAGM-** Santoprene (STD)**FASTENERS-** Zinc Plated Steel**NET WEIGHT:** 3.9 Lbs (1.77 Kg)**DUTY CYCLE:** Intermittent (See Temperature Rise Chart)**BYPASS:** 45 Bypass**DIMENSIONS:**

MODEL: 8005-733-954

TEMPERATURE RISE

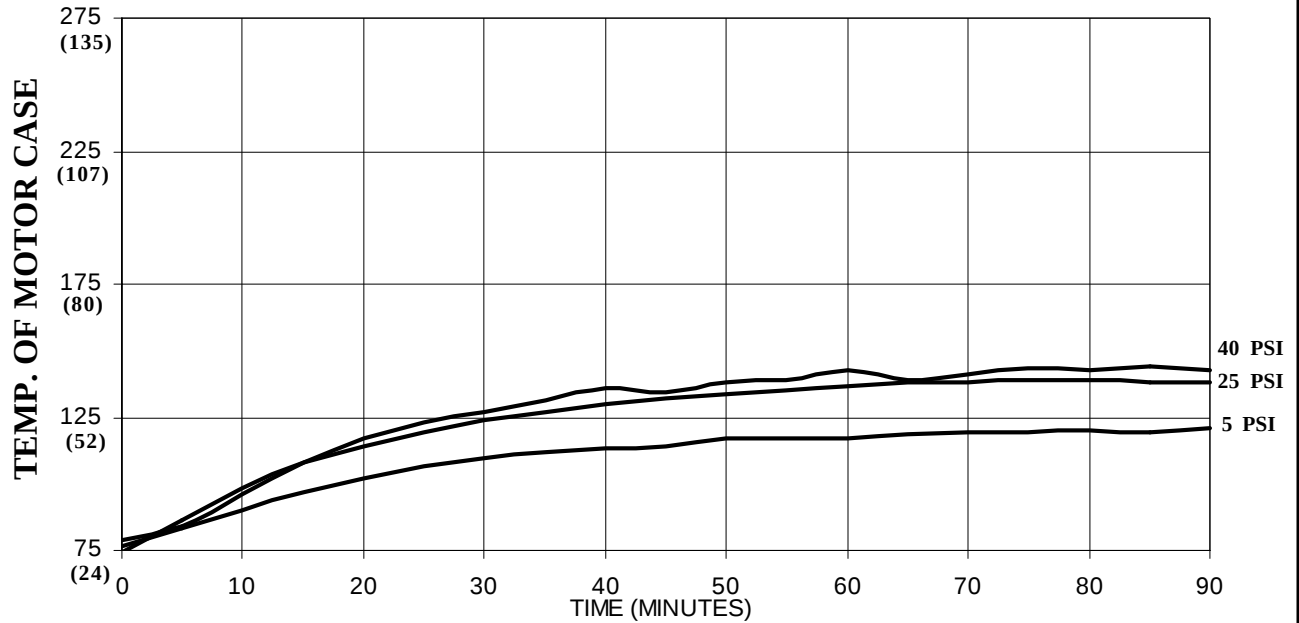

TYPICAL PERFORMANCE

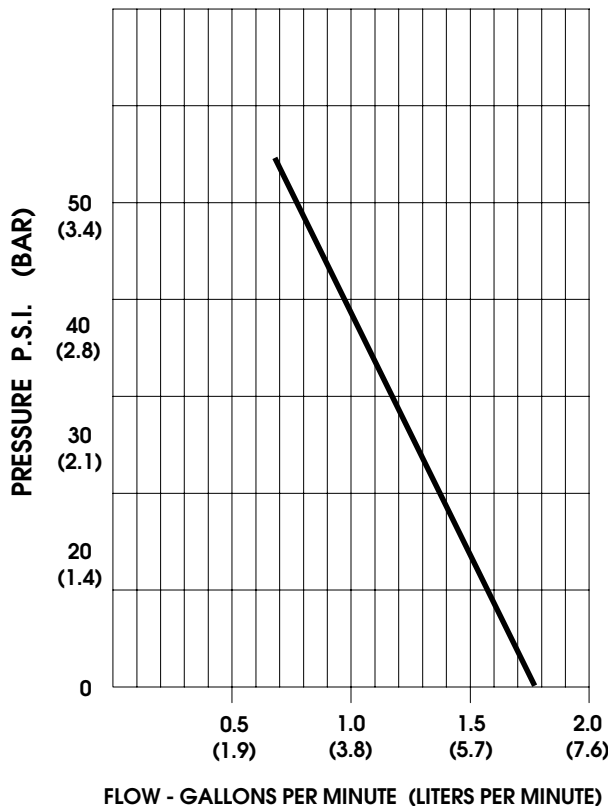

PRESSURE (PSI)	FLOW (GPM/LIT)	CURRENT (AMPS)	VOLTAGE (VOLTS)
OPEN	1.73/6.5	.32	115 VAC
10	1.54/5.8	.38	
20	1.39/5.3	.45	
30	1.18/4.5	.52	
40	.82/3.1	.58	
50	.45/1.7	.64	

-SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

-ALL DATA BASED ON TESTING WITH WATER AT AMBIENT TEMPERATURE.

PumpAgents.com - buy pumps and parts online

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)