
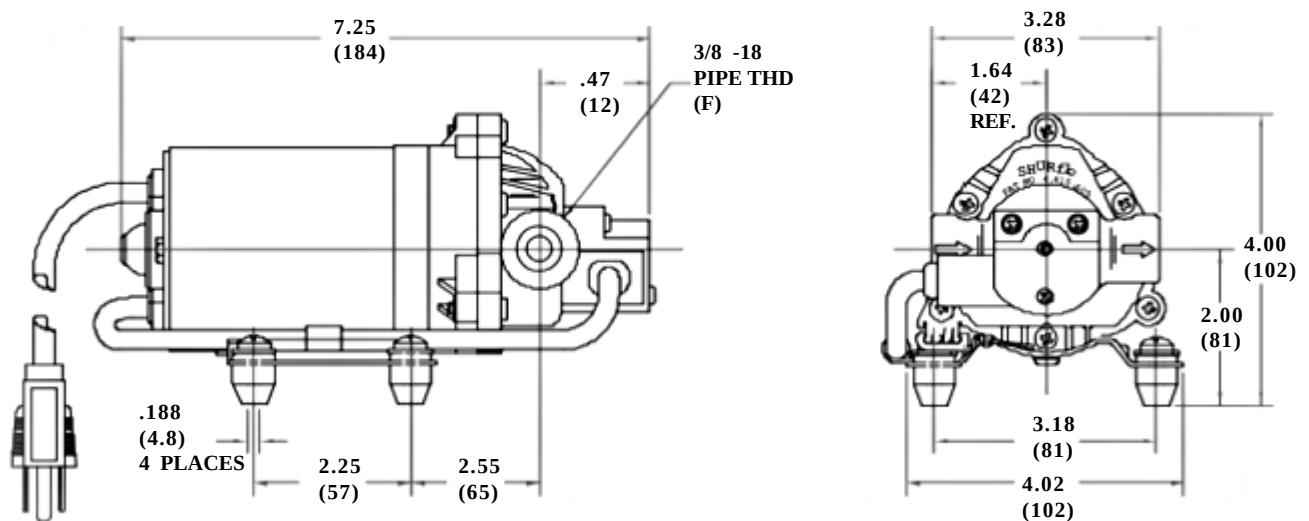


**PRODUCT DATA SHEET****MODEL: 8020-832-280****SPECIFICATIONS:****MODEL NUMBER:** 8020-832-280**PUMP DESIGN:** Positive Displacement 3 Chamber Diaphragm Pump**CAM:** 2.5 Degree**MOTOR:** Permanent Magnet, P/N 11-195-00, Thermally Protected**VOLTAGE:** 115 VAC Nominal**PRESSURE SWITCH:** None**LIQUID TEMPERATURE:** 180 Degrees Fahrenheit (82 Degrees Centigrade) Max.**PRIME:** Self-Priming Up To 4 Ft. Vertical,
Max. Inlet Pressure 30 PSI (2.1 Bar)**PORTS:** 3/8"-18 NPT Female**MATERIAL OF CONSTRUCTION:****PLASTICS-** Nylon**VALVES-** Viton**DIAPHRAGM-** Santoprene**FASTENERS-** Zinc Plated Steel**NET WEIGHT:** 5.2 Lbs (2.36 Kg)**DUTY CYCLE:** Intermittent (See Temperature Rise Chart)**APPROVALS:** UL/CSA Listed**TYPICAL APPLICATIONS:** Soil Extraction/Industrial**BYPASS:** 80 PSI**DIMENSIONS:**

MODEL: 8020-832-280


TEMPERATURE RISE

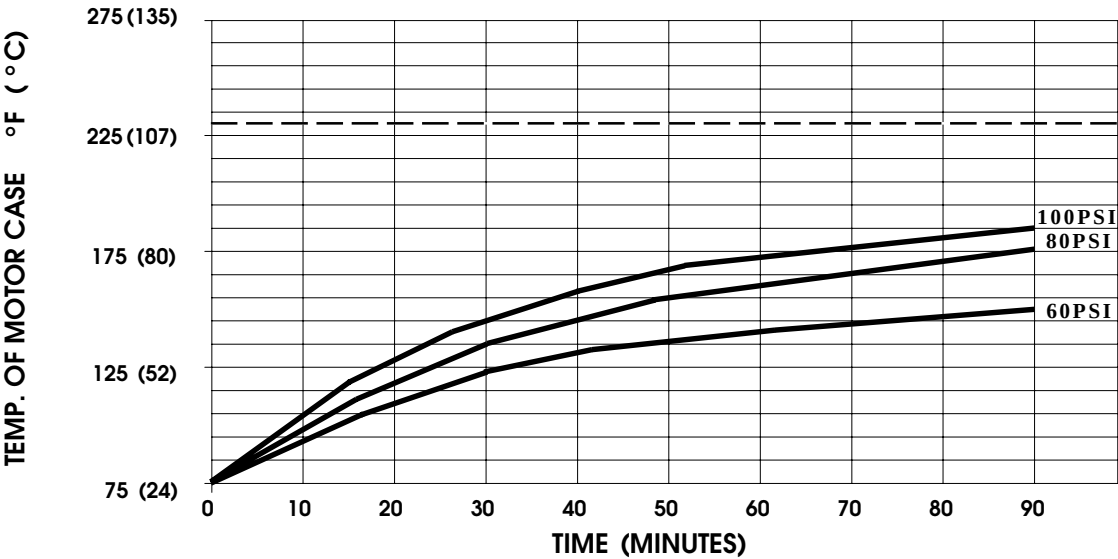

THIS GRAPH IS FOR USE AS A DESIGN GUIDE. IT IS BASED ON RUNNING CONTINUOUSLY WITH AN AMBIENT TEMPERATURE OF 75°F IN STILL AIR. THE THERMAL BREAKER WILL OPEN WHEN THE CASE TEMPERATURE REACHES 230° F.

[- - - - - TRIP POINT OF THERMAL PROTECTOR]

TYPICAL PERFORMANCE

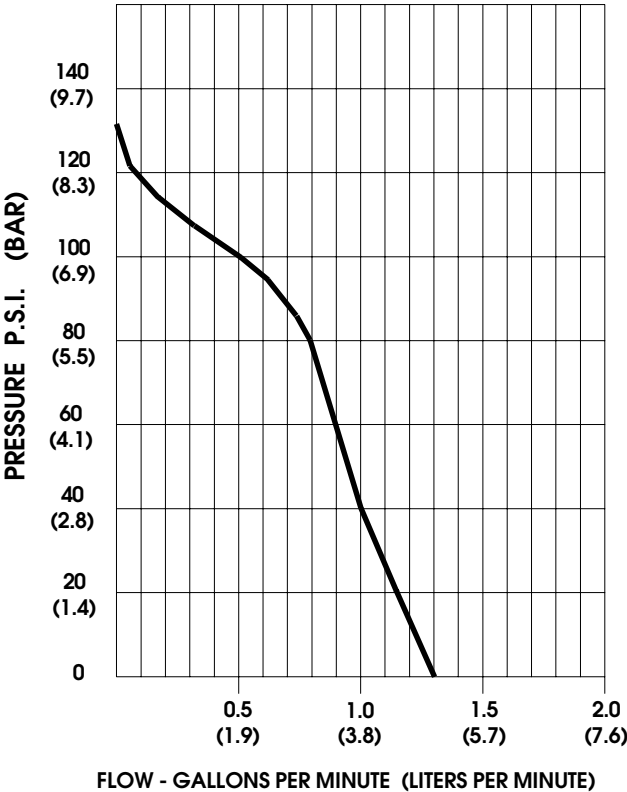

PRESSURE (PSI)	FLOW (GPM/LIT)	RPM MIN/MAX	CURRENT (AMPS)	VOLTAGE (VOLTS)
OPEN	1.30/4.9	2190/2230	0.35	115 VAC
10	1.21/4.6	2095/2160	0.40	"
20	1.14/4.3	2025/2090	0.45	"
30	1.06/4.0	1945/2040	0.50	"
40	1.00/3.8	1875/1980	0.54	"
50	0.96/3.6	1805/1915	0.59	"
60	0.92/3.5	1755/1865	0.63	"
70	0.87/3.3	1700/1820	0.67	"
80	0.80/3.0	1655/1770	0.71	"
100	0.48/1.8	1570/1680	0.78	"
120	0.01/0.4	1515/1675	0.83	"

For technical advice or service please take your pump into your local pump service center.
To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)