
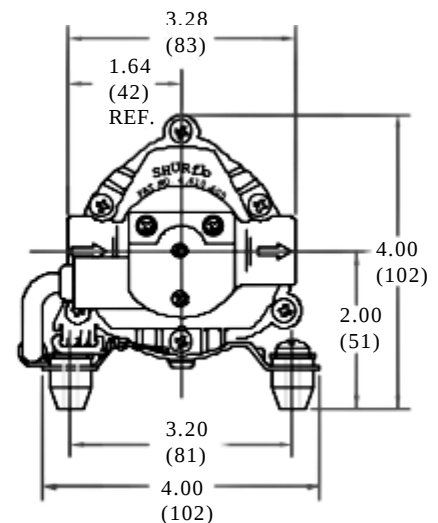


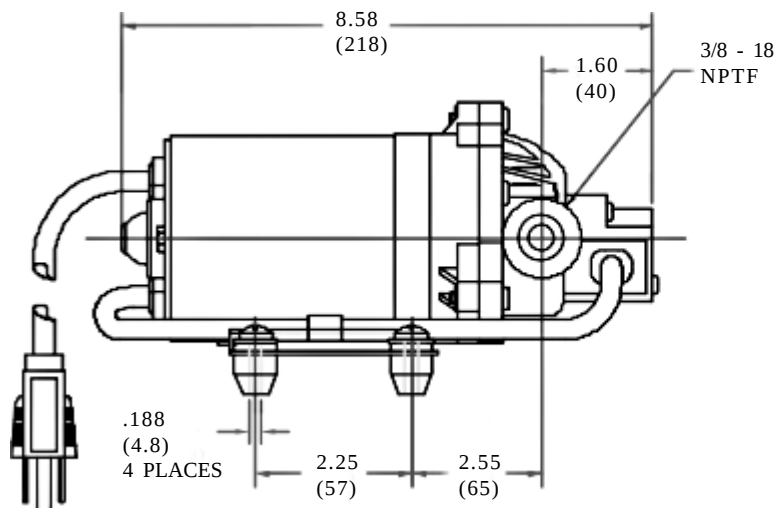


PRODUCT DATA SHEET


MODEL: 8025-733-256**SPECIFICATIONS:****MODEL NUMBER:** 8025-733-256**PUMP DESIGN:** Positive Displacement 3 Chamber Diaphragm Pump**CHECK VALVE:** (1-Way Operation) Prevents Reverse Flow**CAM:** 3.0 Degree**MOTOR:** Permanent Magnet, P/N 11-195-01, Thermally Protected**VOLTAGE:** 115 VAC Nominal**PRESSURE SWITCH:** Adjustable Shut-Off (Range 40-60 PSI)

Factory Set @ 60 PSI, Turn On 45 PSI +/- 5 PSI

LIQUID TEMPERATURE: 180 Degrees Fahrenheit (82 Degrees Centigrade) Max.**PRIME:** Self-Priming Up To 14 Ft. Vertical,
Max. Inlet Pressure 30 PSI (2.1 Bar)**PORTS:** 3/8"-18 NPT Female**MATERIAL OF CONSTRUCTION:****PLASTICS-** Nylon**VALVES-** EPDM**DIAPHRAGM-** Santoprene**FASTENERS-** Zinc Plated Steel**NET WEIGHT:** 5.3 Lbs (2.4 Kg)**DUTY CYCLE:** Intermittent (See Temperature Rise Chart)**APPROVALS:** UL/CSA/NSF Listed**TYPICAL APPLICATIONS:** Soil Extraction, Water Delivery**BYPASS:** 45PSI**DIMENSIONS:**

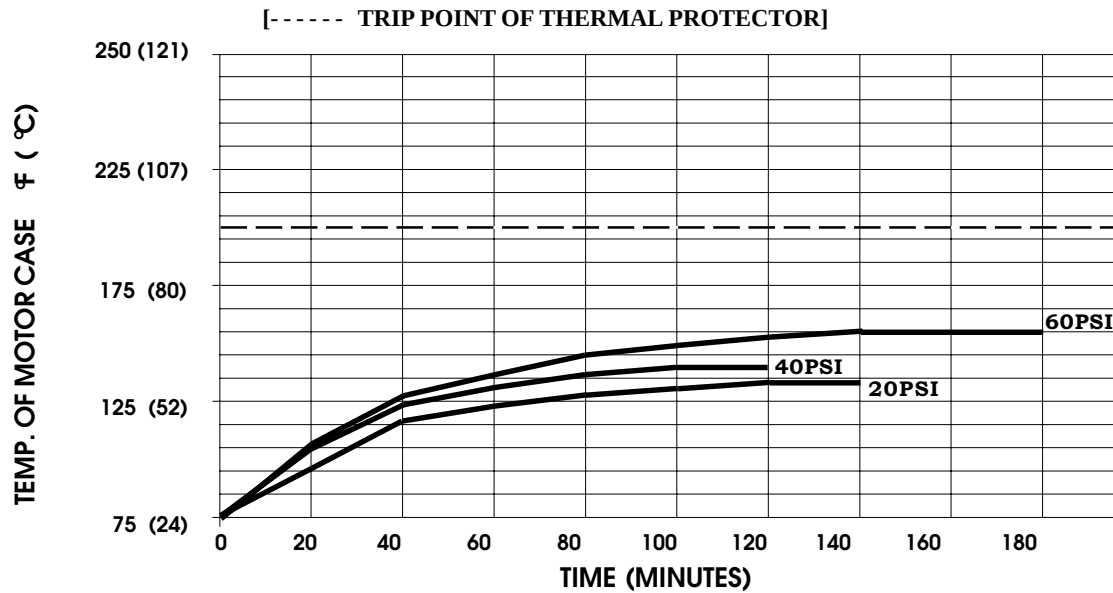TEMPERATURE RISE**MODEL: 8025-733-256**

THIS GRAPH IS FOR USE AS A DESIGN GUIDE. IT IS BASED ON RUNNING CONTINUOUSLY WITH AN AMBIENT TEMPERATURE OF 75° F IN STILL AIR. THE THERMAL BREAKER WILL OPEN WHEN THE CASE TEMPERATURE REACHES 203° F.

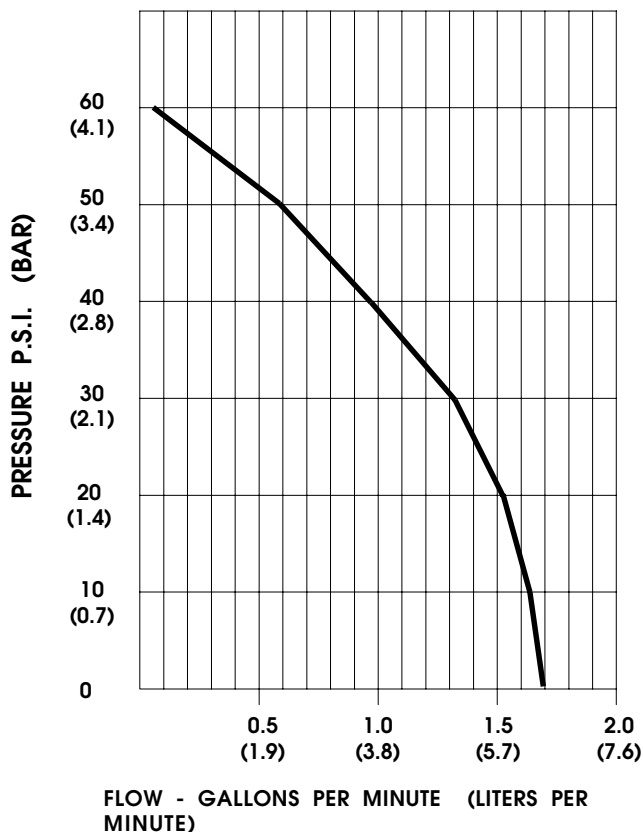TYPICAL PERFORMANCE

PRESSURE (PSI)	FLOW (GPM/LIT)	RPM MIN/MAX	CURRENT (AMPS)	VOLTAGE (VOLTS)
OPEN	1.70/5.7	2135/2150	0.34	115VAC
10	1.63/5.3	2090/2100	0.38	"
20	1.52/5.0	2015/2050	0.44	"
30	1.35/4.7	1960/1965	0.49	"
40	0.86/4.3	1910/1915	0.54	"
50	0.59/4.2	1845/1855	0.59	"
60	0.03/4.0	1700/1795	0.61	"

-SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

PumpAgents.com - buy pumps and parts online

For technical advice or service please take your pump into your local pump service center.
To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)