


Big John Submersible Sump Pumps

10 & 12 Series



Features


- Cast bronze or cast iron pump housing with protective epoxy coating for corrosion and rust resistance
- Oil-filled motor housing for lifetime lubrication and rapid heat dissipation
- 1/2 hp split phase motor
- Stainless steel fasteners
- Mechanical seal (stainless steel spring, nitrile parts, carbon and ceramic faces)
- Bearings: upper and lower ball bearings for extended motor life
- Thermal overload protection
- Nylon switch housing
- Manual and automatic models
- Automatic operation with pressure switch operates when water level is between 8-1/2" to 12". Pump shuts off when water level falls between 1-1/2" to 5" (Pressure switch is non-adjustable)
- UL/CSA listed

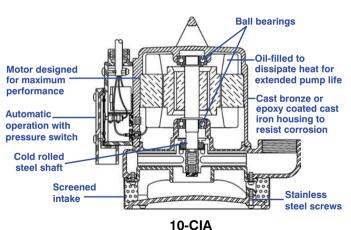


provide afficient and reliable convice in




10 & 12 Series Sump Pumps



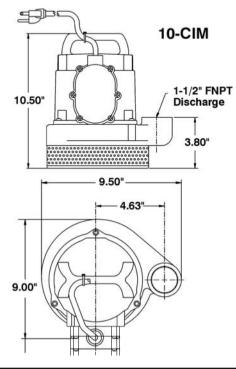

Specifications

| MODEL | ITEM | H.P. | VOLTS | AMPS | WATTS | PERFORMANCE (GPM @ HEAD | | | SHUTOFF SHUTOFF | | POWER | DIMEMSIONS |
|--------|--------|------|-------|-------|-------|-------------------------|-----|-----|-----------------|----------|------------|-------------------|
| NO. | NO. | | | S/R | WAIIS | 5′ | 10′ | 15′ | (FT.) | (P.S.I.) | CORD (FT.) | (H x L x W) (IN.) |
| 10-CIM | 510055 | 1/2 | 115 | 40/11 | 1,100 | 70 | 63 | 45 | 23 | 10 | 10 | 10.5 x 9.3 x 9.5 |
| 10-CIA | 510155 | 1/2 | 115 | 40/11 | 1,100 | 70 | 63 | 45 | 23 | 10 | 10 | 10.5 x 9.3 x 9.5 |
| 10-CIA | 510156 | 1/2 | 115 | 40/11 | 1,100 | 70 | 63 | 45 | 23 | 10 | 25 | 10.5 x 9.3 x 9.5 |
| 12-CBM | 512055 | 1/2 | 115 | 40/11 | 1,100 | 83 | 66 | 50 | 26 | 11.2 | 10 | 10.5 x 8.5 x 9.5 |
| 12-CBA | 512155 | 1/2 | 115 | 40/11 | 1,100 | 83 | 66 | 50 | 26 | 11.2 | 10 | 10.5 x 8.5 x 9.5 |
| 12-CBA | 512125 | 1/2 | 115 | 40/11 | 1,100 | 83 | 66 | 50 | 26 | 11.2 | 25 | 10.5 x 8.5 x 9.5 |



Construction

| Motor Housing | Epoxy-coated Cast Iron on #10 Series | | | | | |
|-----------------------|---------------------------------------|--|--|--|--|--|
| | (Cast bronze on #12 Series) | | | | | |
| Impeller Material | Nylon | | | | | |
| Impeller Type | Non-Clog | | | | | |
| Volute | Epoxy-coated Cast Iron on #10 Series | | | | | |
| | (Cast bronze on #12 Series) | | | | | |
| Power Cord | 16-3 SJTW | | | | | |
| Mechanical Shaft Seal | Nitrile parts, carbon & ceramic faces | | | | | |
| Fasteners | Stainless Steel | | | | | |
| Shaft | CRS | | | | | |
| Bearings | Stainless Steel upper & lower ball | | | | | |
| | bearings | | | | | |

Little Giant Pump Co

For technical advice or service please take your pump into your local pump service center. To order pump or parts or for pricing please go to the following links : ______Little Giant Pumps Home >> ______Little Giant Pumps stock list >>