


VCMA-15 SERIES

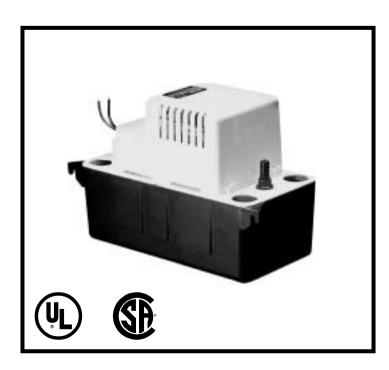

Features

- Vertical type pump unit
- 1/2 gallonLeakproof, rustproof, ABS tank with mounting tabs
- Stainless steel motor shaft
- 3 drain holes
- 3/8" O.D. barbed discharge adapter
- Optional Safety Switch
- 15' shut-off head
- 6' power cord
- UL/CSA listed
- Thermal overload protected
- Suitable for High-Efficiency, gas furnace condensate


Construction


- Motor 1/60 HP
- Intermittent Liquid Temp. up to 120° F
- Discharge 3/8" OD barbed
- Housing ABS
- Cover ABS
- Volute Glass filled polypropylene
- Impeller Glass filled polypropylene

The VCMA Series is a fully automatic condensate removal pump with 1/2 gallon capacity. The series features a vertical-type pump with stainless steel motor shaft, rust proof, high-impact ABS tank and motor cover, 3 drain holes, removable 3/8" O.D.barbed check valve. (ULS) models include a safety switch that can be connected to

PumpAgents.com - Click here for Pricing/Ordering


VCMA-15 SERIES

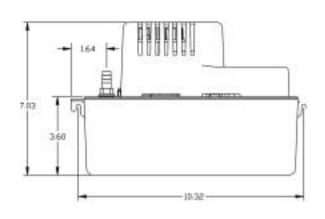

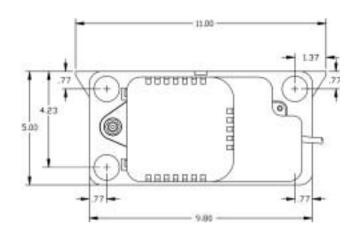

Specifications

									Performance (GPH @ Head)			Shut Off		Pwr. Cord	Weight	
Model No.	Item No.	Discharge Size	Listing(s)	HP	Volts	Hertz	Amps	Watts	1'	5'	10'	20'	Feet	PSI	(ft)	(Lbs.)
VCMA-15UL	554401	3/8" OD Barbed	UL/CSA	1/60	115	60	1	60	65	50	25	0	15	6.5	6	4.40
VCMA-15ULT	554411	3/8" OD Barbed	UL/CSA	1/60	115	60	1	60	65	50	25	0	15	6.5	6	5.80
VCMA-15ULS	554405	3/8" OD Barbed	UL/CSA	1/60	115	60	1	60	65	50	25	0	15	6.5	6	4.40
VCMA-15ULST	554415	3/8" OD Barbed	UL/CSA	1/60	115	60	1	60	65	50	25	0	15	6.5	6	5.80

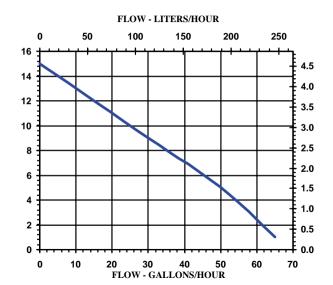

Replacement Parts

Tank	154401
Cover, Tank	154411
Motor/Pump Assy	154491
Cover, Motor	154421
Float Arm	154452
Switch Holder	154471
Switch	950337

Little Giant Pump Co