Little GIANT®

2-MD-SC SERIES





Features


- Thermally protected, open, fan-cooled motor
- Sleeve bearings
- 6' power cord with 3-prong plug (no plug on 230V)
- Specific gravity to 1.1
- Fluid temperature to 150°F
- Ambient air temperature to 77°F **NOTE:** Consult your local distributor or the factory for applications with higher ambient temperatures, specific gravities and viscosities.

Construction

- Volute Glass-filled polypropylene
- Housing Glass-filled polypropylene
- Impeller Glass-filled polypropylene
- Shaft Ceramic
- Thrust Washers Ceramic
- O-Ring Nitrile

The Little Giant MD-SC series features leakproof, seal-less magnetic drives and are designed for in-line, non submersible use. Volute, magnet housing and impeller are glass-filled polypropylene for excellent chemical resistance. Ceramic shaft and thrust washers are 99.5% pure alumina for excellent wear and trouble-free service. Pumping heads are easily rotated, cleaned or serviced with no special tools required. Spindle shaft is supported at both ends to prevent impeller damage during start-up and stop of pump.


2-MD-SC SERIES

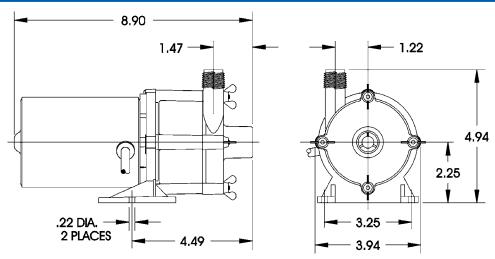

NOTE: Designs and dimensions may vary for various reasons (i.e. type of motor). This information should be used as general guide rather than an unqualified guarantee. Specifications are subject to change without prior notice.

Specifications

Model	Item	Intake	Discharge							Perfor	mance (GPH @	Head)	Shu	t Off	Power	Weight
No.	No.	Size	Size	Listing(s)	HP	Volts	Hertz	Amps	Watts	1'	3'	6'	9'	Feet	PSI	Cord (ft.)	(lbs.)
2-MD-SC	580503	1/2" FNPT	1/2" MNPT	UR/C-CSA	1/25	115	60	1.4	109	510	465	410	330	14.6	6.3	6	6.25
2-MD-SC	580513	1/2" FNPT	1/2" MNPT	UR/C-CSA	1/30	230	50/60	.65/.64	105/100	510	465	410	330	14.6	6.3	6	6.25
2-MD-SC	580598	1/2" FNPT	1/2" MNPT		Pump	Head L	ess Moto	r									1.83



FLOW - LITERS/HOUR 0 500 1000 1500 2000 16 14 4.0 12 HEAD - FEET 10 8 6 4 1.0 2 0 0.0 100 0 200 300 400 500 600 FLOW - GALLONS/HOUR 60 Hz 50 Hz

Replacement Parts

ITEM	PART NO.	DESCRIPTION
Α	180079	Volute
В	924007	O-Ring
С	921077	Thrust washer
D	180100	Impeller
Е	180059	Shaft
F	180004	Housing
1	920003	Wing nut
2	920003	Stud, collared
3	180602	Drive magnet
4	180031	Mounting bracket (115V)
4	180037	Mounting bracket (230V)

NOTE: Parts A-F contact fluid

PO Box 12010 • Oklahoma City, OK 73157

Phone: 800.701.7894 • Fax: 800.701.8046 E-mail: customerservice@littlegiant.com

Form 995752 — 02/2001