




A WILO BRAND

MOTORPUMP™ — 3500 RPM

Iron, 60 Hz, 1.5 X 1.5 X 4.38 NPT



51 J56

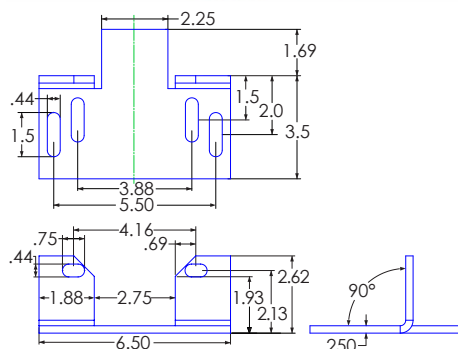

Motor Dimensions NEMA J56 Frame 3500 RPM							
HP	Type	3 Phase			1 Phase		
		L	O	AB	L	O	AB
0.50	ODP	8.26	6.46	3.32	9.06	8.37	3.25
0.75	ODP	8.65	6.46	3.32	9.56	8.37	3.25
1.0	ODP	8.65	6.46	3.32	9.81	8.37	3.25
1.5	ODP	9.04	6.46	3.32	10.31	8.37	3.25
2.0	ODP	9.44	6.46	3.32	10.31	8.37	3.25
0.50	TEFC	9.48	7.33	5.87	9.43	8.10	5.31
0.75	TEFC	9.48	7.33	5.87	9.43	8.10	5.31
1.0	TEFC	10.27	7.33	5.87	10.59	8.10	5.31
1.5	TEFC	11.06	7.33	5.87	10.59	8.10	5.31
2.0	TEFC	11.85	7.33	5.87	11.77	8.10	5.31

Motors are Standard Efficient with the exception of the 1-2 HP 3 phase TEFC, which are Premium Efficient.

DRAWING DEPICTS 56J 1PHASE MOTOR
ALL DIMENSIONS IN INCHES

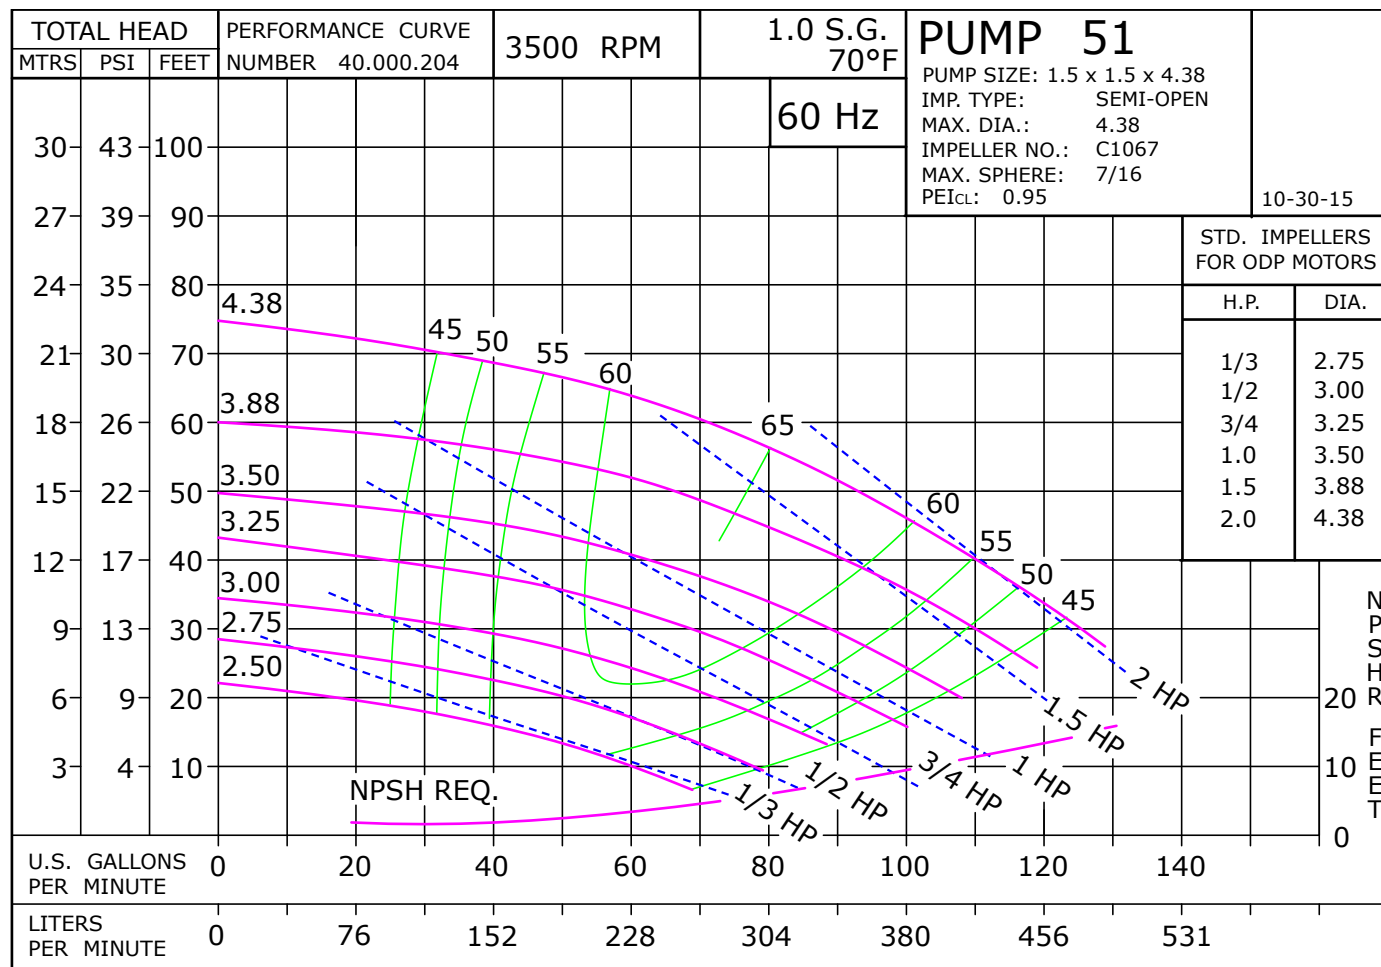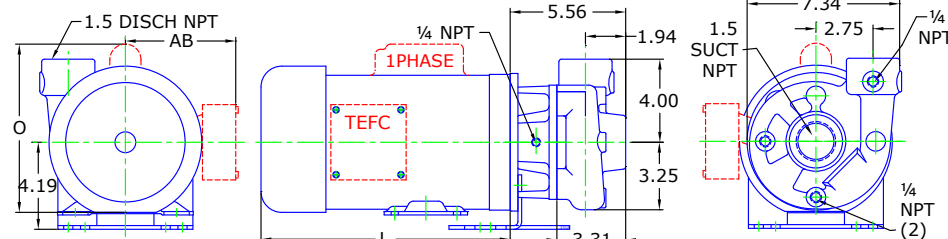


MOTORPUMP™ — 3500 RPM

Iron, 60 Hz, 1.5 X 1.5 X 4.38 NPT

51 J56

Parts

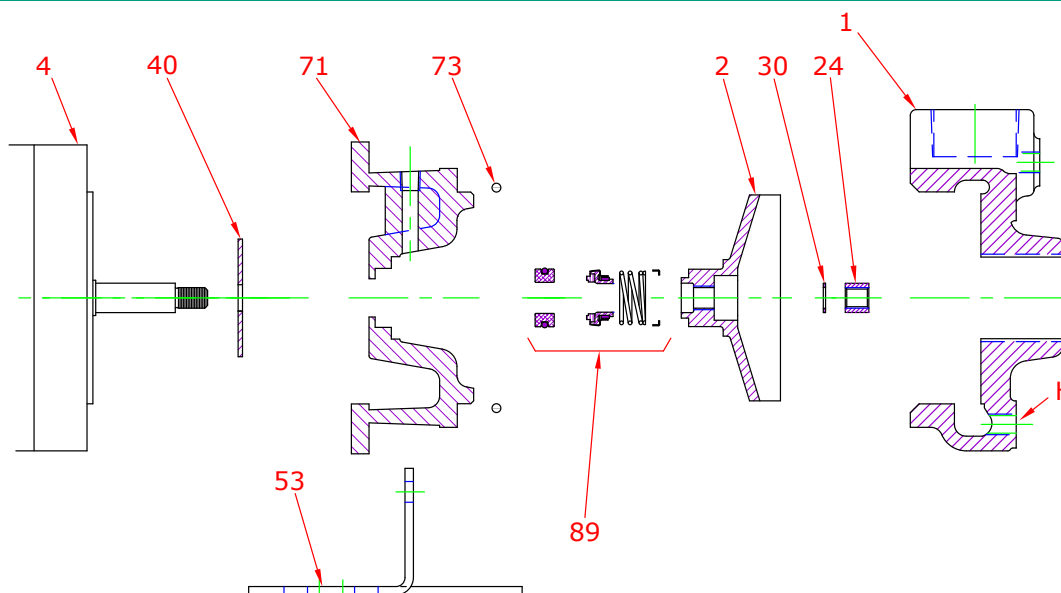

Key No.	Part Name	Part Number	
1	Case 51, Iron, 1.50 X 1.50 NPT Brass plugs	130.000.177X	
2	Impeller 51, Bronze, Specify Dia., 4.37 Max 7/16" Thrd	137.000.119	
	Impeller 51, Iron, Specify Dia., 4.37 Max, 7/16" Thrd	137.000.118	
4	Motor chart, J56 3.5" Rigid Base	See Chart	
	Motor chart, J56 Round Body	See Chart	
24*+	Nut, Stainless	105.000.465	
30*+	D Washer, Stainless	104.000.168	
40*	Flinger, Neoprene	104.000.171	
53	Base, Steel	119.000.231A	
71	Adapter, Iron, J56, 5/8" Seal, with Cad plug	132.000.207X	
73*	Gasket, Case, Buna	116.000.141	
89*	Seal, 5/8", Type 21, EPDM-CARB/CM, With retainer	101.000.327	
	Seal, 5/8", Type 21, EPDM-CARB/SIL, With retainer	101.000.173	
	Seal, 5/8", Type 21, EPDM-SIL/SIL, With retainer	101.000.236	
	Seal, 5/8", Type 21, VN-CARB/CM, With retainer	101.000.103	
	Seal, 5/8", Type 21, VN-CARB/SIL, With retainer	101.000.120	
	Seal, 5/8", Type 21, VN-SIL/SIL, With retainer	101.000.239	
	Seal, 5/8", Type 6, BN-CARB/CM, No retainer	101.000.110	
KIT		3 Phase:	1 Phase:
	Repair Kit, 5/8" BN-CARB/CM Seal	118.000.341	118.000.341.1
	Repair Kit, 5/8" EPDM-CARB/CM Seal	118.000.341G	118.000.341D.1
	Repair Kit, 5/8" EPDM-CARB/SIL Seal	118.000.341C	118.000.341G.1
	Repair Kit, 5/8" EPDM-SIL/SIL Seal	118.000.341D	118.000.341C.1
	Repair Kit, 5/8" VN-CARB/CM Seal	118.000.341A	118.000.341A.1
	Repair Kit, 5/8" VN-CARB/SIL Seal	118.000.341B	118.000.341B.1
	Repair Kit, 5/8" VN-SIL/SIL Seal	118.000.341F	118.000.341F.1

* Denotes components included in repair kit.

+ Not required on 1/3 to 1-1/2 HP 1 phase motors.

Use 3 phase kits on 2-3 HP 1 phase motors.



A WILO BRAND

MOTORPUMP™ — 3500 RPM

Iron, 60 Hz, 1.5 X 1.5 X 4.38 NPT


51 J56

Motor Charts

Motor Chart							
J56 Frame, Round Body - 3500 RPM - 1 & 3 Phase							
1 PHASE 60 Hz 3500 RPM				3 PHASE 60 Hz 3500 RPM			
115/230V			208-230/460V			575V	
HP	ODP	TEFC	HP	ODP	TEFC	ODP	TEFC
1/3	113.000.101	REPLACED BY 3.5" RIGID BASE	1/3	113.000.365	REPLACED BY 3.5" RIGID BASE	-	-
1/2	113.000.102		1/2	113.000.366		113.000.506	
3/4	113.000.103		3/4	113.000.354		113.000.502	
1	113.000.104		1	113.000.372		113.000.469	
1.5	113.000.143		1.5	113.000.360		113.000.411	
2	113.000.348		2	113.000.349		113.000.562	
3	113.000.581		3	113.000.368		113.001.347	

Motor Chart							
J56 Frame, 3.5" Rigid Base - 3500 RPM - 1 & 3 Phase							
1 PHASE 60 Hz 3500 RPM				3 PHASE 60 Hz 3500 RPM			
115/230V			208-230/460V			575V	
HP	ODP	TEFC	HP	ODP	TEFC	ODP	TEFC
1/3	113.000.880	137.001.633	1/3	-	-	-	-
1/2	113.000.116	113.000.929	1/2	113.000.118	113.001.154	137.001.634	113.001.211
3/4	137.001.439	113.000.167	3/4	137.001.080	137.001.223	137.001.635	137.002.416
1	137.001.097	137.001.352	1	137.001.081	137.001.232	137.001.636	137.001.548
1.5	137.001.658	137.001.538	1.5	137.001.069	113.000.409	137.001.456	137.002.409
2	137.001.671	137.001.204	2	137.001.052	137.001.211	137.001.637	137.001.774
3	137.001.672	137.001.539	3	137.001.082	137.001.188	137.001.503	137.002.544
5	-	-	5	137.001.134	-	-	-

D1009
D1367
K21Scot Pump, A Wilo Brand
+1-262-377-7000
scot.sales@wilo.com

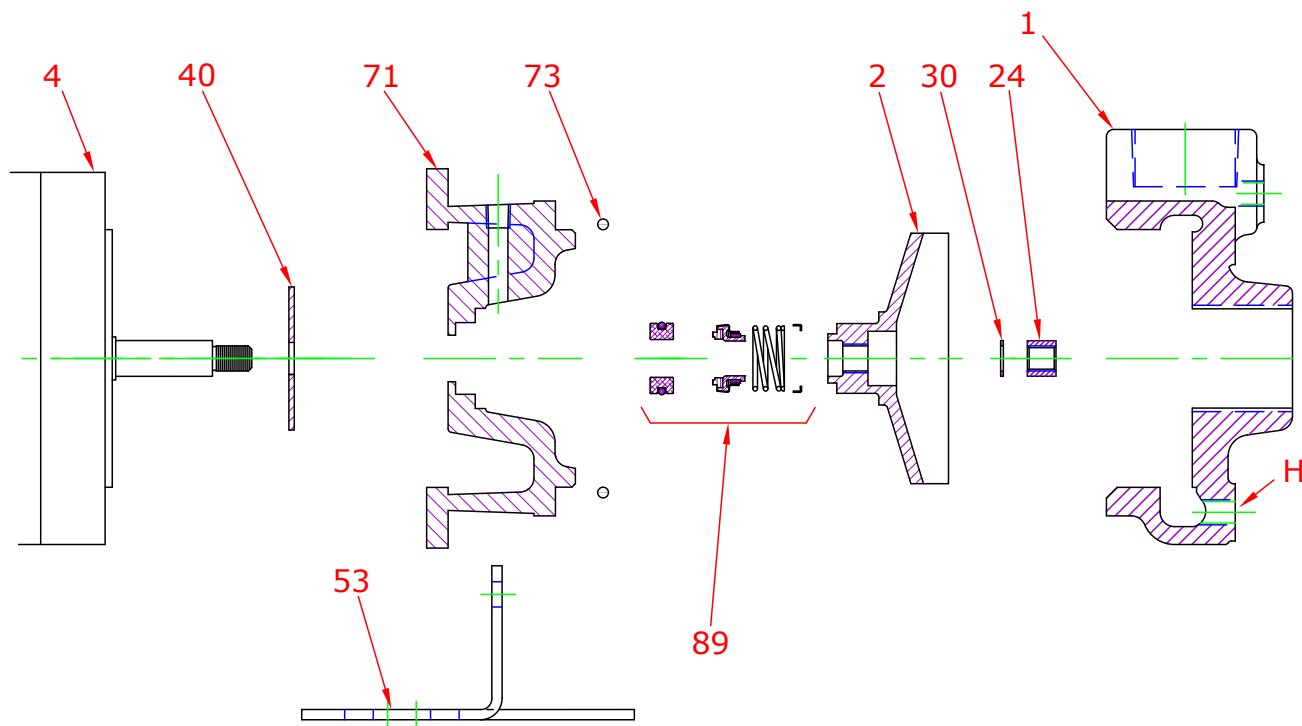Construction Options


Construction Options				
Key	Part Name	Standard Fitted	Bronze Fitted	All Iron
1	Case	Iron	Iron	Iron
2	Impeller	Iron	Bronze	Iron
24	Impeller Locknut	Stainless	Stainless	Stainless
30	D-Washer	Stainless	Stainless	Stainless
40	Flinger	Neoprene	Neoprene	Neoprene
53	Base	Steel	Steel	Steel
71	Adapter	Iron	Iron	Iron
73	Gasket, Case	Buna	Buna	Buna
89	Mechanical Seal, Type 6 BN-CM	Standard	Standard	Standard
H	Plug, Drain	Brass	Brass	Plated Steel