

MARINE PRODUCT DATA SHEET

OEM
AFTERMARKET

3101-000
N/A



Aqua Tiger



TYPICAL APPLICATIONS

General plumbing applications where a flooded inlet is provided, such as livewell filling and circulation, liquid transfer, shower pump or washdown systems 24V DC. For other applications, contact SHURflo.

PUMP

Type: Centrifugal Pump
Ports: 3/4" NPTF
Liquid: 130 °F [54 °C] Max
Prime: Flooded Inlet
Inlet PSI: 30 PSI [2.1 Bar] Max
Run Dry: No

ELECTRICAL

Motor: 24VDC Permanent Magnet, Continuous Duty
Protection: External Fuse
Leads: 14 AWG, 17 1/2" [44cm] Red +, 18 1/2" [47cm] Black -
Fuse: 7.5 Amp Recommended
Control: No Control

MATERIALS

Housing: Stainless Steel
Impeller: Stainless Steel
Hardware: Stainless Steel

APPROVALS

Ignition Protected, ISO 8846

WARRANTY

1 Year Limited Warranty
See SB-1050 For Full Warranty Details


SHIPPING

Net Weight (Boxed): 6.8 Lb [3.1 Kg] each
Carton Weight: 6 each, 41 Lb [18.5 Kg]
Carton Size: 24"L x 18"W x 6"H
[61cm x 46 cm x cm]

RELATED DOCUMENTS

Catalog: MS-030-083 / 030-084
Installation Manual: 911-548
Maintenance: 911-548
Applications Spec Guide: MS-020-005
Warranty: SB-1041 / SB-1050

Parts Kits

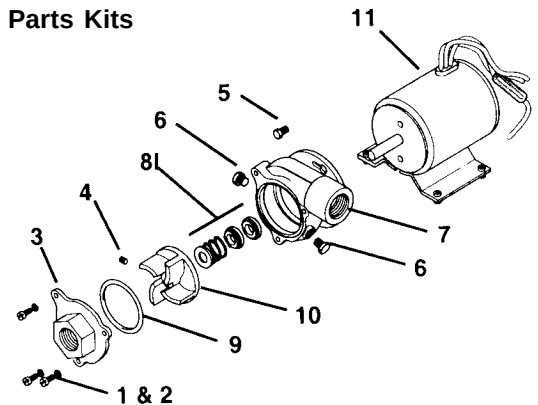

Item	Description	Qty
1	Cover Screw	3
2	Lock Washer	3
3	Cover	1
4	Set Screw (3/32")	1
5	Hex Head Screw (5/16")	2
6	Pipe Plug (7/16")	2
7	Housing	1
8	Mechanical Seal Assembly	1
9	O-ring, Viton	1



MARINE PRODUCT DATA SHEET

OEM

3101-000


AFTERMARKET

N/A




TYPICAL PERFORMANCE @ 24V DC

PRESSURE		FLOW		CURRENT
BAR	PSI	GPM	LPM	AMPS
0.00	0	20.0	75.7	5.2
0.13	2	18.0	68.1	4.8
0.27	4	14.0	52.9	4.1
0.41	6	10.0	37.8	3.8
0.68	8.6	0.0	0.0	2.8

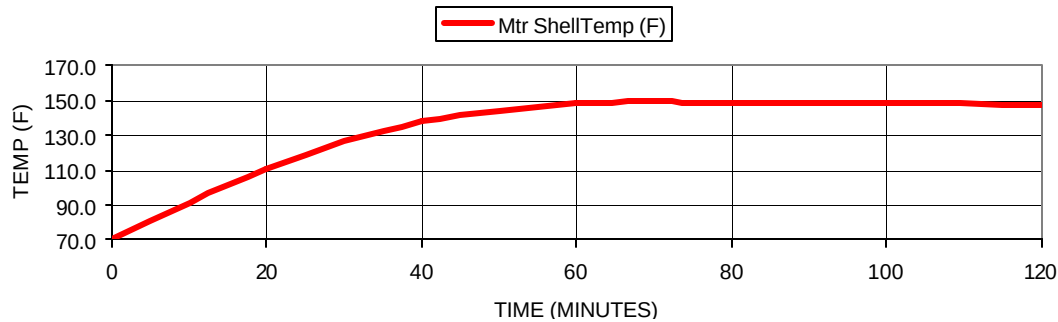

DIMENSIONS [mm]

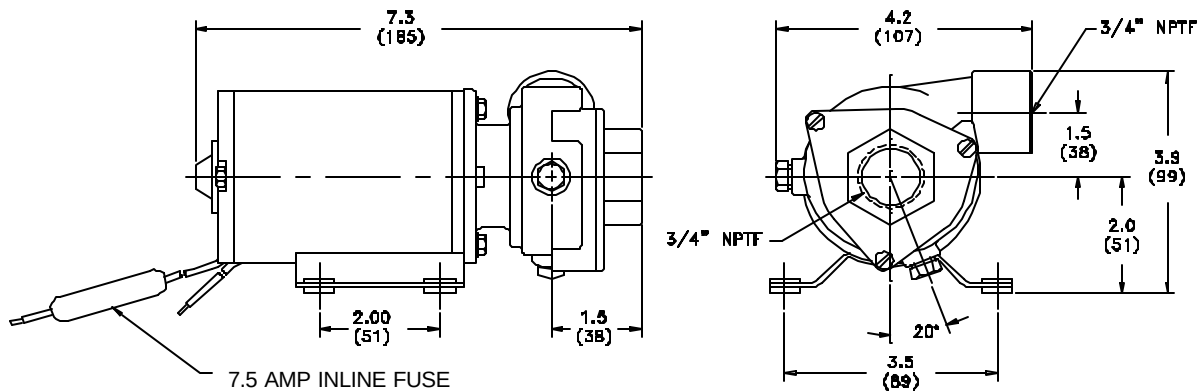

*ISO Registered Facility

PumpAgents.com - buy pumps and parts online

SHURflo reserves the right to update specifications, prices, or make substitutions.



For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)